

CRESWICK

NEW GLASS DOOR



A large convection wood fire with modern glass style


- Efficiently heats large sized areas
- Modern glass door
- Fan fitted for convection heating
- 6mm steel firebox for durability

FINISH	VHT Black
STAND	Pedestal
FIREBOX	Steel
ESTIMATE PEAK OUTPUT	25kW
APPROX. HEAT AREA	250m ²
EMISSIONS	0.9g/kg
EFFICIENCY	66%
DIMENSIONS (WxDxH)	810 x 610 x 865mm
FIREBOX DIMENSIONS (WxDxH)	605 x 470 x 365mm
LOG SIZE	560mm
WEIGHT	165kg
FLUE SPIGOT SIZE	6"/150mm



Minimum distance to heat sensitive materials (mm) when a flue deflector is fitted, and floor protector sizes as per standard AS/NZS 2918:2001.

FLUE SHIELD	A	B	C	D	E	F	G	H
FUF	125	450	300	83	225	311	855	586
AGA	375	550	300	83	225	561	955	586
	I	J	K	L	M	N	R	W
FUF	612	912	974	1425	1224	645	780	652
AGA	612	912	1024	1284	1124	645	639	652

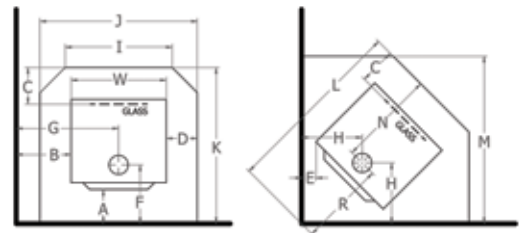

FUF: Flomet Universal Flue system with full length decorative heat shield.

AGA: Acom/Air Group Special Insulated Flue System

