

# RUBYVALE



6MM RADIANT COOKTOP

A compact radiant fire which will heat small areas with versatile installation options.


- Efficiently heats small areas
- 6mm radiant cook top
- 6mm steel firebox for durability

FINISH	VHT Black
STAND	Pedestal
FIREBOX	Steel
ESTIMATE PEAK OUTPUT	15kW
APPROX. HEAT AREA	160m <sup>2</sup>
EMISSIONS	1.2g/kg
EFFICIENCY	64%
DIMENSIONS (WxDxH)	623 x 522 x 690mm
FIREBOX DIMENSIONS (WxDxH)	372 x 316 x 284mm
LOG SIZE	320mm
WEIGHT	105kg
FLUE SPIGOT SIZE	6"/150mm



Minimum distance to heat sensitive materials (mm) when a flue deflector is fitted, and floor protector sizes as per standard AS/NZS 2918:2001.

FLUE SHIELD	A	B	C	D	E	F	G	H
FUF	125	300	300	100	100	315	612	446
AGA	150	350	300	100	100	340	662	446
	I	J	K	L	M	N	R	W
FUF	522	822	908	1224	1050	593	631	623
AGA	522	822	933	1224	1050	593	631	623

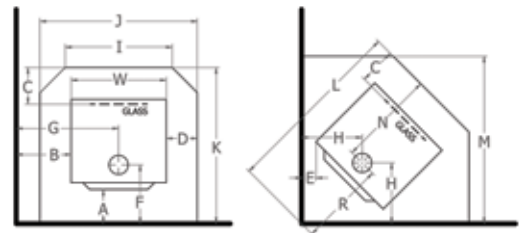

FUF: Flomet Universal Flue system with full length decorative heat shield.

AGA: Acom/Air Group Special Insulated Flue System

