



DESCRIPTION

The IXG-DM7-HID is an IP video entrance station for the IXG Series multi-tenant system. It is equipped with a 7 inch LCD directory screen that is used for calling a tenant or entering an access entry code. Up to 9,999 names/numbers can be stored in the station. A motion sensor will activate the screen when the visitor approaches. Once a call is placed, the visitor will be displayed on the tenant station or app using the 720p HD camera. The station is equipped with an HID card reader for card access. It supports Prox or iCLASS® 26 bit cards. Up to 10 entrance stations can be within a unit (i.e. interior, exterior) with multiple units allowed in the system.


FEATURES

- 7" touchscreen
- PoE compliant
- On-board recording with microSD card
- Simple user interface
- Hands-free audio communication
- 720p HD camera
- Up to 9,999 names/numbers can be stored
- Programmable contact inputs and outputs
- Motion sensor to activate LCD
- Built-in HID reader for card access
- Stainless steel panel
- Rugged IP65 and IK08 ratings

IXG-DM7-HID

IP Video Entrance Station

FEATURE CALL-OUT

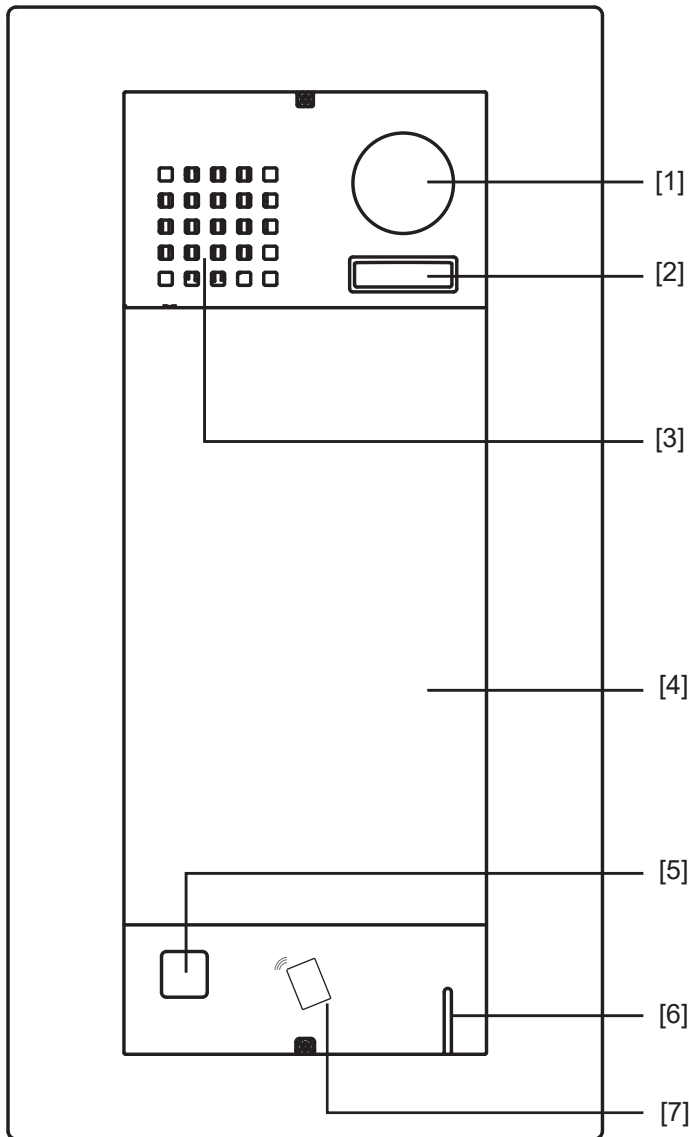

FEATURE CALL-OUT DEFINITIONS

- [1] Camera
- [2] White LED
- [3] Speaker
- [4] LCD Touch Screen
- [5] Sensor
- [6] Microphone
- [7] HID card reader

SPECIFICATIONS

- Power Source: PoE (IEEE 802.3af Class 0)
- Consumption: 5.3 W Standby, 11.6 W Max.
- Screen: 7" TFT LCD Display
- Monitor resolution: 800 x 400
- Communication: Full-duplex
- Audio Codec: G.711(μ -law, A-law)
- Video Codec: H.264
- Protocol: IPv4/v6, TCP, UDP, SIP, HTTP, HTTPS, RTSP, RTP/RTCP, IGMP, MLD, SMTP, FTP, DHCP, NTP, DNS, TLS
- Operating Temp: -22° ~ 140°F (-30° ~ 60°C)
- Dimensions: 13-¹¹/₁₆" H x 7-³/₁₆" W x 2" D