

TVT




TD-9821E2

2 MP Network Camera

TVT


2 MP Network Camera



Features

- 2MP (1920 × 1080) full real time coding
- Max .resolution: 1920 × 1080
- Support H.265, H.264 and MJPEG encoding
- Support Micro SD card local image / video storage, alarm pre-recording, auto overwriting, auto uploading and breakpoint resume
- Support BLC, HLC, WDR and image flip
- Support three streams
- Support corridor mode / defogging / digital image stabilization / privacy mask / scene mode setting
- Support 8 ROI coding

Dimensions

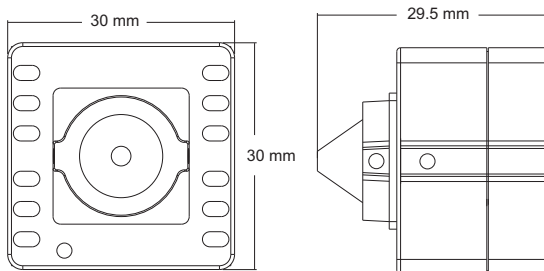

Specifications

Specifications	Model	TD-9821E2
Camera		
Image Sensor		1 / 3 "CMOS
Image Size		1920 × 1080
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Iris		Fixed iris
Min. Illumination		Color: 0.1 Lux@F1.2; B / W: 0.01 Lux@F1.2
Lens		4.3 mm HD pinhole lens
Day & Night		Yes
Wide Dynamic Range		Yes
Digital NR		3D DNR
BLC		Yes
HLC		Yes
Angle Adjustment		Adjusted by its support
Image		
Video Compression		H.265 / H.264 / MJPEG
H.264 Compression Standard		Baseline Profile / Main Profile / High Profile
Resolution		1080P (1920×1080), 720P (1280×720), D1
Multi-stream Frame Rates		1080P (1 ~ 30fps) / 720P (1 ~ 30fps) / D1 (1 ~ 30fps)
Bit Rate		32 Kbps ~ 16 Mbps
Encode Mode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
ROI		8 ROI
Interfaces		
Network		RJ45
Audio		One built-in microphone
Video Output		1Vp-p Composite Output (75Ω/BNC)
Storage Card		Up to 128GB
Functions		
Remote Monitoring		IE browsing,CMS remote control
Online Connection		Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF, GB-T/28181-2011
Image Snapping		JPEG encoding; image quality adjustable
Others		
Power Supply		DC12V
Power Consumption		≤2W
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)		30 × 30 × 29.5
Weight (net)		97g
Installation		Hung by the wall or installed with its support

Available Model

Available Model	TD-9821E2 (D)
-----------------	-----------------