

SOLID BACK WALL – 1000MM WIDE

Spec Sheet

Last Updated: June 26, 2023

For further information regarding any of our rental products please refer to the product listing on the website – www.timbermillrentals.com

Important Notes!


Please note, all items are handcrafted and will always have some kind of slight variation and you will need to allow for tolerance if getting any signage or similar created off these dimensions.

Please read our general signage document for information on applying signage to our bars.


Timbermill holds no responsibility for anything created based off these dimensions.

All drawings and products are copyright to Timbermill PTY LTD.


FRONT VIEW

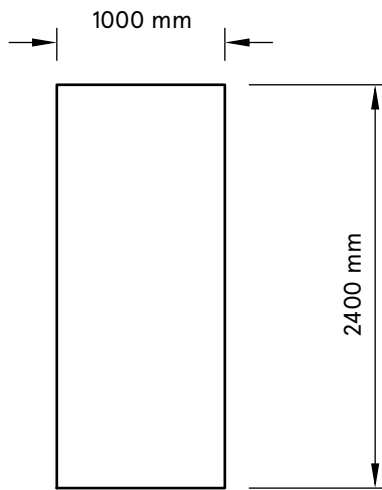


TOP VIEW

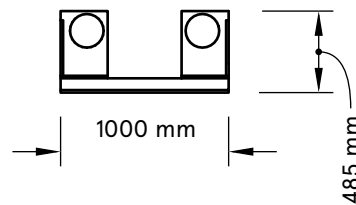

SIDE VIEW

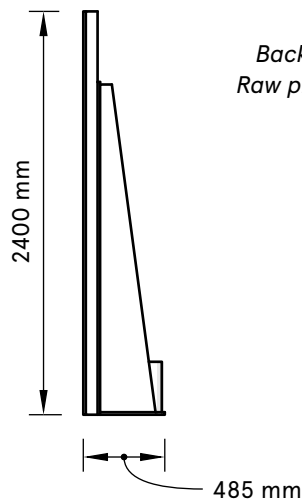

BACK VIEW

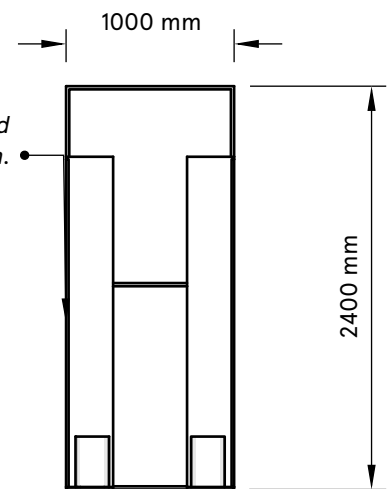

WALL JOINING NOTES

- This drawing shows a single 1000mm W wall panel.

These walls can be joined in up to 8000mm lengths.

- Anything up to 3000mm long will have 2 back supports.

- Anything between 3001-5000mm L will have 3 back supports.

- Anything between 5001-8000 will have 5 back supports.

Important Note!

Join lines at 1000mm intervals will always be slightly visible

ENGINEERING NOTES!

These structures have engineering approval based on the below:

- Maximum 10kg added per metre of wall, applied to wall as flush as possible.
- 20kg sandbag required per metre of wall with back support fixed, this is for Indoor use only. Timbermill to install.
- Walls are not designed or engineered for outdoor use, if you require a custom engineering quote to put these walls outside then please get in touch.