

fall protection only

## **ALT'O**

REF. NUS130



# FULL BODY AND RESCUE HARNESS WITH INTEGRATED BELT



**REGULATION** 

2016 / 425

**CERTIFICATION** 

EN 361:2002 EN 358:2018 EN 1497:2007 EN 813:2008





## **COMFORT / ACCESSORIES**



BACK PAD WITH BREATHABLE 3D FABRIC



LARGE LEGS AND POSITIONING BELT WITH BREATHABLE 3D FABRIC



AUTOMATIC ALUMINUM BUCKLES WITH LOCKING INDICATOR



TOOL HOLDERS(X2) + LARGE TEXTILE STRINGS FOR TOOL HOLDING (X3)



REMOVABLE LANYARD HOLDER

## **ATTACHMENT POINTS**



FRONT FALL ARREST ATTACHMENT POINT WITH ALUMINUM D RING



BACK FALL ARREST ATTACHMENT POINT WITH ALUMINUM D RING



VENTRAL SUSPENSION ATTACHMENT POINT BY ALUMINUM D RING



LATERAL ATTACHMENT POINTS WITH ALUMINUM D RING FOR WORK POSITIONING

## **OPTION**



INCLUDED ASCENDER ADJUSTER REF. NUS131A + OPTIONAL VENTRAL ASCENDER REF. NBLOCK



## TECHNICAL SPECIFICATIONS

- Water repellent webbing in polyester 44 mm (R ≥ 25 kN)
- Adjustment of shoulder straps, belt and leg straps height through quick buckles
- Back, front, suspension and work positioning D ring in anodised forged aluminium
- Large legs with breathable 3D fabric and automatic alu buckle
- Large positioning belt with breathable 3D fabric, adjustable on height with 3 large textile strings for tool holding and 2 plastic D ring
- Back pad with breathable 3D fabric to facilitate the donning of the harness and increase the comfort of the user
- Static resistance ≥ 15kN
- Weight: 2,2 kg

#### Removable accessories included:

- Removable ascender adjuster (Ref.: NUS131A).
- Universal lanyard holder (Ref.: NPORTL).

#### **Available accessories:**

- ALT'O removable seat (Ref.: NUS132).
- · Ventral ascender (Ref.: NBLOCK).

### **USE**

Full body harness and rescue harness with intended to rope access and works on pylons.


### **DESCRIPTION**

**ALT'O** is a versatile high comfort with a modern design. Its resistant light alloy components makes it a safe and lightweight.

Its design allows fast and easy adjustment and its ergonomy is adapted to any working conditions.

The shoulder straps are widely spaced to limit neck shafing.

## **SIZES**

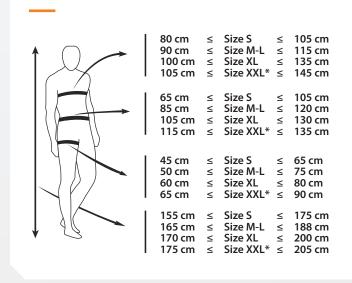

## **REFERENCES**

