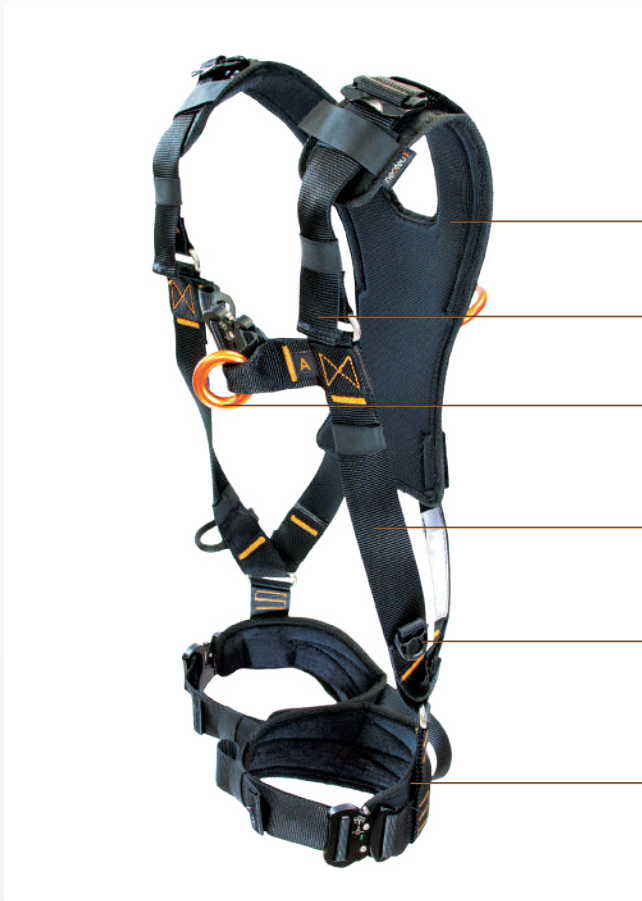


CERTIFICATION : EN 361 : 2002 / EN 1497 : 2007 / REGULATION : 2016 / 425

Ergonomic and  
high density back padShoulder straps adjustment  
pulling downwards

Aluminum front O ring

Water repellent webbing  
with fall indicator

Tool holders

Padded leg straps with  
adjustment through  
automatic bucklesOrange coated back  
D ringAutomatic aluminum buc-  
kles with locking indicator

Activated fall indicator

Water repellent  
webbing

## TECHNICAL SPECIFICATIONS

- Tested to 140 kg
  - Water repellent webbing in polyester 44 mm (R $\geq$ 25 kN)
  - Shoulder straps adjustment pulling downwards with steel black epoxy coated quick buckles male/female
  - Chest strap 44 mm with automatic front buckle
  - Drop indicator showing at 300 daN
  - Comfort pads on legs
  - Static resistance  $\geq$  15 kN
  - Weight : 1,2 kg
- Standard models :
- Without back pad Réf. NUS77A
  - With back pad Réf NUS77AP

Other models available on request :

- Back extension strap of 300 mm Réf. NUS77AEX
- Back pad + back extension strap Réf. NUS77AEXP

## USE

Full body harness to use in case of fall hazard. Intended to maintenance works in industry and the construction area.

## DESCRIPTION

Full body harness VIT'O comfortable lightweight and safe, fits most of the bodies thanks to its high performance adjusting and locking systems.

TAILLE / SIZE	80 cm $\leq$ Size S $\leq$ 105 cm 90 cm $\leq$ Size M-L $\leq$ 115 cm 100 cm $\leq$ Size XL $\leq$ 135 cm
65 cm $\leq$ Size S $\leq$ 105 cm 85 cm $\leq$ Size M-L $\leq$ 120 cm 105 cm $\leq$ Size XL $\leq$ 135 cm	
45 cm $\leq$ Size S $\leq$ 65 cm 50 cm $\leq$ Size M-L $\leq$ 75 cm 60 cm $\leq$ Size XL $\leq$ 80 cm	
155 cm $\leq$ Size S $\leq$ 175 cm 165 cm $\leq$ Size M-L $\leq$ 188 cm 170 cm $\leq$ Size XL $\leq$ 200 cm	