

## Technical data model CPA


Model	EAN-No. 4025092*	Capacity in kg/ number of chain falls	Chain dimensions d x p mm	Classification  FEM/ISO	Lifting speed with rated load <sup>1</sup> m/min	Lifting speed without load <sup>1</sup> m/min	Lowering speed with rated load <sup>1</sup> m/min	Air consump- tion with rated load <sup>1</sup> m <sup>3</sup> /min	Hoist motor  kW	Weight at standard lift (3m) kg
<b>CPA 1-13</b>	*911795	125/1	4x12.2	1 Am/M4	13.1	17.1	11.3	0.9	0.4	15.4
<b>CPA 2-10</b>	*911788	250/1	4x12.2	1 Am/M4	9.8	17.1	13.7	0.9	0.4	15.4
<b>CPA 2-31</b>	*911801	250/1	6.3x19.5	1 Bm/M3	31.0	52.0	36.0	2.1	1.33	21.8
<b>CPA 5-5</b>	*911818	500/2	4x12.2	1 Am/M4	4.6	7.9	6.7	0.9	0.4	17.2

<sup>1</sup> Values for 6.3bar (flow pressure) and 2m control drop. Speeds will be reduced in case of longer control length.


Model CPA 1-13, CPA 2-10 and CPA 5-5 hose length max. 12m, air supply 3/8" NPT  
 Model CPA 2-31, CPA 5-17 and CPA 10-9 hose length max. 20m, air supply 1/2" NPT.

## Dimensions model CPA

Model	CPA 1-13	CPA 2-10	CPA 2-31	CPA 5-5	CPA 5-17	CPA 10-9
A, mm	292	292	457	324	457	457
A1, mm	410	410	483	410	483	508
B, mm	21	21	25	14	25	27
C, mm	20	20	24	24	24	28
D, mm	16	16	26	14	26	28
F1, mm	90	90	130	90	130	130
F2, mm	120	120	180	120	180	180
K, mm	103	103	146	103	146	165
L, mm	57	57	102	57	102	83
M, mm	120	120	114	120	114	135
N, mm	50	50	54	50	54	25
Q1, mm	142	142	162	142	162	162
Q2, mm	183	183	181	183	181	181

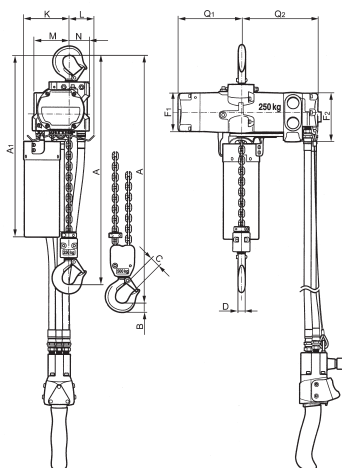

Model CPA 1-13/2-10/5-5

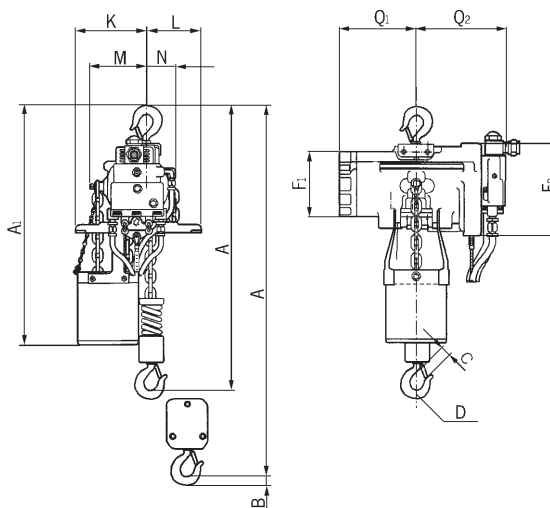

Model CPA 2-31/5-17/10-9