



WICKED BRICK

PLEASE NOTE:

All acrylic parts have protective film applied on both sides.

Some pieces appear with slightly translucent film, this will need to be removed before assembly.

Ensure all engraved lines face outwards.



INSTRUCTIONS FOR: LEGO® Minifigure display case

LDS902.3.5 and LDS902.5.5



- 1* - Base
- 2* - Add-on
- 3* - Front panel
- 4* - Back panel
- 5* - Backplate
- 6* - Shelf
- 7* - Lid
- 8 - Left panel
- 9 - Right panel
- 10 - Screws & cubes

*While the process remains the same, some parts found in LDS902.3.5 and LDS902.5.5 are different widths, therefore requiring additional screws. LDS902.3.5 requires x13 cubes and screws. LDS902.5.5 requires x16 cubes and screw.

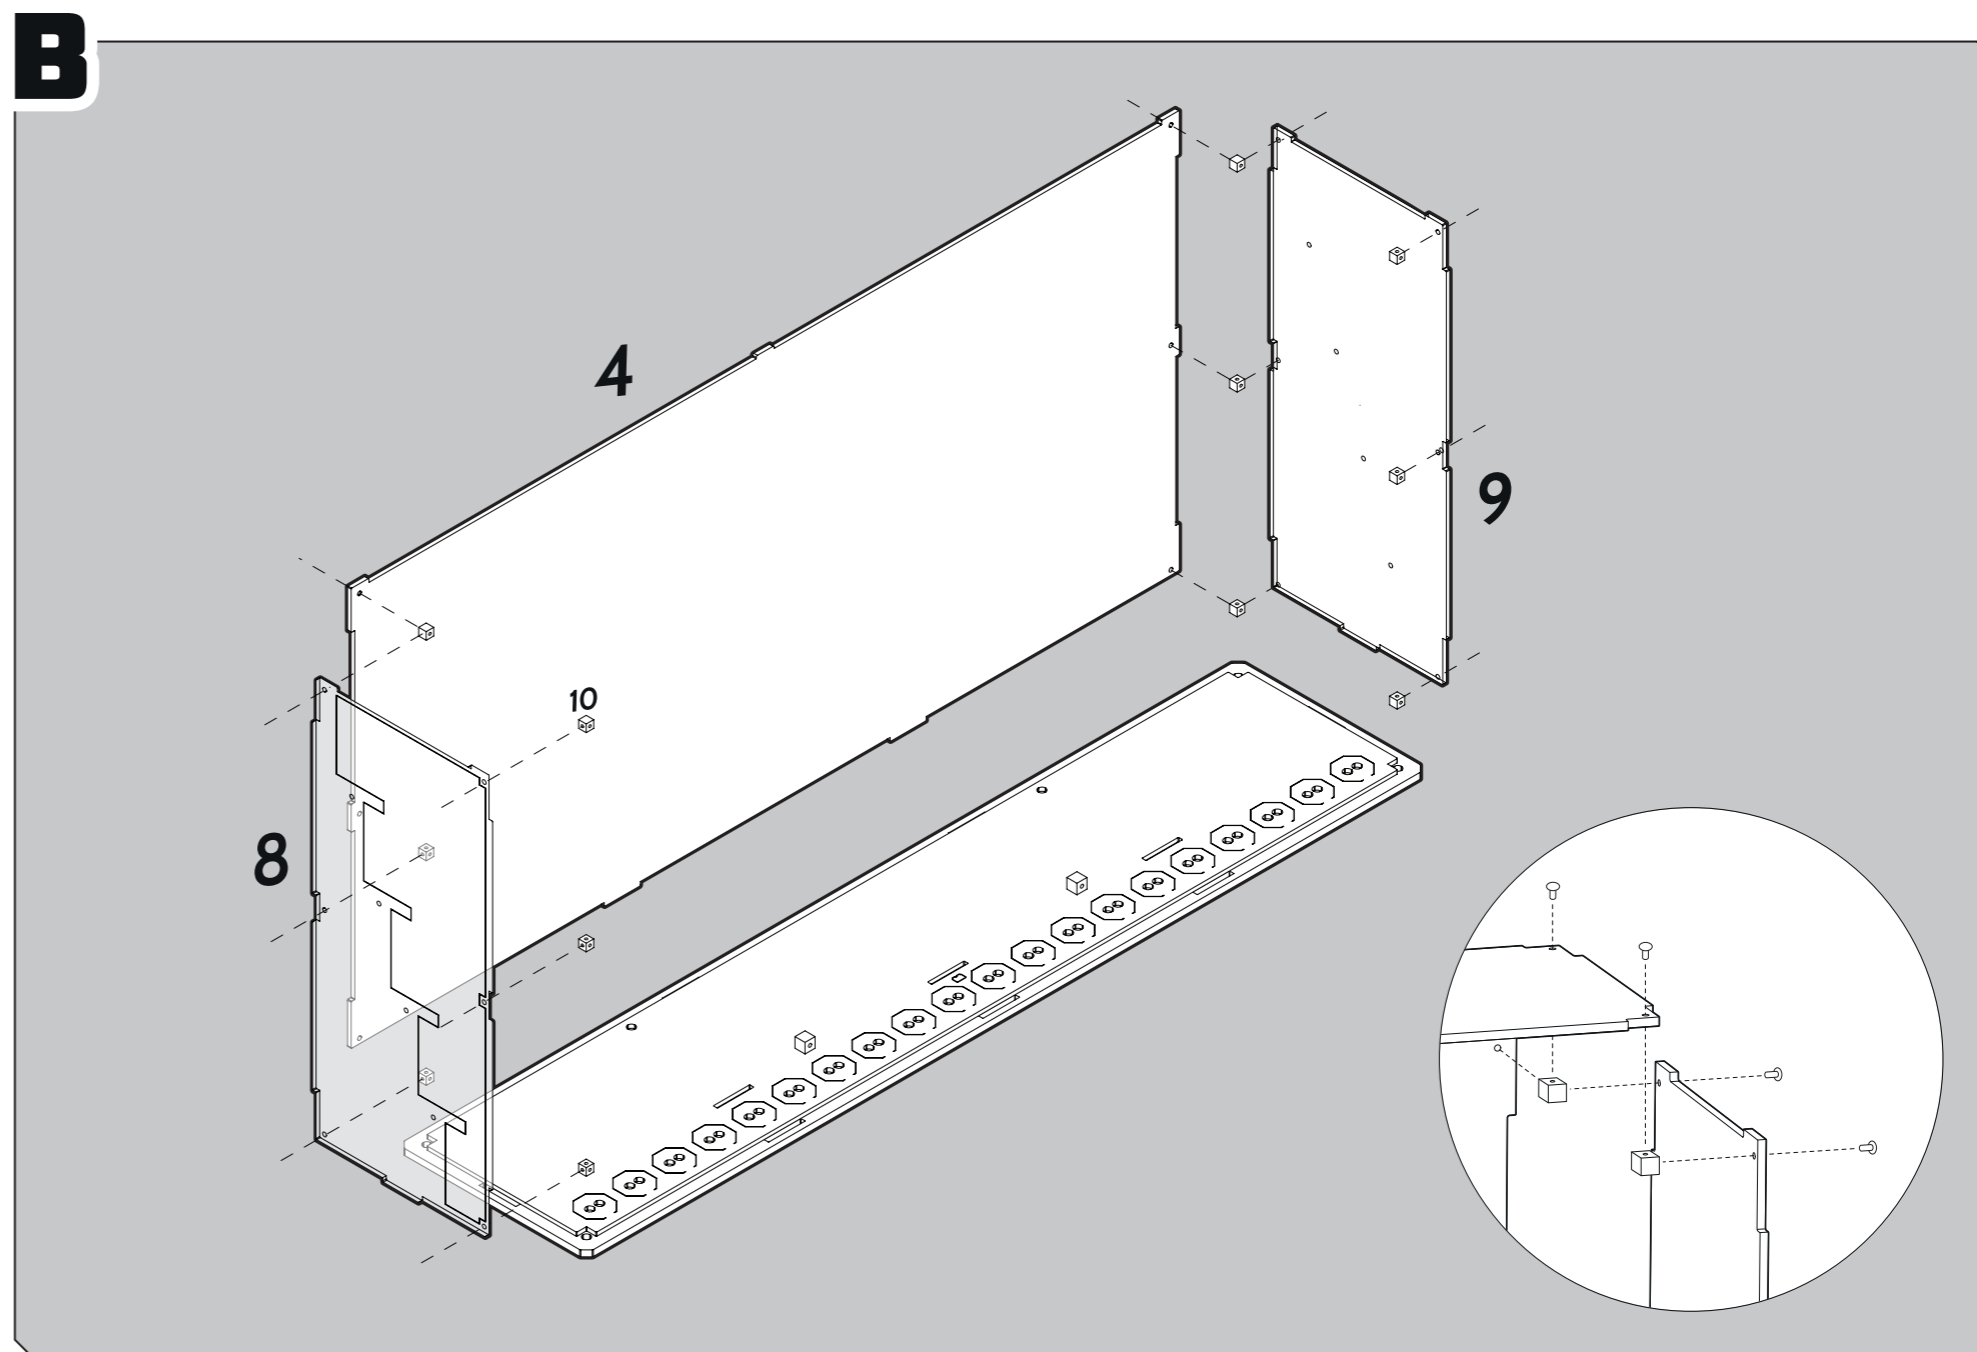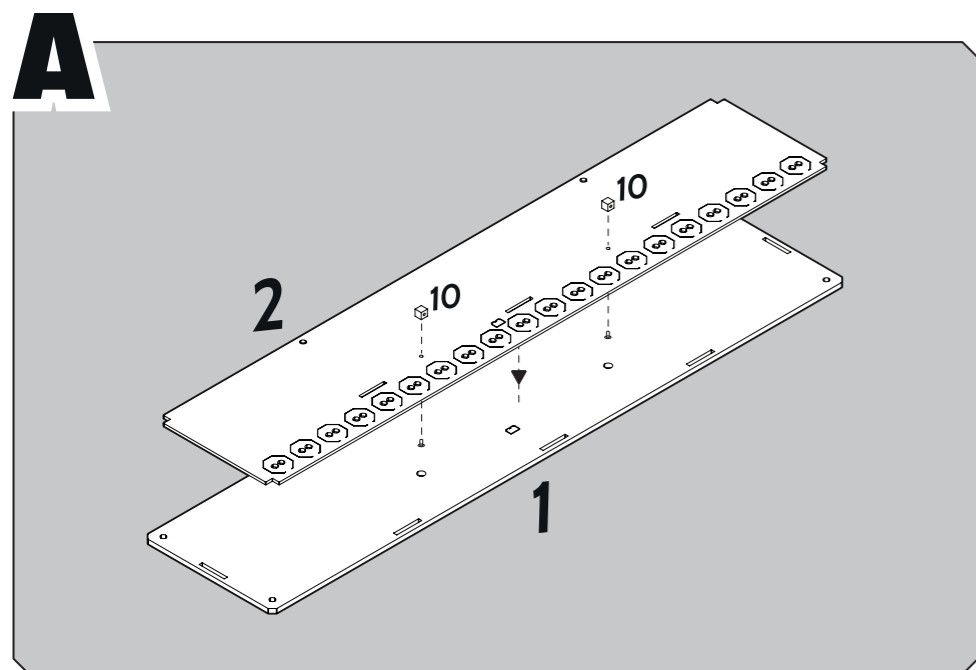



**WICKED
BRICK**

PLEASE NOTE:

All acrylic parts have protective film applied on both sides.

Some pieces appear with slightly translucent film, this will need to be removed before assembly.

Ensure all engraved lines face outwards.

INSTRUCTIONS FOR: LEGO® Minifigure display case

LDS902.3.5 and LDS902.5.5



- 1* - Base
- 2* - Add-on
- 3* - Front panel
- 4* - Back panel
- 5* - Backplate
- 6* - Shelf
- 7* - Lid
- 8 - Left panel
- 9 - Right panel
- 10 - Screws & cubes

*While the process remains the same, some parts found in LDS902.3.5 and LDS902.5.5 are different widths, therefore requiring additional screws. LDS902.3.5 requires x13 cubes and screws. LDS902.5.5 requires x16 cubes and screw.

C

Attach one part 5 to the cubes on the add-on. Once complete, follow the illustration above for all shelves and once built, screw parts loosely into parts 8 & 9.

D

Once all the shelves are attached, tighten the screws on the side panels to secure the shelves in position.



WICKED BRICK

PLEASE NOTE:

All acrylic parts have protective film applied on both sides.

Some pieces appear with slightly translucent film, this will need to be removed before assembly.

Ensure all engraved lines face outwards.



INSTRUCTIONS FOR: LEGO® Minifigure display case

LDS902.3.5 and LDS902.5.5



- 1* - Base
- 2* - Add-on
- 3* - Front panel
- 4* - Back panel
- 5* - Backplate
- 6* - Shelf
- 7* - Lid
- 8 - Left panel
- 9 - Right panel
- 10 - Screws & cubes

*While the process remains the same, some parts found in LDS902.3.5 and LDS902.5.5 are different widths, therefore requiring additional screws. LDS902.3.5 requires x13 cubes and screws. LDS902.5.5 requires x16 cubes and screw.

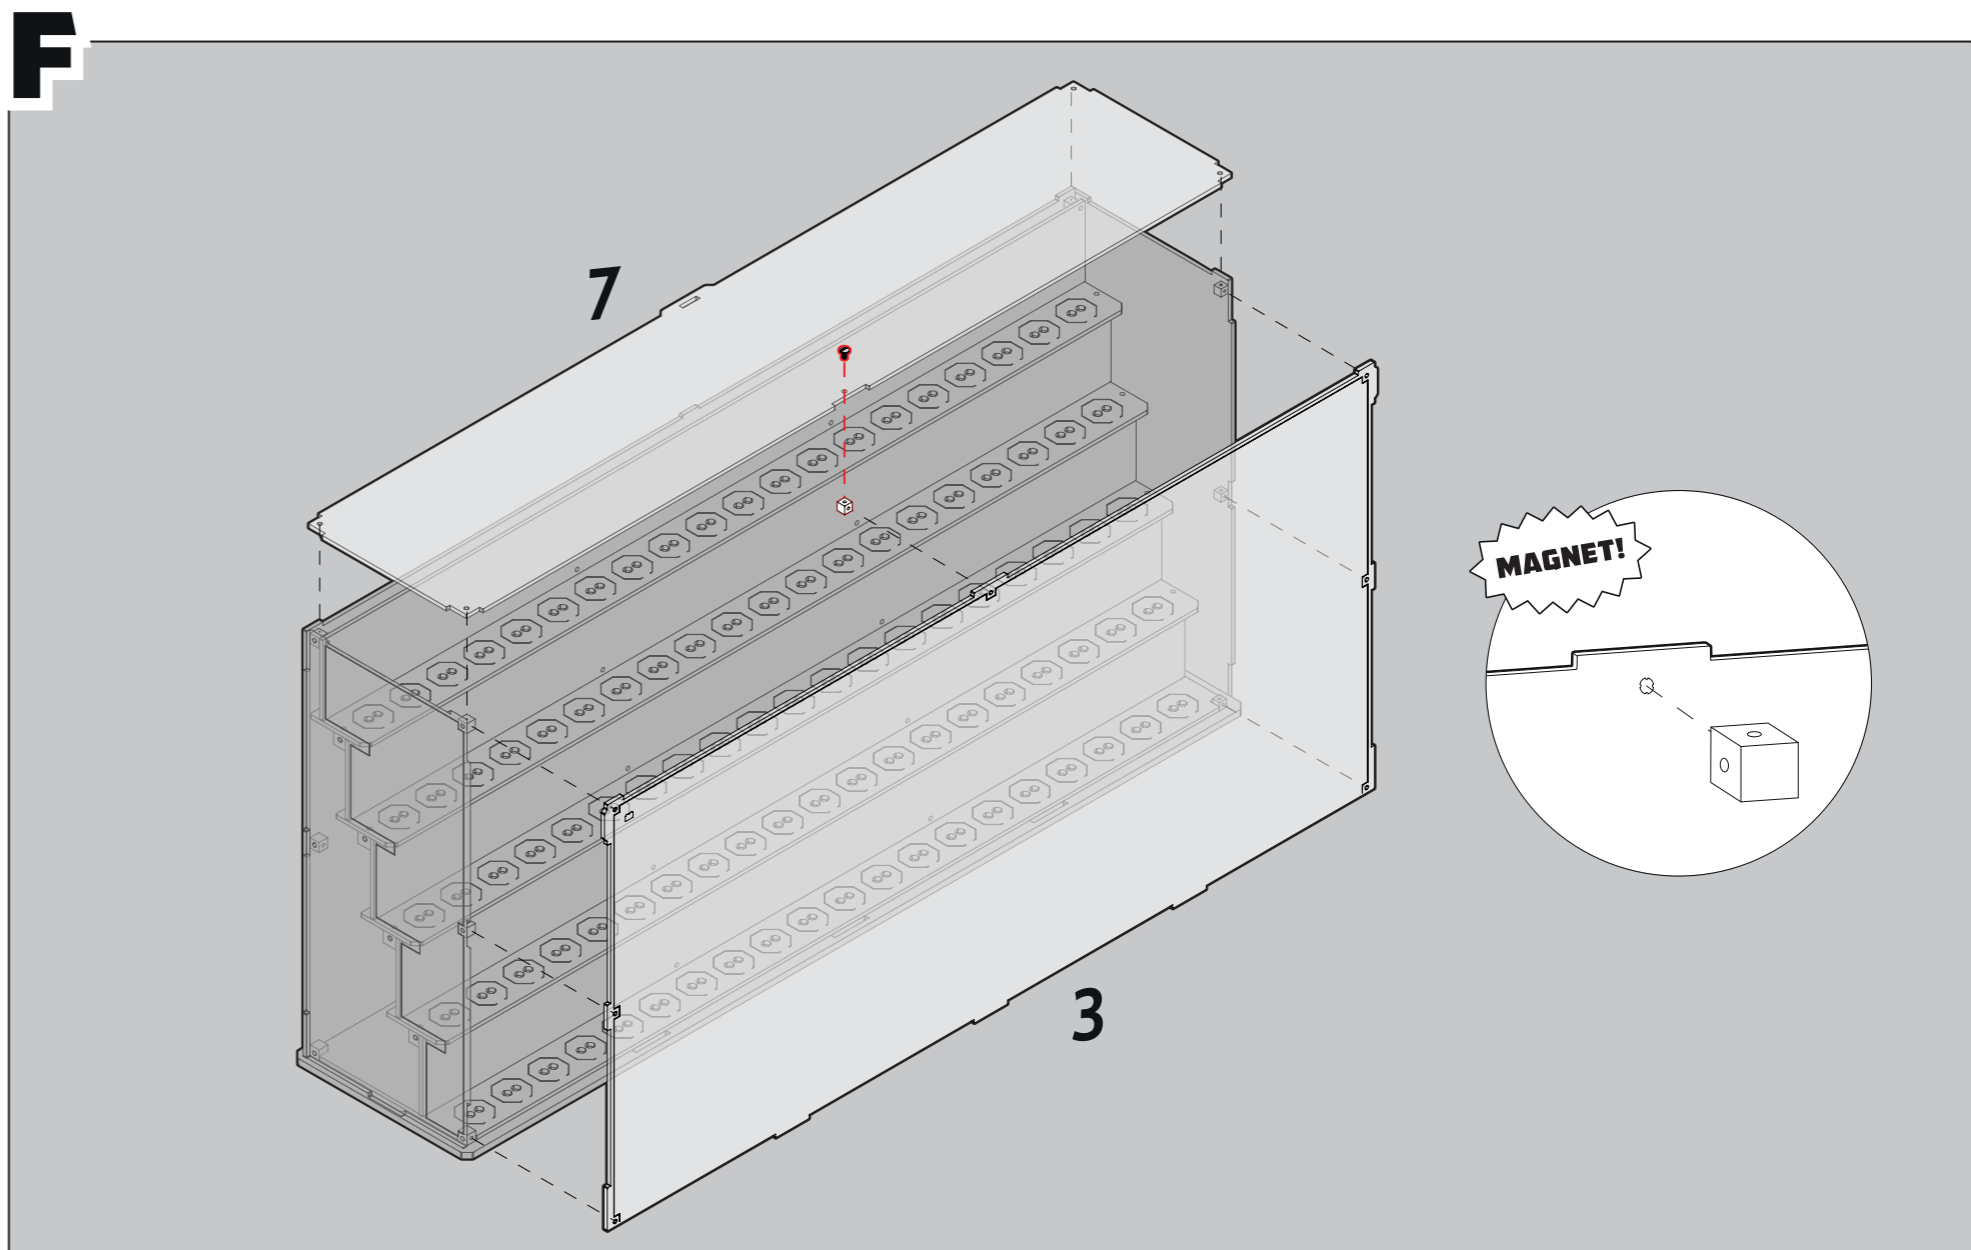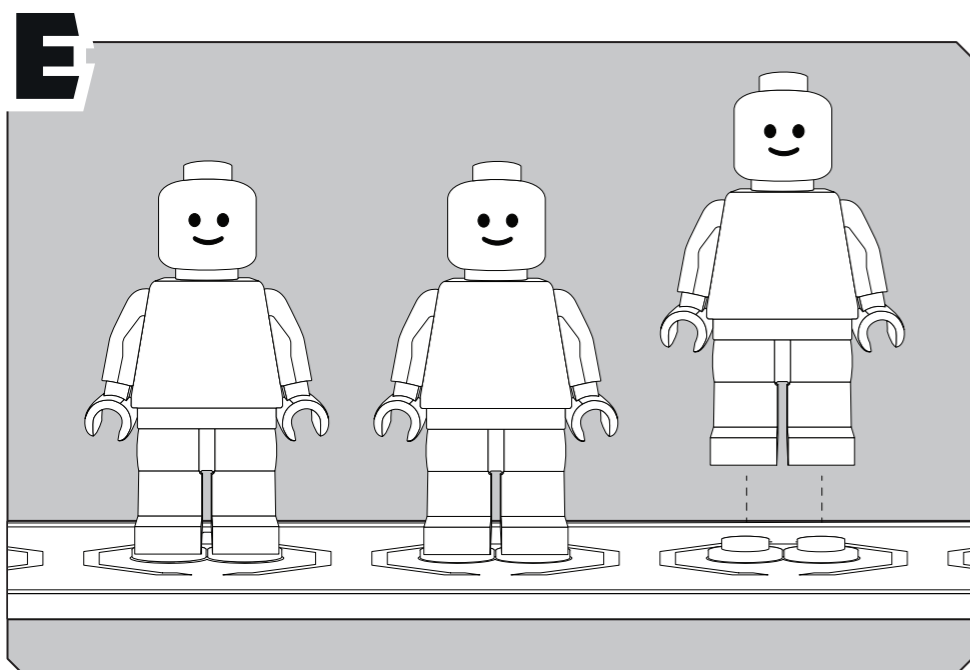

Attach part 3 onto the front of the case before attaching part 7. The areas highlighted in red require screws when connecting the cubes. The remaining cubes are connected via magnets already in parts 3 & 7.