




### Features

- Used for Residential, Commercial and Industrial applications
- Used to switch any load On or Off
- This device is controllable from the WiFi Bridge (QS-WIFI-BRIDGE) remotely
  - Set schedules
  - Turn on / off devices
  - Device Status

### Wiring Diagram

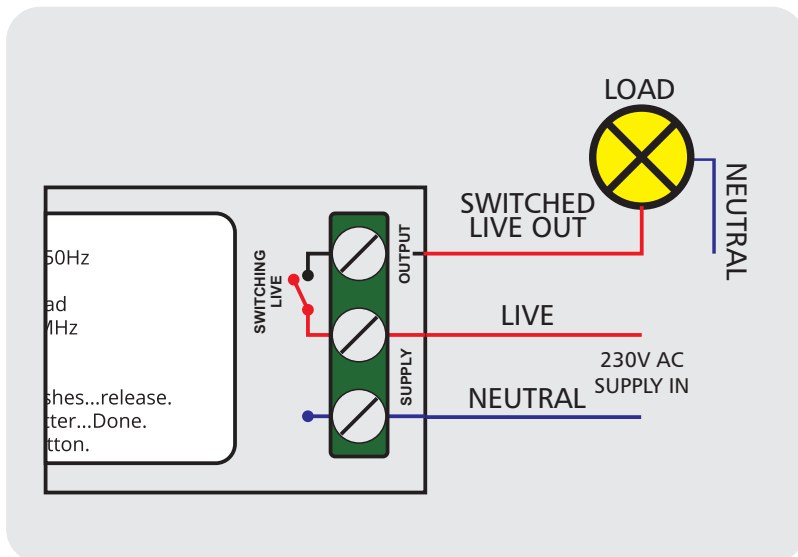

### LOAD TYPES

Resistive: Edison Bulb

Inductive: Motor

Capacitive: Pool pump

*for inductive or capacitive loads,  
please use the 30A Relay (QS-R-S30)*

### Specifications

- Input supply - 220Vac, 50Hz
- Output - 220 Vac, 50Hz
- Load - 5Kw Resistive load (30A) or 1 Kw Inductive load (Motor) 1.5hp
- Form factor - enclosed housing - 25mm (h) x 40mm (W) x 123mm (L)
- IP52
- Radio frequency - 868MHz
- Range - 30m through walls and floors, 100m line of sight. Repeaters (QS-T-REP) available if needed