


## Features


- Great for stairwells, garage, kitchens & bathrooms
- Internal light level sensor to only work when there is not enough ambient light to save power. (5 light settings)
- Time delay settings available: 30 sec, 1 min, 5min, 10min, 20min and 30min.



Top View

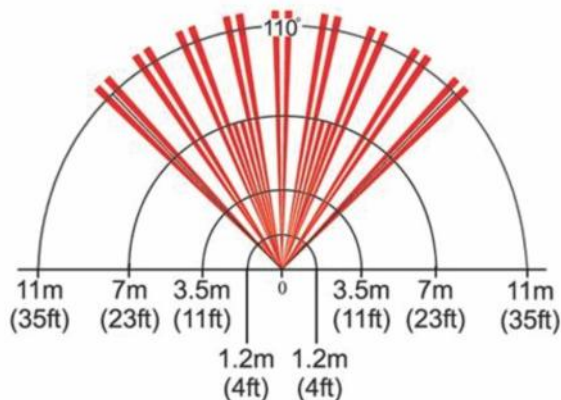

Side View

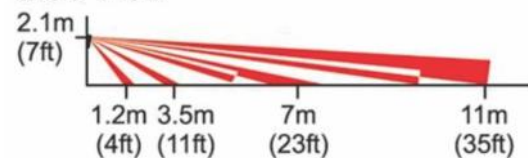

## Specifications

- Input supply - 2 x AAA Batteries (Up to 2 years battery life)
- Form Factor - Enclosed casing - 60mm (L) x 65mm (W) x 40mm (H)
- Horizontal beam spread - 110 degrees (10m)
- Vertical beam spread from an installation height of 2.1 m - 10m
- Internal light level sensor
- Ip55
- Radio Frequency - 868 Mhz
- Range - 30m through walls and floors, 100m line of sight. Repeaters (QS-T-REP) available if needed.