



NOV'SIGHT

12V G5 MULTI-FUNCTION INFLATABLE BLOWER STARTING POWER SUPPLY

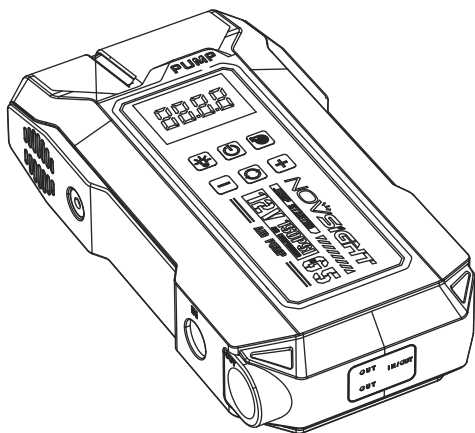

User Manual | Bedienungsanleitung
Manuel d'utilisation | Manuale d'uso
Manual del usuario | 日本語の説明書

> PRODUCT FUNCTIONS DESCRIPTION

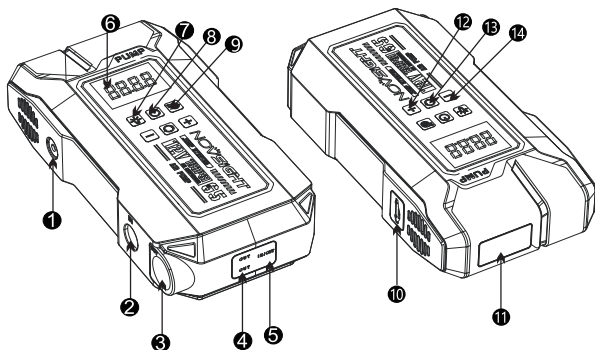

- ① Inflatable Port
- ② Inhalation Port
- ③ Inflatable Socket
- ④ USB Output
- ⑤ TYPE-C Input
- ⑥ LED Display
- ⑦ Lighting Switch
- ⑧ Power/Air Pump Start Key
- ⑨ Blowing Start Button
- ⑩ 12V Start Output
- ⑪ LED Light (Lighting/Strobe /SOS)
- ⑫ +Plus Key
- ⑬ Setting Key
- ⑭ - Plus key

> TECHNICAL SPECIFICATIONS

- ▶ Product Model: G5
- ▶ Product Size: 230*118*55mm
- ▶ USB Output1: 5V/2A
- ▶ USB Output1: 5V/2A
- ▶ Input: 5V/2A Max 9V/2A
- ▶ LED Lighting:
(White Lights/White Light Flashing Slowly/White Light Flashing Fast)
- ▶ Maximum Pressure: 150PSI

> CONTENTS

- ▶ Jump Starter X1
- ▶ 1 in 1 Mobile Cable X1
- ▶ Jump Cable X1
- ▶ User Manual X1
- ▶ Inflatable Tube X1
- ▶ Inflatable Nozzle X4
- ▶ Blower Tube X1
- ▶ Blower Nozzle X5

Details are subect to delivery.


> OPERATING INSTRUCTIONS

How to Charge this Product?


1. Select the original power adapter and connect its connector to the corresponding input port of this product;
2. Connect the power adapter to the 220V power strip port and the digital display battery indicator light. Starting to flash indicates charging in place.



Starting A Car with The Jump Starter




1. Connect the jump cables to the jump starter by plugging the connector into the jump starter socket. Make sure the plug is firmly inserted into the jump starter.



2. Connect the red clamp to the positive (+) terminal and connect the black clamp to the negative (-) terminal. Make sure the battery clamps make good and clean contact with the battery terminals.



3. Start the car.



4. Once the car has started, remove the jumper cables from the battery within 30 seconds (failure to do so may damage the jump starter) and leave the engine running.


How to Charge Digital Devices?

1. Select the original charging cable of the digital product, connect one end to the digital product and the other end to the output port, and then turn on the USB switch;
2. Check if the power of the electrical equipment matches the output power of this product: Press the AC switch to turn on the 220V power supply, the indicator light will be on, and check the power consumption. Power supply for equipment; The display screen will show the current battery level.


Low battery Alarm

When the battery level is approximately below 10%, a low voltage alarm will enter, and the display screen light will start flashing. When charging the device, it will flash until it runs out of battery. When there is no device charging, it will flash for about 5 seconds and then turn off.

> OPERATING INSTRUCTIONS

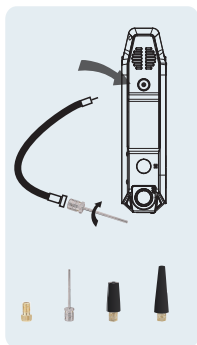

One end of the air pipe is inserted into the outlet of the air pump.



The other end is inserted into the outlet of the tire



Click the "ON" key to switch the inflation mode; Long press the "ON" key to switch units. Press (+) or (-) to adjust the tire pressure.



Pull out both ends of the pipe, the inflation is completed.



Set the values and modes, press the start button to start inflating.

Note:

This product is not suitable for inflating truck tyres.

The suggested air pressure range is for reference purposes only. For precise inflation pressure, please refer to the instruction manual of the item you are inflating.

Illustration	Name
	French standard adapter
	Ball needle
	nozzle for swimming ring 、 small air bed
	nozzle for swimming ring

Category	Recommended air pressure range
Automobile tire	36.0Psi (25.0~50.0 Psi)
Motorcycle tire Electric vehicles tire	35.0Psi (25.0~45.0 Psi)
Bicycle tire	45.0Psi (30.0~65.0 Psi)
Ball	Basketball: 8Psi (4~16Psi)
	Football: 8Psi (4~16Psi)
	Volleyball: 9Psi (7~15Psi)
	Rugbyball: 12Psi (11~16Psi)
Custom	35Psi (1~150 Psi)


> OPERATING INSTRUCTIONS

» LED Lighting

1. Click the LED switch, the lighting will remain on for a long time;
2. Click the LED switch again to activate the red light flashing mode;
3. Click the LED switch again to activate the slow flashing red light mode;
4. Click the LED switch again to turn off the lighting.

» Use of Blower

1. Insert the hose into the air outlet, turn it clockwise slightly, and click on the blower to start Dynamic key, can be used for blowing air and dust;
2. Different uses of orifice tubes: Insert the hose into the suction port and gently twist it clockwise, Can be used for suction; Insert the hose into the blower port and gently twist it clockwise, Can be used for blowing dust with air.

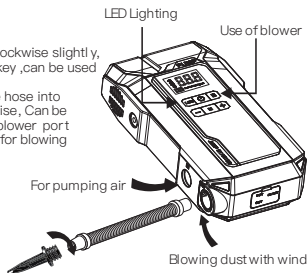

- It takes about 3 hours to charge the jump starter.
- Turn the main power switch to on, tap NO/OFF you can charge you phone and tablet pc.

Name	Illustration	Describe	Name	Illustration	Describe
Trachea		Connect one end to the air nozzle and the other end to the connector	Wide Air nozzle		Suitable for inflatable beds, inflatable pillows, etc.
Connector		Screw the connector into one end of the trachea and connect it to the product's air outlet	Long air nozzle		Suitable for inflatable beds, inflatable pillows, etc.
Funnel Long Air nozzle		Suitable for inflatable toys such as swimming rings.	Mid-air nozzle		Suitable for inflatable boats, inflatable pads, etc

> FREQUENTLY ASKED QUESTIONS

Problem 1: After a few seconds of successful start-up, it automatically turns off or removes the clip to turn off

This situation is generally due to the excessive use of the car battery or serious aging caused, you can try to start again after running for 3 minutes to charge the battery, such as or quickly turn off the battery to prove that the battery has no capacity to store electricity, you must replace the new battery.

Problem 2: Charging is not charged.

1. Check whether the display shows "IN", then "%" flashes, if neither is displayed, please check whether the charger connection is normal.
2. Please check whether the charging cable is correctly connected to the charger and whether there is power on the mains socket; You can try replacing a charger or charging cable and try again (this power supply You can use the phone's charger and cable directly)

Problem 3: Can not charge the phone.

1. Check that the USB output of the boot power supply is turned on, and the power is at least one block or more than 10%.
2. Check that the charging cable is properly connected or damaged, and if necessary, please replace the charging cable and try again.

Problem 4: Can't start the car

The engine is completely in motion at start-up, first check whether the clips are reliably connected, if the battery cable head is dirty or badly rusted, please clean it up and try again. If it is determined that it has been connected, it is possible that the car has entered a protected state, and some models can try to press and hold the start button directly for about 10 seconds, waiting until the engine is moving. The engine moves at start-up, but it does not start: please check whether the clip is reliably connected to the copper head of the battery line, if the negative electrode is attached to the iron shell of the car, it will affect the starting performance.

The above answer if not solve the problem, Please contact customer service to analyze and solve, do not disassemble the machine!

> WARRANTY ACTIVATION!

Activate the exclusive warranty
service provided by the
NOVSIGHT official

Ensuer your purchase is 100%covered.



novsight.com/pages/warranty-registration

Email: service@novsight.com

Registre Online Now!





1. Please keep dry and away from fire.
2. Do not disassemble, puncture, or expose the port to do irregular operations or strong impact on the product.
3. For children or people with limited intelligence, attention should be paid to the use under the protection of the custodian.