



Item# SML1213

Pendant

Fixture Dimension: D24" (610mm), H24.8" (630mm)

Chain/Rod Length: 8.2ft. (2.5m) - Wire Length: 11.5ft. (3.5m)

Fixture Finish: Nickel

Fixture Weight: 19Lbs. (8.6Kg)

Bulbs: 10 x 60W E12 Candelabra Base - NOT INCLUDED

Maximum Wattage: 60W

Voltage: 120V

Approved Location: Dry Location



Assembly Instructions for
Item# SML1213

ATTENTION:

FIXTURE INSTALLATION MUST BE DONE BY LICENSED ELECTRICIAN.

SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER.


USE ONLY THE SPECIFIED BULBS AND DO NOT EXCEED THE MAXIMUM WATTAGE.

BEFORE YOU INSTALL:

1. Check the fixture frame for any physical damage
2. Check all parts and crystals to ensure they are not damaged or missing
3. Test all sockets with a bulb for conductivity before “dressing” the fixture
4. If there is any problem, please do not install the fixture, please contact the vendor and solve the problem first.

Step 1: Install Crossbar


Attach the Crossbar to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws.

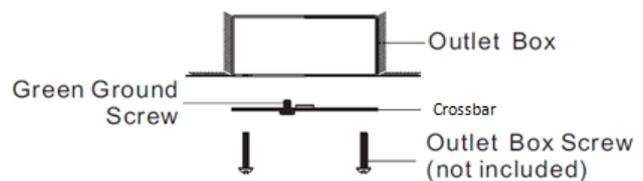

Step 2: Wire Connections

Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into outlet box.

Note: If the electrical wire is going to be cut shorter than provided you will need to identify the "L" line wire and the "N" neutral wire before you cut the excess wire off. One is labelled "N" and the other labelled "L". To do this separate the "L" line wire and the "N" neutral wire as far as you need to. Re-label the wire near where you want to make the cut. Be sure to mark the wire on the side of the fixture and not on the excess wire being cut and removed.

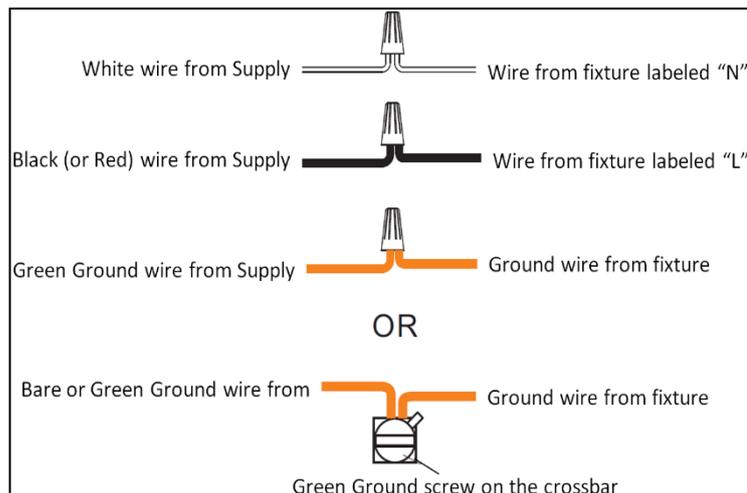

Step 3: Install Bulb

Insert bulb (not included) and screw snugly into place.