5 Year Parts & Lightning Protection Warranty

SURVIVOR® OTR

Flattop Truck Scale - Steel Deck







Optional bolt-on guiderails


STANDARD FEATURES



- Top access to load cells and junction box
- 75,000 lb capacity load cells and G-Force™ mount assemblies
- Junction box(es) appropriate for number of load cells utilized
- NTEP Certified, CC #02-003A1
- 90,000 lb Concentrated Load Capacity (CLC)
- 90,000 lb Dual Tandem Axle (DTA)
- Up to 270,000 lb full scale capacity
- Span deflection ratio (1:1100) for legal highway loads
- Three standard widths: 10ft, 11ft, and 12ft (available up to 14ft, NTEP Certified)

Package includes: Assembled weighbridge modules and weighbridge fasteners; load cells with conduit fitting; load cell mounts with leveling bolts and anchor bolts; copper transient bypass cables at each load cell; metal conduit on weighbridge for load cell cable runs; flexible plastic conduit from load cell to metal conduit; conduit fittings from plastic to metal conduit; FRP junction box(es): homerun cable to indicator (60ft long) and print packages including foundation drawing (pier, floating slab or pit) and installation manual.

Package does not include: Approach coping; foundation alignment posts; rebar and mesh for foundation; indicator; printer; freight charges including material handling; shipping charges, transportation permits and fees, escort(s) charge, and insurance transportation fees.

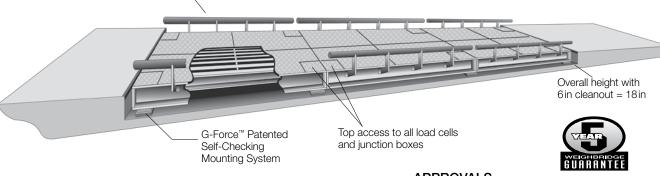

APPROVALS



SURVIVOR Durable performance measured not in years, but decades.

SPECIFICATIONS

LOAD CELLS AND MOUNT ASSEMBLIES:

75,000 lb capacity; G-Force™ Patented Self-Checking Mounting System, top access to load cells

FULL SCALE CAPACITY:

Up to 270,000 lb

DEFLECTION FACTOR:

CONCENTRATED LOAD CAPACITY (CLC):

90,000lb

DUAL TANDEM AXLE (DTA):

90.000lb

APPROVALS:

NTEP Certified per H-44, Class IIIL, CC #02-003A1

WARRANTY:

Five-year limited warranty on the weighbridge Five-year parts warranty, including lightning protection (please refer to Warranty Statement on page HC-16)

Five-year lightning extended warranty (see page HC-16)

DUE TO THE VARIETY OF CONFIGURATIONS, PLEASE CONSULT THE FACTORY TO DISCUSS APPLICATION REQUIREMENTS AND FOR COMPLETE SPECIFICATIONS AND PRICE QUOTATIONS.