

Manual
72102 NFC
NFC



Connection





Technical data

Supply voltages 230 V, 50/60 Hz
 Switching capacity 16 A / 250 V~ at cosφ=1
 Contact material AgSnO₂
 Type of protection IP 20
 Ambient temperature -30T55
 Mode of operation 1 BSTU
 Degree of contamination 2
 Rated surge voltage 4 kV
 Standard DIN EN 60730-1 / DIN EN 60730-2-7

LED (230V) 200W LED (230V) 200W




Battery

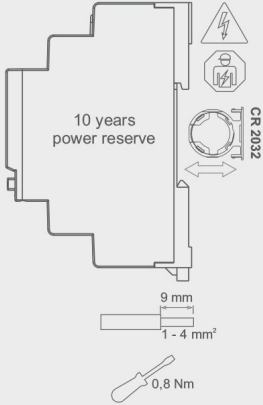


Programmable via NFC on android with Sangamo Connect App Google Play

WARNING:
 * The installation and assembly of electrical equipment must be only carried out only by a skilled Person!
 ** Otherwise fire danger or danger of an electric shock exists!
 *** Disconnect the mains power supply prior to installation and/or disassembly!
 **** Connect the supply voltage/frequency as stated on the product!

Sangamo Limited
 Industrial Estate, Port Glasgow,
 Renfrewshire, PA14 5XG
 Tel: 01475 745131
 Fax: 01475 600370
 Email: enquiries@sangamo.co.uk
 Web: www.sangamo.co.uk

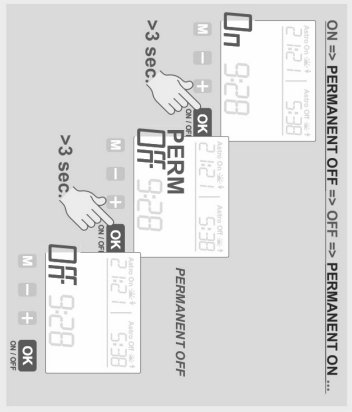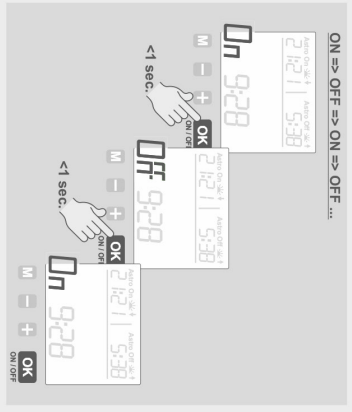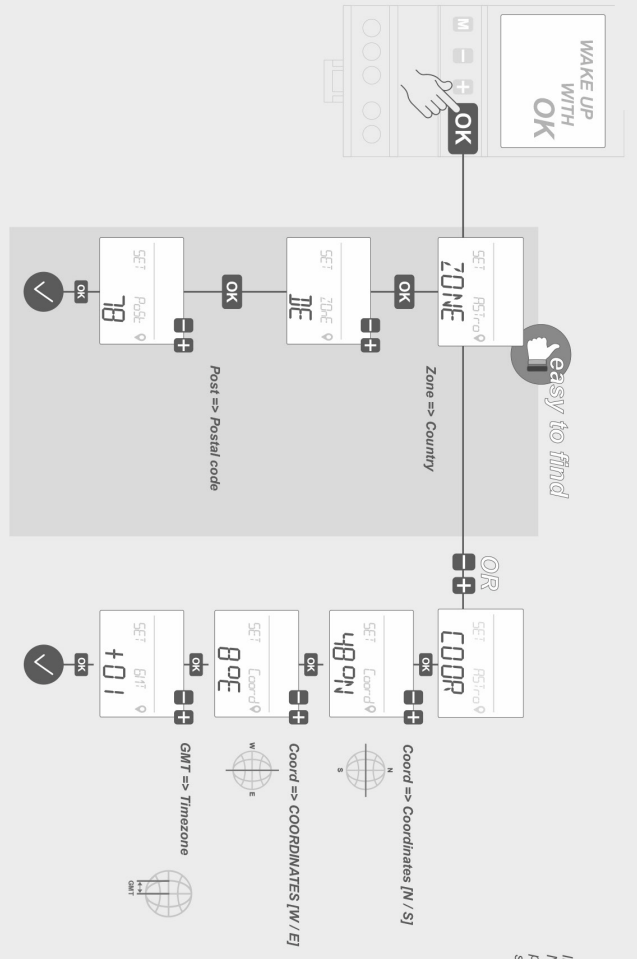

Manual switching

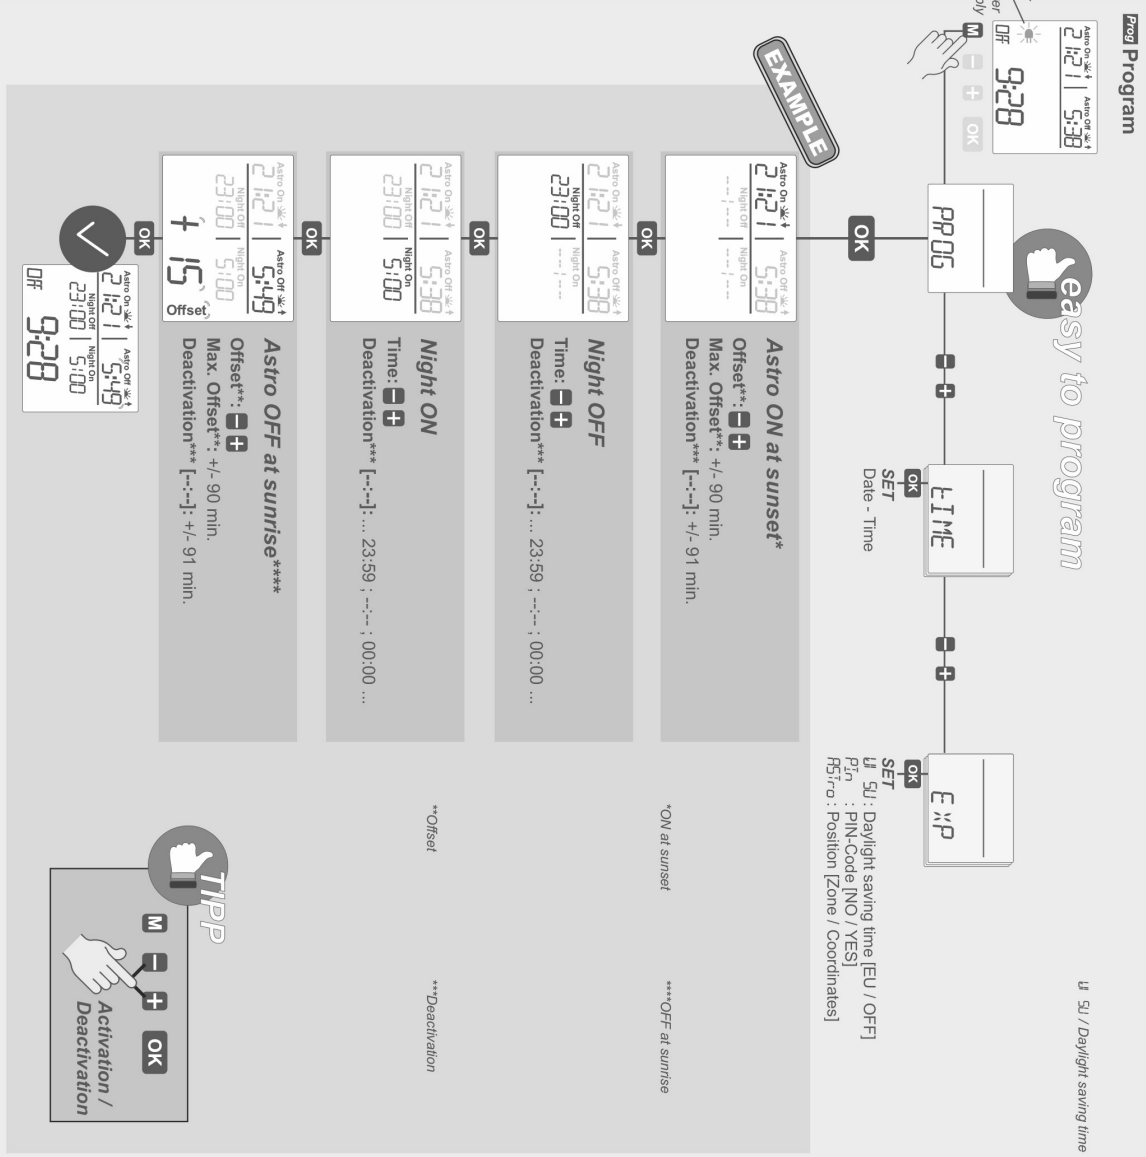

TIPP

M - + OK
 Activation / Deactivation