


# RSNAV ANDROID SYSTEM BASIC DIAGRAM



TF CARD  
RST&MIC

\* TF CARD SLOT IS LOCATED IN THE BACK SIDE OF THE DEVICES IN SOME MODELS.

\* IN SOME MODELS, MIC MAY BE EXTERNAL.

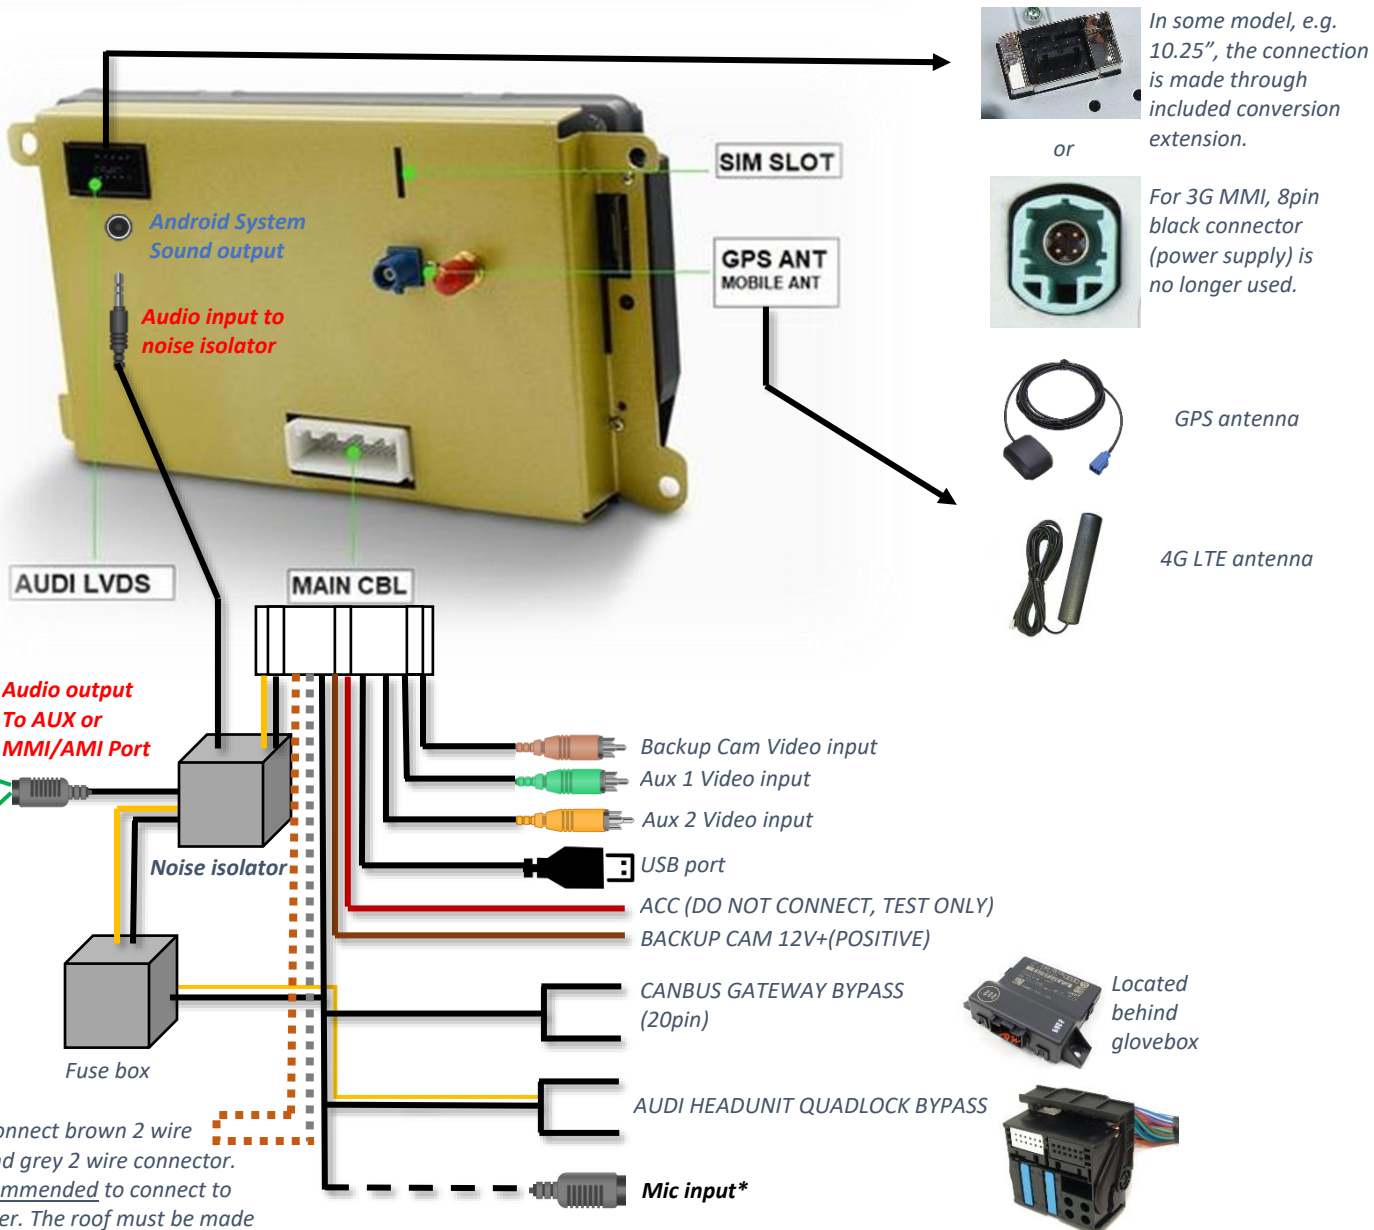

MMI only: Connect brown 2 wire connector and grey 2 wire connector. It is not recommended to connect to centre speaker. The roof must be made

Only for RHD and A3, Q3 model

Q3 Wiring Diagram



- 1. Main Cable
- 2. 4G Antenna
- 3. GPS Antenna
- 4. SIM Card Slot
- 5. LVDS Plug
- 6. 3.5mm Audio Output
- 7. Mic Plug

- 8. ACC (Do not connect)
- 9. AUX Video Input 2
- 10. No Use
- 11. AUX Video Input 1
- 12. Rear Cam Video Input
- 13. USB Port
- 14. Parking sensor connection  
(connect to rear parking  
sensor controller if equipped)

- 15. Rear Cam 12V+
- 16. Canbus Gateway Bypass
- 17. Canbus Receptacle
- 18. Receptacle for Bypass
- 19. To the Audi Headunit
- 20. Audio Output to AML or  
AUX Port



Must plug in this mic to activate the sound system