

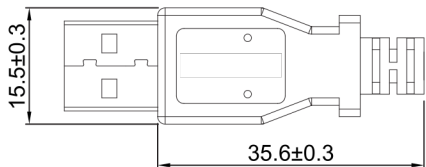
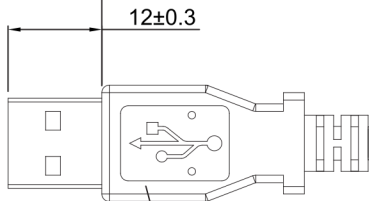




P1



1

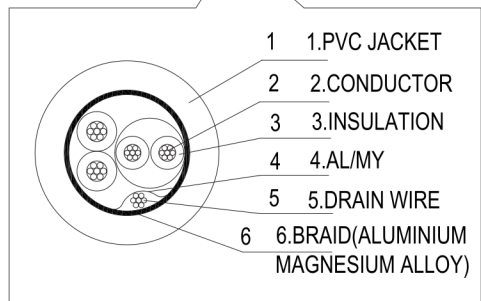

4 3
5 6



P2

PINOUT:

PAIR	P1	COLOR	P2
1	2	WHITE	2
	3	GREEN	3
	1	RED	1
	4	BLACK	4
	SHELL	DR+BR	SHELL

SPEC

- CABLE: UL 2725 28AWG*1P+24AWG*2C+ADB (MAGNALIUM) JACKET BLACK IN COLOR OD:4.4MM
- CONNECTOR:USB"A" TYPE 4PIN MALE SHELL NICKEL PLATED
- CONNECTOR:USB"A" TYPE 4PIN FEMALE SHELL NICKEL PLATED
- MOLDING PVC BLACK IN COLOR
- NUT:4-40UNC 4.75x6.5mm
- SCREW:4-40UNC L=6.5mm

LENGTH(xx)

33±0.3

11.2±0.3

12±0.3

7.8±0.3


30±0.3

15.5±0.3

35.6±0.3

38±0.5

THIRD ANGLE PROJECTION



GENERAL NOTES

DIMENSIONS ARE IN MM - DO NOT SCALE

PRODUCT ID

DESCRIPTION

Panel Mount USB Cable A to A - F/M

DO NOT SCALE

SHEET: 1 OF: 1

UPLOAD DATE: 11/10/2020