



# ASLAN-W1019C

Fanless 18.5" Wide-Screen Industrial Panel PC with 11<sup>th</sup> Gen. Intel® Core™ i Processor




## Features


- 18.5" LCD Display w/ LED Backlight
- Flat panel with PCAP touch screen
- IP65 compliant front panel
- Anti-scratch surface: 7H hardness
- Serial Ports (RS-232/422/485), RS-485 w/ auto-flow control
- Mini PCIe expansion slot support
- 4 x SMA antenna holes for optional wireless function
- Wide power input range(9~36 VDC) & wide operating temperature(-20°C ~ 55°C)
- Fanless cooling system

<b>System</b>	
CPU	Soldered onboard Intel® 11 <sup>th</sup> Gen Core™ i5-1145G7E Processor 1.50 GHz
Memory	2 x 260-pin DDR4 SO-DIMM sockets, supporting 3200MHz SDRAM up to 64GB (1 x 4GB DDR4 SO-DIMM pre-installed)
LAN Chipset	1 x Intel® i225/ i226LM PCIe controller w/ iAMT 2 x Intel® i210 / i211AT PCIe controller
Watchdog Timer	1~255 levels reset
TPM	Support TPM 2.0
<b>Storage</b>	
Type	1 x 2.5" drive bay (SATA III) 1 x M.2 M-Key 2242/2280 slot (PCIe Gen III x4 + SATA III)
<b>Audio</b>	
Type	1 x Mic-in / 1 x Line out 2 x 1.5W speakers (optional)
<b>LCD Display</b>	
Size/Type	18.5" TFT LCD panel
Max. Resolution	1366 x 768, WXGA
Max. Colors	16.7M
Luminance	450 cd/m <sup>2</sup>
Touch Screen	Projected capacitive touch panel
View Angle (U/D/R/L)	80°/80°/85°/85°
<b>Power System</b>	
Power Input	9~36 VDC (3-pin terminal block: V+, V-, GND)
Remote Control	1 x 3-pin terminal block
Button	1 x power button 1 x reset button
Power Consumption	Max. 120W (w/o I/O cards)
<b>Qualification</b>	
Certification	CE, FCC Class A
<b>OS Support</b>	
Windows 10 / Windows 11 / Linux: Ubuntu 20.04	

<b>Expansion</b>	
1 x mPCIe (PCIe x1 + USB2.0, Full Size) w/ 1 x nano SIM card slot	
Expansion Bus	1 x M.2 B-Key 2242/3042/3052 (PCIe x2 + USB3.0) w/ 2 x nano SIM card slots for 5G module 1 x M.2 E-Key 2230 (CNVi + USB 2.0) slot for WiFi /BT <b>**Support CNVi modules only**</b>
<b>External I/O</b>	
Serial Ports	2 x DB-9 connectors for RS-232 1 x DB-9 connectors for RS-232/422/485
USB Ports	4 x USB-A 3.2 Gen2 ports
LAN	1 x RJ-45 2.5 GbE LAN ports 2 x RJ-45 GbE ports
Video	1 x HDMI 2.0b, up to 3840x2160@60Hz 1 x DisplayPort 1.4, up to 3840x2160@60Hz
DIO	8 x DI & 8 x DO w/ 1.5KV isolation
Others	4 x Antenna holes
<b>Mechanical</b>	
Mounting Type	Panel mount & VESA-100 mounting
Material	Aluminum front bezel and SGCC chassis
Dimension (W x H x D)	470 x 295 x 65.8 mm
Weight (Net)	6.7 kg
<b>Environmental</b>	
Operating Temp.	-20°C ~ 55°C
Storage Temp.	-30°C ~ 70°C
Operating Humidity	10 ~ 95% RH @ 55°C (non-condensing)
Vibration	5 ~ 500Hz, 1Grms random (w/ SSD)
Shock	Operating 10G, 11ms non-operating 30G, 11ms (w/ SSD)
<b>Ordering Information</b>	
ASLAN -W1019C	18.5" Soldered onboard Intel® 11 <sup>th</sup> Gen Core™ i5-1145G7E Processor 1.50 GHz processor, wide-screen industrial panel PC w/ 4GB Memory



## Dimensions

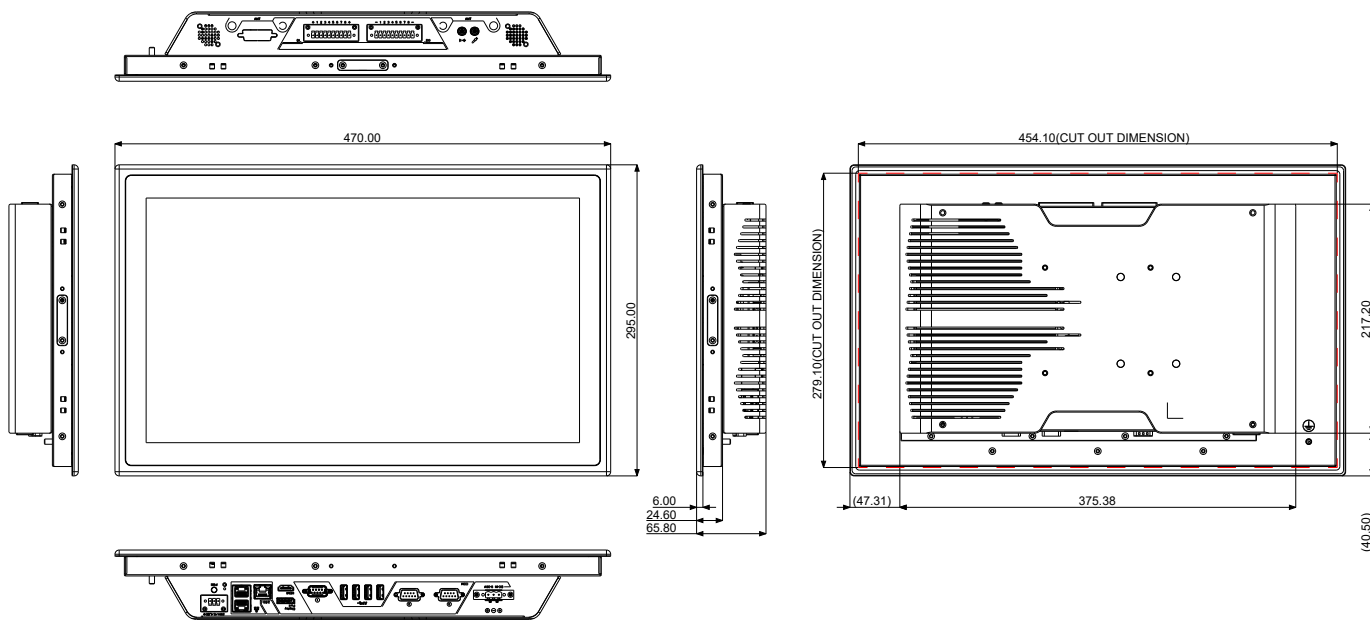

## Optional Accessories

PAC-120W6B-FSP-ES 19V/6.32A 120W AC/DC power adapter kitt



64/128/256GB SSD 2.5" SSD MLC 64/128/256GB



WiFi-AT4550 Atheros QCNFA324 Wi-Fi module w/ 2\*30cm internal wiring



ANT-D11 1 x Wi-Fi Dual-band 2.4G/5G antenna



SCK-722C Assembly kit for SiP-41B/42B



ADK-W9X Audio kit for ASLAN-W900 series

