



### Features

- Powered by NVIDIA® Jetson Orin™ Nano
- Onboard 8GB / 4GB 128-bit LPDDR5
- Multiple I/O interface connections for data collection  
Gigabit LAN, USB 3.1, Serial Port, CAN-FD
- Wide operating temperature range -20°C to 60°C


### Specifications

System		Interface	
CPU/GPU	NVIDIA® Jetson Orin™ NX 6-core Arm® Cortex®-A78AE v8.2 64-bit CPU  1024/512-core NVIDIA Ampere architecture GPU with 32/16 Tensor Cores	Serial Port	1 x RS-485
Memory	Onboard 8GB / 4GB 128-bit LPDDR5	CAN Bus	1 x CAN bus
Storage	1 x M.2 M-Key 2280, support NVMe	Ethernet	2 x GbE LAN, RJ45
Real time clock	Yes	USB	4 x USB 3.1, Type-A
Indicators	LED indicator x 1 (Power)	DI/DO	--
Wireless	1 x M.2 E-Key 2230 1 x M.2 B-Key 3052	AI/AO	--
Operating System	Linux (NVIDIA Jetpack 5.1 and above)	Display	1 x HDMI 2.0-Out
<b>Power Supply</b>		Power Connector	Terminal Block
Power Requirement	9 to 36 VDC	Debug Port	1 x Micro USB for console
Power Consumption	Max. 15W (with Fan)	Expansion Slot	1 x SIM card slot 1 x Micro SD slot
MTBF (Hours)	--	Other Interface	--
<b>Environmental and Mechanical</b>			
Dimension	136mm x 110mm x 57mm		
Weight	0.9 kg		
Mouting/Installation	Din Rail, Wall Mount, VESA		
Operating Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)		
Storage Temperature	-40 °F ~ 176 °F (-40 °C ~ 85 °C)		
Operating Humidity	10% ~ 95% relative humidity, non-condensing		
<b>Certification</b>			
Regulations	CE, FCC		
Carrier	Planning		

Radio Frequency		
<b>LTE 4G (CAT 1) (Optional)</b>	3GPP Rel.9 compliant protocol Frequency bands: FDD LTE: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19 /B20 /B25/B26/B28 TDD LTE: B38/B39/B40/B41 WCDMA: B1/B2/B4/B5/B6/B8/B19 GSM: B2/B3/B5/B8	SIM card size: Micro-SIM slot Antenna type: External type Antenna connector: SMA-Male
<b>GPS (Optional)</b>	GPS/GLONASS/BeiDou (Compass)/Galileo	

## Dimension

Unit: mm / inch

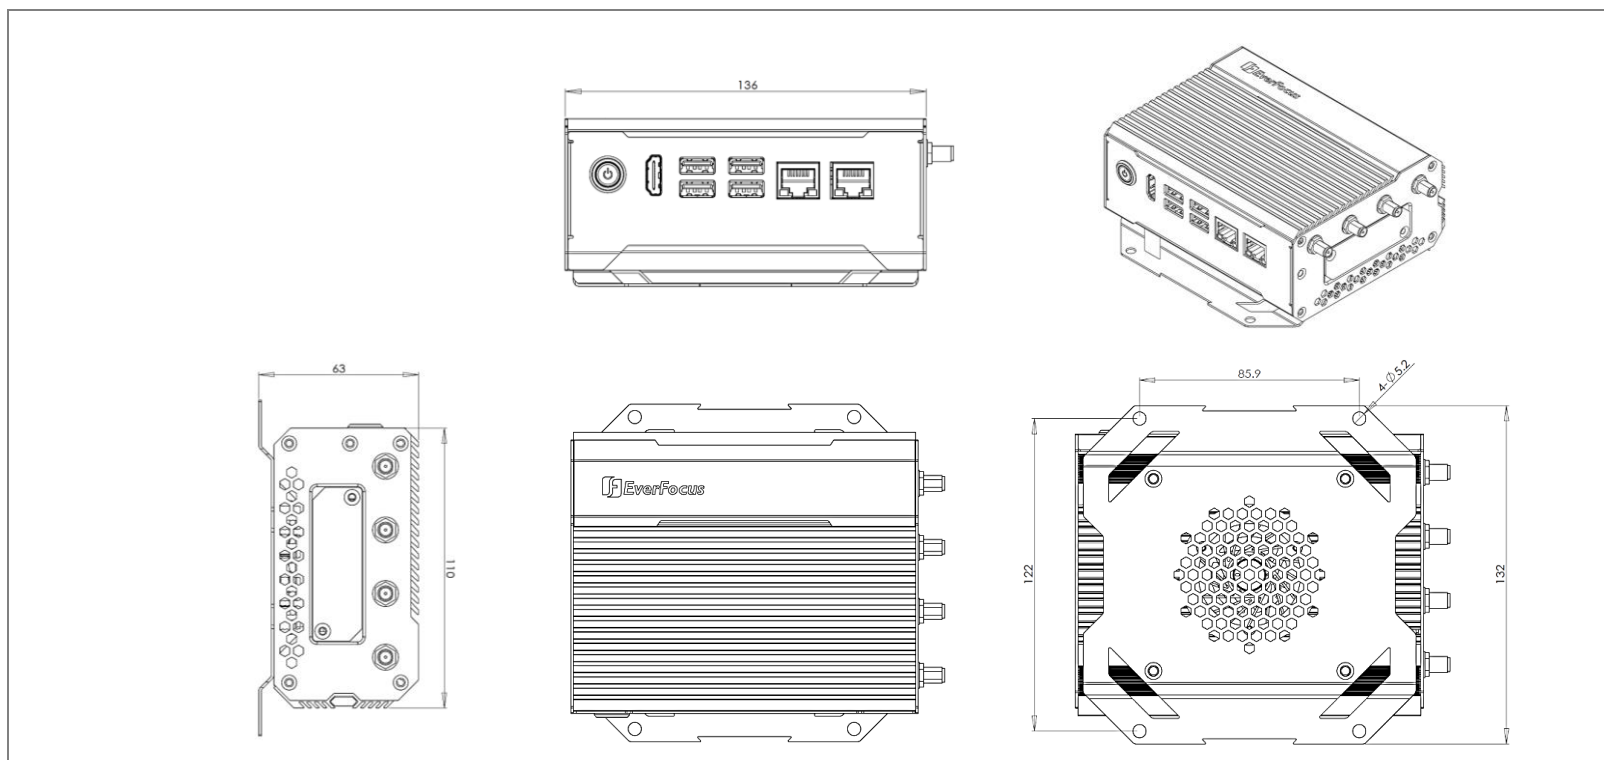

## Ordering Information

Part Number	Packing List
<b>eNVP-JON-AI-F2000</b> NVIDIA® Jetson Orin™ Nano, 4GB, 9 to 36VDC	<b>eNVP-JON-AI BOX x1</b> <b>3-pin Terminal block Connector x1</b> <b>5-pin Terminal block Connector x1</b> <b>Wall Mount x1</b>
<b>eNVP-JON-AI-F3000</b> NVIDIA® Jetson Orin™ Nano, 8GB, 9 to 36VDC	
<b>eNVP-JON-AI-F2500</b> NVIDIA® Jetson Orin™ Nano, 4GB, 128GB NVMe, 9 to 36VDC	
<b>eNVP-JON-AI-F3500</b> NVIDIA® Jetson Orin™ Nano, 8GB, 128GB NVMe, 9 to 36VDC	

## Optional Accessories

Part Number / Item	
4170A000012	Cable,DC Jack to 2P,L=50
4B01XUD12060AS3	Adapter (In:100-240V / Out: DC12V 5A 60W)
4K02X00000030AR	Power Cord EU
4K02X00000020AR	Power Cord US