



1U Rackmount System


## Specifications :

- |                     |  |
|---------------------|--|
| ■ Product Dimension | ■ 430 (W) * 250 (D) * 44 (H) mm  |
| ■ Product model     | ■ JBC150F594-Q170-B  |
| ■ MB Model          | ■ NF594-Q170 (Mini-ITX)<br>■ CPU : Intel LGA 1151 Socket Core™ i3, i5, i7 & Pentium Processors<br>■ Chipset : Intel® Q170 Express Chipset<br>■ Memory : DDR4-2133MHz / SO-DIMM *2 / Max : 32GB   |
| ■ Specs Devices     | ■ <u>3.5" SATA Device * 1 or 2.5" SATA Device * 2</u>  |
| ■ Case Colors       | ■ Black  |
| ■ Front I/O Port    | ■ Power SW * 1 , Reset SW * 1<br>■ Power LED * 1 , HDD R/W LED * 1<br>■ USB 2.0 Port * 2   |
| ■ Rear I/O Port     | ■ Power SW * 1 , Reset SW * 1<br>■ Power LED * 1 , HDD R/W LED * 1<br>■ Intel Giga LAN Port * 2 (INI219LM + i211AT)<br>■ DVI-I Port * 1, HDMI * 1, DP * 1<br>■ COM Port * 2 (1*RS232 ,1* RS232/422/485 )<br>■ USB 3.0 Port * 6<br>■ MIC * 1, Line in * 1, Line out * 1<br>■ AC Input * 1 |
| ■ PSU               | ■ 1U-200W / Support PFC / 150 (L) *81.5 (W) *40.5 (H) mm (FLEX)  |
| ■ FAN               | ■ 4020 FAN * 3 / 7000 rpm / DC-12V-0.1A / 8 CFM  |
| ■ Expansion         | ■ PCI-E x 16 Slot * 1  |
| ■ Storage           | ■ 3.5" HDD * 1 or 2.5" HDD * 2 (Support SATA 3 )   |
| ■ Accessory         | ■ Power cord * 1<br>■ Quick Installation Guide * 1<br>■ User Manual * 1<br>■ Screw Package * 1<br>■ CD * 1   |

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>■ Packing</li> </ul>      | <ul style="list-style-type: none"> <li>■ Net Weight : 3.5KG</li> <li>■ Gross Weight : 4.5KG</li> <li>■ Color Box Dimension : 530 (W) x 352 (D) x 142 (H) mm</li> </ul> |
| <ul style="list-style-type: none"> <li>■ Safety</li> </ul>       | <ul style="list-style-type: none"> <li>■ CE , FCC , RoHS , REACH</li> </ul>  |
| <ul style="list-style-type: none"> <li>■ Applications</li> </ul> | <ul style="list-style-type: none"> <li>■ Industrial Control System</li> <li>■ Networking Server System</li> <li>■ Workstation</li> </ul>                               |

**External I/O :**

**Front**

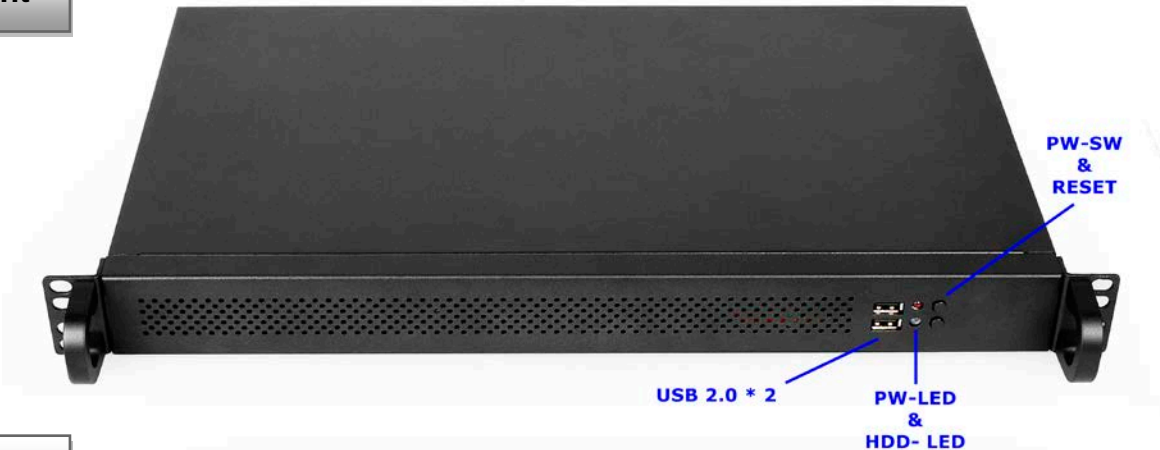

**Rear**

