



Fanless Embedded System With POE




Specifications :

■ Product Dimension	■ 264 (W) * 199.4 (D) * 38 (H) mm
■ Product Model	■ JBC512F3EG(W)-5200-B
■ MB Model & Size	■ NF3EP-5200 / 3.5" SBC
■ BIOS	■ AMI 32MB SMT Flash ROM
■ CPU	■ Intel® Broadwell I5 5200U
■ Memory	■ 2 * SO-DIMM (Dual Channel DDR3L 1333/1600MHz SDRAM)
■ Storage Space	■ 2.5" SATA Device * 1
■ Colors	■ Black
■ Front I/O Port	<ul style="list-style-type: none"> ■ 4 PIN AC Input * 1 ■ AC ON-OFF * 1 ■ Power LED * 1 , Power SW * 1 ■ USB 2.0 * 2
■ Rear I/O Port	<ul style="list-style-type: none"> ■ USB3.0 * 4 , USB2.0 * 2 ■ HDMI * 2 ■ Giga LAN Port * 2 ■ Audio * 1 ■ WiFi Port * 2 (JBC512F3EGW-5200-B only)
■ 1000M POE Port (Rear I/O)	<ul style="list-style-type: none"> ■ 10/100M/1000M Base-TX RJ45 Ports * 4 ■ Conforms to IEEE802.3af, IEEE802.3at ■ IEEE 802.3x full-duplex flow control, per port up to 23W ■ For Switch : Marvell 88E6176 ■ For PoE : MAX5980

■ Power Source	■ 150W AC to DC OP Power inside ■ AC 90~240V input
■ Accessory	■ AC Cable * 1 ■ 4 Pin Terminal block con * 1 ■ User Manual * 1 , CD * 1 , Screw Package * 1
■ Packing	■ Net Weight : 3.6KG ■ Gross Weight : 4.5KG ■ Color Box Dimension : 406 (W) x 148 (D) x 359 (H) mm
■ Temperature	■ Operating within 0~50 centigrade ■ Storage within -10~70 centigrade
■ Certification	■ EMC : CE , FCC ■ Safety : RoHS , ErP
■ Applications	■ Industrial Control System ■ Networking Server System ■ Security Industry

External I/O :

Front

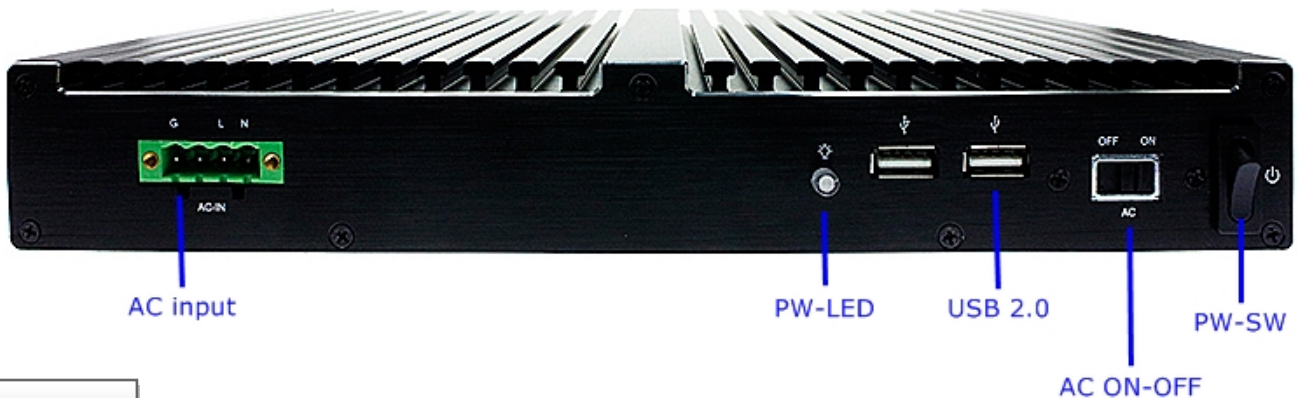

Rear

