

MISCOM6208

8-port Layer 2 Fast Ethernet Managed DIN-RAIL

Industrial Ethernet Switch



- ◆ 8 100M Ethernet interfaces to provide users with flexible networking methods;
- ◆ 10Base-T/100Base-TX adaptive, full/half duplex, support automatic MDI/MDI-X connection;
- ◆ The patented technology of rapid ring network redundancy (MW-Ring) of less than 20ms enhances the reliability of system communication;
- ◆ The use of high-strength enclosed aluminum shell, IP40 protection level, no fan shell fan heat, durable, stable and reliable;
- ◆ Support industrial grade with isolated power supply, and provide redundant dual power input to meet the requirements of high availability;
- ◆ -40°C~85°C working temperature meets the application requirements of harsh industrial environment.



RoHS



IP40

Product Introduction

MISCOM6208 series supports 8 optional 100M photoelectric interfaces, adopts a store-and forward mechanism, has a powerful bandwidth processing capability, supports line-speed forwarding, and data transmission is fast and smooth. It is suitable for multiple kind of application scenarios. The product selects industrial-grade components, with high-standard system design and production control, rail-type aluminum alloy shell, sturdy and durable, fan-less high-efficiency heat dissipation, wide temperature operation from -40°C to 85°C, high-standard industrial protection design, and can adapt to various a harsh working environment and stable communication performance.

MISCOM6208 series can be managed through Web management or SNMP, while providing MW-Ring, virtual local area network, Trunk, Quality of Service, IGMP Snooping, rate control, port mirroring, static MAC address forwarding, diagnostic functions, Email/Relay, and a series of commonly used advanced management functions such as fault alarm and firmware online upgrade.

Product Features



- ◆ 8 100M Ethernet interfaces to provide users with flexible networking methods;
- ◆ Embedded Web server, remote management and configuration via browser;
- ◆ Link redundancy self-recovery technology based on MW-ring technology, self-healing time is less than 20ms;
- ◆ Trunk port aggregation;
- ◆ Implement broadcast storm detection control (including storm type detection such as broadcast, multicast, and unknown unicast);
- ◆ Online firmware upgrade;
- ◆ Dynamic IGMP Snooping support, filtering multicast traffic;
- ◆ Bandwidth management to prevent unpredictable network problems;
- ◆ Based on IEEE 802.1Q VLAN;
- ◆ Support QoS, IEEE802.1p and ToS/DiffServe to improve communication quality;
- ◆ Support SNMP V1/V2C/V3 different levels of network management;
- ◆ Support RMON and private MIB, effective remote data monitoring and prediction capabilities;
- ◆ Support port mirroring for online debugging;
- ◆ Real-time network time synchronization;
- ◆ Meet the requirements of trouble-free work in a strong electromagnetic interference environment.

Product Specifications

| Parameters | |
|----------------------------|--|
| IEEE standard | 802.3, 802.3u, 802.3z, 802.3x, 802.1P, 802.1Q, 802.1D/W, etc. |
| Switching function | Support VLAN, GVRP |
| | Support port speed limit, support storm suppression |
| | Support port aggregation |
| | Support port flow control |
| Redundant technology | Support MW-Ring ring network technology |
| | Support RSTP/STP |
| Multicast technology | Support IGMP v1/v2, IGMP Snooping |
| | Support GMRP |
| | Support static multicast |
| Management and maintenance | Support Console, WEB management mode |
| | Support SNMPv1/v2c/v3 |
| | Support unified upper computer software management |
| Exchange method | Store and forward |
| Backplane bandwidth | 2Gbps |
| RJ45 port | 6/8 10Base-T/100Base-TX |
| Optical port | 2 100Base-FX |
| Electrical port parameters | Physical interface: RJ45 with shielding, IEEE802.3 standard |
| | RJ45 port: 10Base-T/100Base-TX, support auto-negotiation function |
| | Transmission distance: 100 meters (standard CAT5/CAT5e cable) |
| Fiber port parameters | Luminous power: >-12dBm (single mode) >-17dBm (multimode) |
| | Receiving sensitivity: <-38dBm (single mode) <-35dBm (multimode) |
| | Wavelength: 1310nm (single mode) 1550nm (single mode) 850 nm (multimode) 1310 nm (multimode) |
| | Transmission distance: Multimode fiber 850nm, 2km; 1310 nm, 2/5km Single mode fiber 1310nm, 20/40/60km; 1550nm, 20/40/60/80/120km |
| | Connector type: SC/ST/FC |
| | Transmission rate: 155Mbps |
| Power | Input voltage: DC power supply DC9~60V AC power supply AD220V (AC85~264V/DC110~370V) |
| | Input power consumption: 8W (MAX) |
| | Overcurrent protection: built-in |
| | |
| Mechanical | Physical dimensions (width × height × depth): 144mm×54mm×110mm |

| | |
|---------------------|--|
| | Installation method: standard DIN rail type |
| | Heat dissipation form: aluminum alloy single-rib chassis surface heat dissipation, no fan |
| | Case protection: IP40 |
| Working environment | Working temperature: -40°C~+85°C |
| | Storage temperature: -40°C~+85°C |
| | Humidity: 5%~95% (no condensation) |
| EMC | EN61000-4-2 anti-static (ESD): ±8kV contact discharge, ±15kV air discharge |
| | EN61000-4-3 electromagnetic field: 10V/m (80-1000MHz) |
| | IEC61000-4-4 instantaneous high voltage (burst): ±4kV power line, ±2kV data line |
| | IEC61000-4-5 surge voltage: ±4kV (line/earth), ±4kV (line/line) Power cord, ±2kV data line |
| | EN61000-4-6 anti-conduction: 3V (10kHz~150 kHz), 10V (150kHz~80 MHz) |
| | EN55022: EN55022 Class A |

Installation Size

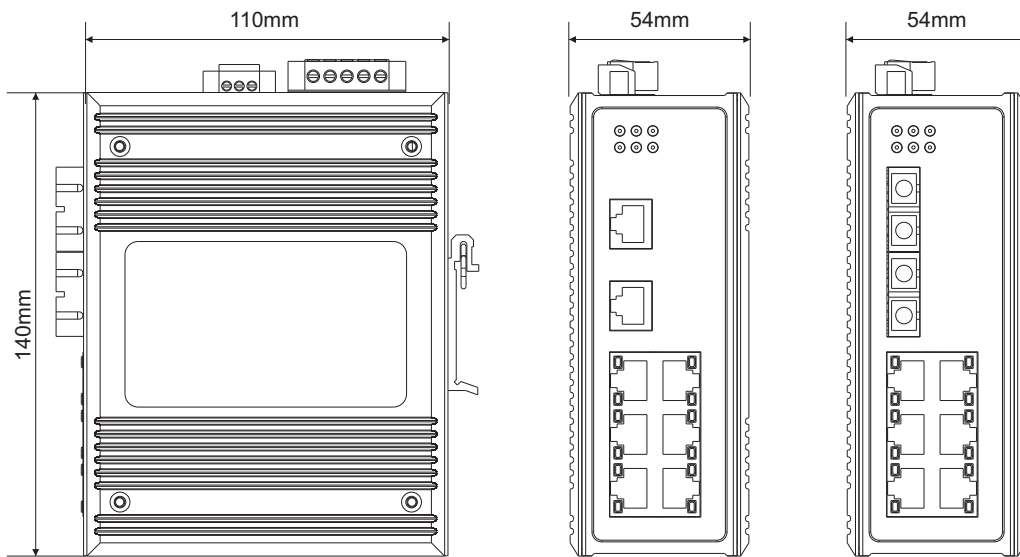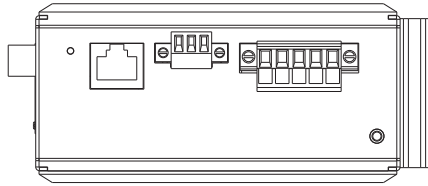

Ordering Information

| Product Model | 100M Based-FX | 10/100M Based-TX | Power |
|------------------------------|------------------|---------------------|------------------|
| MISCOM6208 | / | 8 | Dual DC9~60V |
| MISCOM6208-AD220 | / | 8 | Single AC/DC220V |
| MISCOM6208-2F (M/S) | 2 | 6 | Dual DC9~60V |
| MISCOM6208-2F (M/S) -AD220 | 2 | 6 | Single AC/DC220V |