

# Cut Off Wall Pack

Outdoor Lighting



40W

## Introducing our New Cut Off Wall Pack

### Features

- UL cUL DLC certificate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Output constant current lever can be adjusted through output cable with 1-10V

### Advantage

- IP65 Internal driver, Input voltage 100-277Vac
- No UV or IR in the beam
- Easy to install and operate
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

### Recommended Use

- Entrance lighting / Courtyard lighting
- Industrial lighting / Outdoor landscape lighting
- Building / Hotels & Motels / Wall lighting area

### Input Voltage

- 100-277Vac

### Qualification



 **BEYOND<sup>®</sup>**  
LED TECHNOLOGY

1939 Parker Ct Suite C Stone Mountain, GA 30087 | Phone: (866) 786-1117 | [www.beyondledtechnology.com](http://www.beyondledtechnology.com)

# Cut Off Wall Pack

## Outdoor Lighting

### Product

| LED Cut Off Wallpack Light |                      |
|----------------------------|----------------------|
| SKU #                      | 150462               |
| MODEL #                    | BLT-FWP01-40CT4A1-57 |
| CONSUMPTION                | 40W                  |
| LUMENS                     | 4700Lm               |
| DRIVER TYPE                | FD-36H-054B-YYYY     |


### Specifications

|                   |                       |
|-------------------|-----------------------|
| COLOR TEMPERATURE | 5700K                 |
| VIEWING ANGLE     | 150°90°               |
| INPUT VOLTAGE     | 100 - 277Vac, 50/60Hz |
| POWER FACTOR      | >0.9                  |
| WATERPROOF RATING | IP65                  |

### Fixture Specifications

|                      |                             |
|----------------------|-----------------------------|
| LED BRAND            | Seoul3030                   |
| LED TYPE             | SAW7C22B-NZ                 |
| HOUSING              | Aluminum (ADC12) +PC        |
| HOUSING COLOR        | Brown                       |
| OPTIONAL ACCESSORIES | Photocell / Surge protector |
| LED QUANTITY         | 80 PCS                      |
| CCT OPTIONS          | 3000K, 4000K & 5000K        |

CORRELATED  
COLOR TEMPERATURE  
(CCT)

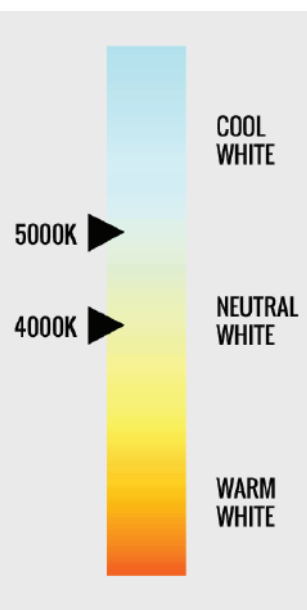

### Others

| OPERATING TEMPERATURE | APPLICATION | CRI | BEAM ANGLE | DIMMABLE |
|-----------------------|-------------|-----|------------|----------|
| -4°F TO 113°F         | Outdoor     | >70 | 150°90°    | No       |

### Warranty & Qualification


| WARRANTY       | UL LISTED | DLC |
|----------------|-----------|-----|
| 5 Year Limited | Yes       | Yes |

Due to continuous product improvement, information in this document is subject to change.  
 Revision Date: 01/21/2019  
 1939 Parker Ct Suite C Stone Mountain, GA 30087 | Phone: (866) 786-1117 |  
[www.beyondledtechnology.com](http://www.beyondledtechnology.com)

# Cut Off Wall Pack


## Outdoor Lighting

### Drawing

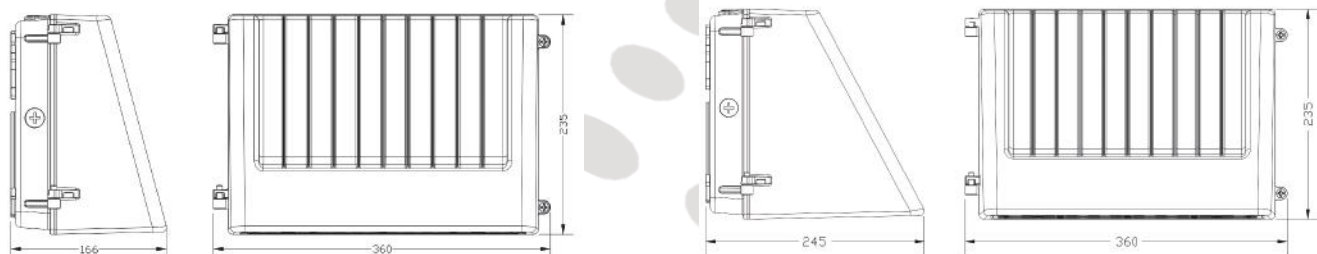

40W

| BOX TYPE  | LAMPS NET WEIGHT | QTY / CARTON | SIZE                 | WEIGHT / CARTON |
|-----------|------------------|--------------|----------------------|-----------------|
| Outer Box | 5.3 lbs          | 1 PC         | 15.7" X 11.8" X 8.6" | 7.7 lbs         |

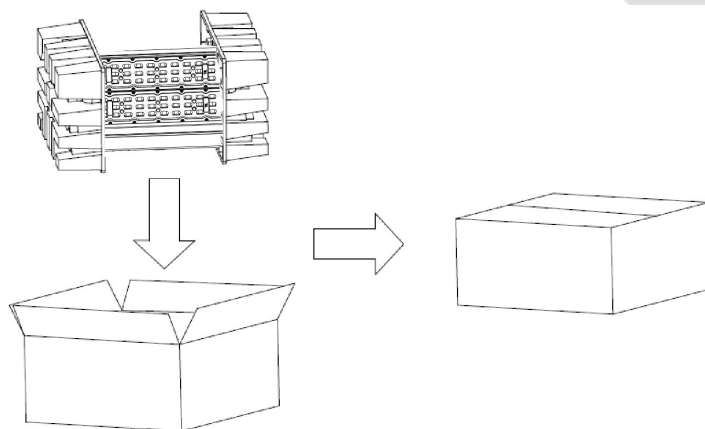

### Notice For User

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated
- Licensed Electrician Installation ONLY.

Due to continuous product improvement, information in this document is subject to change.  
 Revision Date: 01/23/2019  
 1939 Parker Ct Suite C t e t a 3 | Phone: (866) 786-1117 |  
[www.beyondledtechnology.com](http://www.beyondledtechnology.com)

 **BEYOND**<sup>®</sup>  
LED TECHNOLOGY

# Cut Off Wall Pack

## Outdoor Lighting

### Light Distribution Testing Parameters

40W

| DATA OF LAMP      |         | PHOTOMETRIC DATA Eff: 114.35 lm/W |        |                     |           |
|-------------------|---------|-----------------------------------|--------|---------------------|-----------|
| MODEL             |         | I <sub>max</sub> (cd)             | 1669.8 | S/MH (C0/180)       | 1.51      |
| NOMINAL POWER (W) | 40      | LOR (%)                           | 100.0  | S/MH (C90/270)      | 1.05      |
| RATED VOLTAGE (V) | 120     | TOTAL FLUX (lm)                   | 4648.3 | η UP, DN (C0-180)   | 0.5, 58.1 |
| NOMINAL FLUX (lm) | 4648.33 | CIE CLASS                         | DIRECT | η UP, DN (C180-360) | 0.8, 40.6 |
| LAMPS INSIDE      | 1       | η up (%)                          | 0      | CIBSE SHR NOM       | 1.50      |
| TEST VOLTAGE (V)  | 120     | η down (%)                        | 100.0  | CIBSE SHR MAX       | 1.50      |

