



MODEL: **SPJ-60L12**  
**WET LOCATION**  
 MATERIAL: **Solid Brass**  
 FINISH SHOWN: **Black**  
 INPUT: **120V 60Hz**  
 OUTPUT: **11.5V**  
 WATTAGE: **60**  
 EFFICIENCY: **89.2%**  
 COIL FORMER: **Double section bobbin**  
 THERMAL: **B 130°C**  
 CLASS:  
 LEADS **PVC 600V #20**  
 PRIMARY:

**NIGHTPOWER** BY **SPJ LIGHTING**  
**TRANSFORMERS**  
**ON DUTY**

Precise Power & Control

**Transformer**

Input leads are 20 AWG. Output leads are 14 AWG. Lead insulation is 105 °C. The transformer uses a class B 130 °C insulation system.



**Enclosure**

Enclosure temperature will not exceed 70 °C @ 40 °C ambient. Wiring compartment has 2 knockouts sized for 3/4 inch screw cable connectors. The removable cover for the wiring compartment is secured in place by a screw. The enclosure is black powder coated.

**General**

- Manual reset thermal circuit breaker on the secondary side.
- Controlled with a low-voltage dimmer.
- ETL listed
- CSA listed
- UL standard 5085-1
- NEMA 3R enclosure

2.20"

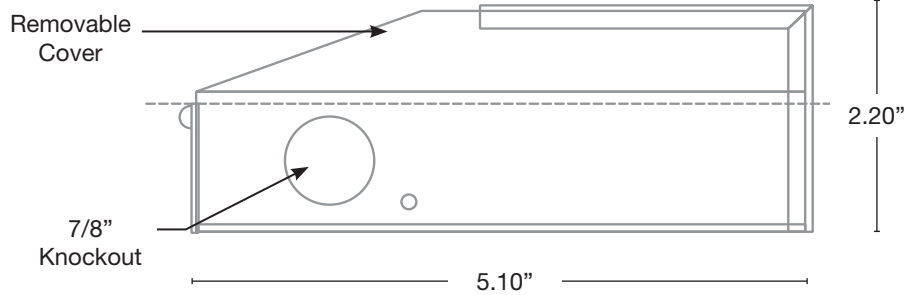

**Wet Listed**



Ordering Example

Customer Approval

Date

FB-300DB