


EUROSTYLE COLLECTION

SPECIFICATIONS


- 120-277V INPUT VOLTAGE, 50/60Hz
- CONSTANT CURRENT AT 700 MILLIAMPS
- DRIVER UL CLASS 2, POWER FACTOR > .90
- OPERATING TEMPERATURE -18°C (0°F) TO 40°C (104°F) (25°C NOMINAL)
- ESTIMATED 50,000 HRS L₇₀*
- THERMALLY PROTECTED LED ARRAY
- POWDERCOATED ALUMINUM BACK PAN
- MOLDED OF DURABLE NON-CORROSIVE UV RESISTANT PLASTICS
- WALL MOUNT ONLY
- UL/CUL LISTED FOR WET LOCATION
- STANDARD PACK QTY: 6





SPJ112

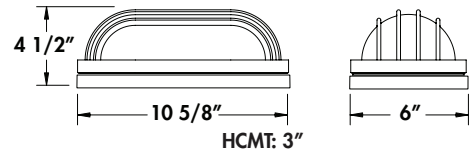


SPJ111



SPJ113

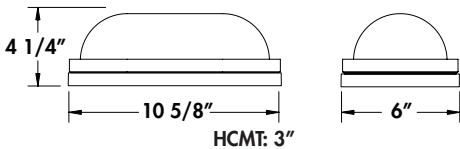

SPJ114

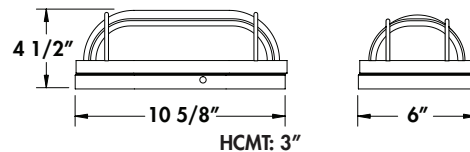

EXAMPLE # **SPJ111-L900C-BFP**

STYLE #	SOURCE/WATTAGE	COLOR TEMP	BODY	DIFFUSER	OPTION
SPJ111 = OVAL SPJ112 = GRILL SPJ113 = HOOD SPJ114 = GRID	L900C = 4 CREE LED ARRAY (10W) 11.3W POWER INPUT 912 LUMENS 80 LUMENS PER WATT**	4000K CRI = 74 (TYP)	B = BLACK W = WHITE	F = FROSTED	P = PHOTOCELL Photocells are only available for 120V applications

L900C LED REPLACEMENT PARTS
L09C-DC-700-04-R = 4 CREE LED ARRAY
IG900-DMV-1 = LED DRIVER

* DATA PER LM80/TM21 @ 1000MA AVAILABLE UPON REQUEST

** ESTIMATED FOR LED SOURCE

For more information regarding SPJ Lighting's LED Fixtures and Custom Packaging please contact our sales department at **800-469-3637** or visit www.spjlighting.com.com



Specifications, design & components subject to change without notice. Printed in U.S.A. © 2012 SPJ Lighting Inc.

1203.1