

The Strut LED bollard exemplifies the epitome of a modern, minimalist aesthetic. The clean lines and modern design can effortlessly disappear into the setting or be positioned to make a bold statement. A singular line of LED down light with controlled Type II distribution is ideal for outdoor path and campus illumination.

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Type II asymmetric light distribution

SPECIFICATIONS

DELIVERED LUMENS	1312
WATTS	19.3
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
SECONDARY SURGE PROTECTOR	10kA
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Type II
MOUNTING OPTIONS**	Bolt
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse
CCT	2700K, 3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U1-G1
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	7.5 lbs.



STRUT BOLLARD
shown in bronze

STRUT BOLLARD
shown in charcoal


STRUT BOLLARD
shown in black

* Visit techlighting.com for specific warranty limitations and details.
**Bollard base not suitable for branch circuit through wiring.


ORDERING INFORMATION

PRODUCT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
700OBSTR	827 80 CRI, 2700K 830 80 CRI, 3000K 840 80 CRI, 4000K	42 42"	C FLAT CLEAR	B BLACK Z BRONZE H CHARCOAL	UNV 120V-277V	2 TYPE 2 DISTRIBUTION	NONE PC BUTTON PHOTOCONTROL* LF IN-LINE FUSE* PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE*

*FOR USE ONLY IN 120V-277V VERSION.

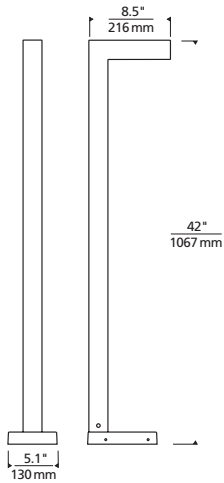

Strut Bollard

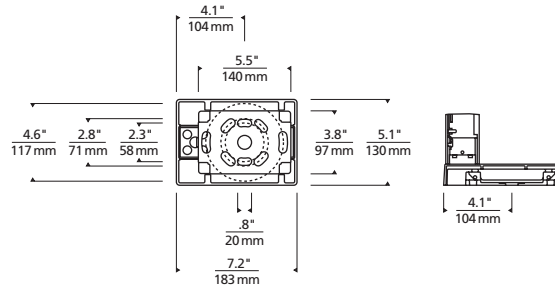


Anchor Plate Bolt Pattern

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

STRUT BOLLARD

Total Lumen Output:	1312
Total Power:	19.3
Luminaire Efficacy:	67.7
Color Temp:	4000K
CRI:	80+
BUG Rating:	B1-U1-G1

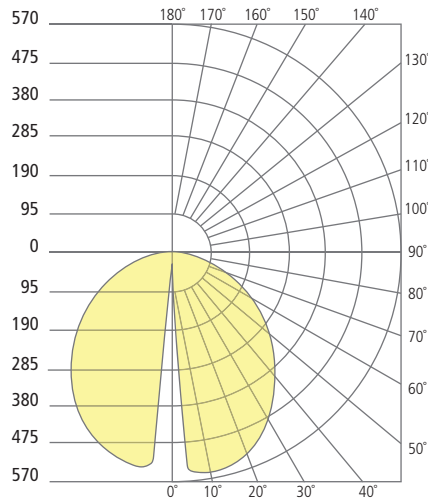

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES
