

The Aspenti wall sconce adds the perfect finish to any exterior space. With its cylindrical profile and modern industrial appearance, the Aspenti features up and down light for optimal illumination making it ideal for a number of commercial or residential outdoor lighting applications. Available in two finishes and three sizes.

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

SPECIFICATIONS

DELIVERED LUMENS	1028.4
WATTS	13.7
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
OPTICS	36°
MOUNTING OPTIONS	Wall
CCT	3000K
CRI	90
COLOR BINNING	3-Step
BUG RATING	B1-U3-G0
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 hours
WARRANTY*	5 years
WEIGHT	6.5 lbs.

* Visit techlighting.com for specific warranty limitations and details.



ASPENTI 14
shown in bronze




ASPENTI 14
shown in charcoal

ORDERING INFORMATION

PRODUCT	SIZE	FINISH	LAMP
7000WAST	14 14"	Z BRONZE	-LED930 LED 90CRI, 3000K, 120V
		H CHARCOAL	-LED930-277 LED 90CRI, 3000K, 277V

ASPENTI 14 WALL SCONCE

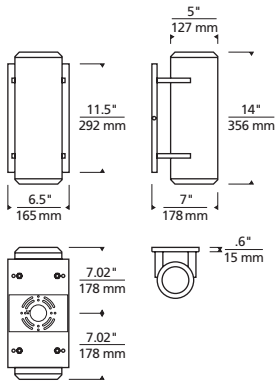


Aspenti 14

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ASPENTI 14

Total Lumen Output: 1028.4
 Total Power: 13.7
 Luminaire Efficacy: 75
 Color Temp: 3000K
 CRI: 90
 BUG Rating: B1-U3-G0

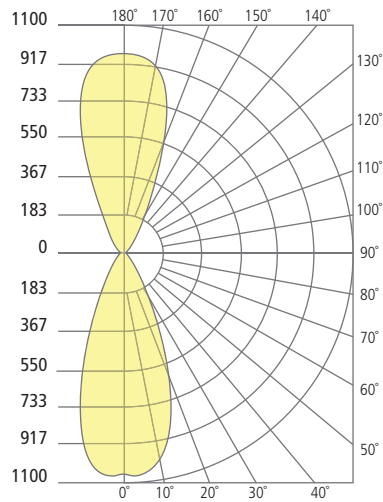

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.