

Featuring a thick, square polished pressed-glass shade suspended from a die-cast base, the modern Boxie's LED light source beautifully illuminates a space without calling attention to itself. It easily mounts to the ceiling or wall for ultimate flexibility. Available in two modern finishes and two sizes. Transition seamlessly from indoors to outdoors with Boxie Indoor fixtures.

Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Ceiling or wall mounting option

SPECIFICATIONS

DELIVERED LUMENS	472.2 LED
WATTS	12 LED
VOLTAGE	120V, 277V (LED only)
DIMMING	120V ELV and Triac 277V not dimmable
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall or Ceiling
CCT	3000K or 4000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U3-G1
DARK SKY	Compliant (Ceiling)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	4 lbs.



BOXIE SMALL
shown in bronze



BOXIE SMALL
shown in charcoal




* Visit techlighting.com for specific warranty limitations and details.

ORDERING INFORMATION

PRODUCT	SHAPE	CRI/CCT	FINISH	VOLTAGE
7000WBX	S SMALL - 6"	930 90 CRI, 3000K	Z BRONZE	120 120V
		940 90 CRI, 4000K	H CHARCOAL	277 277V
		INC INCANDESCENT*		

*120V ONLY

BOXIE SMALL WALL/CEILING




Boxie Small

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

BOXIE SMALL

Total Lumen Output: 472.2
 Total Power: 12
 Luminaire Efficacy: 39.35
 Color Temp: 2700K
 CRI: 90+
 BUG Rating: B1-U3-G1

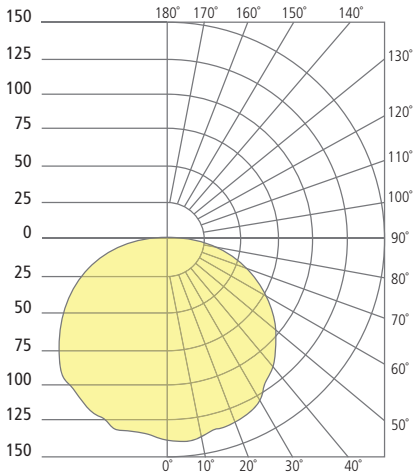

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

