

Classic Series Tall LED Wall Light



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| WL | 20LED | 83 | 1,696 | 87 | 1,696 | 87 | 1,788 | 92 | 1,788 | 92 | 19 | 100W MH |

Scan QR code above for ordering format and more detailed information

Classic Series Small LED Wall Light



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| WLSG | 27LED | 83 | 2,749 | 105 | 2,749 | 105 | 3,017 | 113 | 3,017 | 113 | 27 | 100W MH |

Scan QR code above for ordering format and more detailed information

CLASSIC SERIES - EASY INSTALL



- Bubble level
- Opens to side
- Same size as existing



PRODUCT VIDEO
Scan to view

Classic Series Medium LED Wall Light



FULLY SELECTABLE
-☀️+ LUMEN • CCT



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO | | |
|-------------------|-------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | | | |
| SELECTABLE | | | | | | | | | | | | |
| WLMS | 3-9L | 80 | 2,601 | 120 | 2,704 | 125 | 2,602 | 121 | 22 | 100W MH | | |
| | | | 5,513 | 126 | 5,732 | 131 | 5,516 | 126 | 44 | 175W MH | | |
| | | | 7,892 | 123 | 8,205 | 127 | 7,896 | 123 | 64 | 400W MH | | |
| | | | 9,128 | 120 | 9,490 | 130 | 9,133 | 120 | 76 | 400W MH | | |
| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | |
| WLM | 43LED | 80 | 3,908 | 96 | 5,276 | 122 | 5,726 | 122 | 5,308 | 122 | 44 | 175W MH |
| | 64LED | 80 | 5,699 | 92 | 5,699 | 92 | 6,793 | 113 | 6,793 | 113 | 62 | 400W MH |
| | 80LED | 80 | 8,615 | 109 | 8,615 | 109 | 8,615 | 109 | 8,875 | 113 | 79 | 400W MH |

Classic Series Large LED Wall Light



FULLY SELECTABLE
-☀️+ LUMEN • CCT



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO | | |
|-------------------|--------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | | | |
| SELECTABLE | | | | | | | | | | | | |
| WLDS | 4-13L | 70 | 3,897 | 134 | 4,073 | 139 | 3,889 | 133 | 29 | 175W MH | | |
| | | | 7,688 | 135 | 8,034 | 141 | 7,672 | 134 | 57 | 400W MH | | |
| | | | 11,136 | 130 | 11,638 | 136 | 11,113 | 130 | 86 | 400W MH | | |
| | | | 12,891 | 126 | 13,472 | 138 | 12,864 | 126 | 102 | 400W MH | | |
| | 10-20L | 80 | 9,883 | 135 | 10,151 | 138 | 9,566 | 131 | 73 | 400W MH | | |
| | | | 14,744 | 132 | 15,144 | 135 | 14,271 | 127 | 112 | 400W MH | | |
| | | | 19,447 | 124 | 19,975 | 133 | 18,823 | 121 | 156 | 400W MH | | |
| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | |
| WLD | 64LED | 80 | 7,168 | 117 | 7,168 | 117 | 7,168 | 117 | 7,662 | 126 | 62 | 400W MH |
| | 86LED | 80 | 9,120 | 109 | 9,120 | 109 | 9,120 | 109 | 9,120 | 109 | 84 | 400W MH |
| | 120LED | 80 | 12,510 | 106 | 13,170 | 114 | 13,170 | 114 | 13,170 | 114 | 118 | 400W MH |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



I Independence Series Tall LED Wall Light



CCT SELECTABLE



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| WS | 2L | 80 | 2,254 | 124 | 2,305 | 130 | 2,316 | 127 | 18 | 100W MH |
| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | |
| W | 2L | 80 | 2,283 | 112 | 2,133 | 110 | 2,285 | 112 | 21 | 100W MH |

Scan QR code above for ordering format and more detailed information

I Independence Series Small LED Wall Light



FULLY SELECTABLE
-☀+ LUMEN • CCT



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO | | |
|-------------------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | | | |
| SELECTABLE | | | | | | | | | | | | |
| WSGS | 1-4L | 80 | 1,006 | 148 | 1,047 | 154 | 1,000 | 147 | 7 | 100W MH | | |
| | | | 2,381 | 146 | 2,479 | 152 | 2,367 | 145 | 16 | | | |
| | | | 3,534 | 140 | 3,680 | 146 | 3,513 | 139 | 25 | | | |
| | | | 4,329 | 134 | 4,507 | 145 | 4,303 | 134 | 32 | | | |
| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | |
| WSG | 4L | 80 | 3,913 | 125 | 3,913 | 125 | 3,913 | 125 | 4,044 | 123 | 31 | 100W MH |

Scan QR code above for ordering format and more detailed information

CONTRACTOR'S CORNER

INDEPENDENCE SERIES - EASY INSTALL



- Bubble level
- Opens to side
- Same size as existing



PRODUCT VIDEO
Scan to view

Independence Series Medium LED Wall Light



FULLY SELECTABLE
- ☀️ + LUMEN • CCT 🌈



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|-------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| WMS | 3-10L | 80 | 2,951 | 137 | 3,072 | 142 | 2,956 | 137 | 22 | 100W MH |
| | | | 6,225 | 142 | 6,481 | 148 | 6,236 | 142 | 44 | 175W MH |
| | | | 8,939 | 139 | 9,307 | 145 | 8,955 | 140 | 64 | 400W MH |
| | | | 10,335 | 136 | 10,760 | 147 | 10,354 | 136 | 76 | 400W MH |

| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|--------------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | |
| WM | 5L | 80 | 4,900 | 128 | 5,036 | 132 | 4,900 | 128 | 5,071 | 132 | 38 | 175W MH |
| | 7L | 80 | 7,051 | 117 | 7,229 | 121 | 7,229 | 121 | 7,349 | 122 | 60 | 400W MH |
| | 10L | 80 | - | - | 10,500 | 135 | 10,500 | 135 | 10,520 | 135 | 78 | 400W MH |

Scan QR code above for ordering format and more detailed information

Independence Series Large LED Wall Light



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| WD | 7L | 80 | 6,046 | 114 | 6,933 | 124 | 6,933 | 124 | 6,933 | 124 | 56 | 400W MH |
| | 10L | 80 | 9,958 | 122 | 9,958 | 122 | 9,958 | 122 | 9,958 | 122 | 82 | 400W MH |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Origin Series Tall LED Wall Light



- Energy-efficient design
- Same footprint as the fixtures they replace, reducing labor costs
- Origin products are backed by the same US-based customer service



| HOUSING | UNIT | CRI | 4000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORTP | 2L | 80 | 1,786 | 127 | 15 | 100W MH |

Scan QR code above for more detailed information

Origin Series Mini LED Wall Light



FULLY SELECTABLE
- ☀️ + LUMEN • CCT 🎛️



- Energy-efficient design
- Same footprint as the fixtures they replace, reducing labor costs
- Origin products are backed by the same US-based customer service



| HOUSING | UNIT | CRI | SELECTABLE 3000K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| ORMWSEL | 2-4L | >80 | 2,287 | 142 | 2,418 | 154 | 2,476 | 154 | 15 | 175W MH |
| | | | 2,934 | 134 | 3,154 | 150 | 3,203 | 149 | 20 | |
| | | | 3,815 | 129 | 4,202 | 147 | 4,238 | 142 | 30 | |

Origin Series Tall LED Vapor Proof



- Durable metal die-cast housing
- LED head is adjustable from 90° to 180°
- Origin products are backed by the same US-based customer service

| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORVP | 2L | 80 | 2,000 | 100 | 2,000 | 100 | 20 | 100W MH |

Scan QR code above for more detailed information

ORWPSEL SWITCH



ORVP ADJUSTABLE HEAD





Origin Series Medium LED Wall Light



FULLY SELECTABLE
-☀️+ LUMEN • CCT 🌈



- Energy-efficient design
- Same footprint as the fixtures they replace, reducing labor costs
- Origin products are backed by the same US-based customer service



| HOUSING | UNIT | CRI | SELECTABLE 3000K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|-------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| ORWPSEL | 2-6L | 80 | 2,173 | 135 | 2,276 | 143 | 2,232 | 137 | 16 | 175-400W MH |
| | | | 4,034 | 134 | 4,224 | 142 | 4,144 | 136 | 30 | |
| | | | 5,998 | 131 | 6,280 | 139 | 6,161 | 133 | 46 | |
| | 5-14L | 80 | 5,468 | 152 | 5,826 | 166 | 5,689 | 158 | 36 | 400W MH |
| | | | 10,509 | 135 | 11,199 | 149 | 10,935 | 141 | 78 | |
| | | | 13,461 | 135 | 14,344 | 148 | 14,007 | 141 | 100 | |

| HOUSING | UNIT | CRI | 4000K CCT | | WATTAGE | REPLACES UP TO |
|--------------|------|-----|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | |
| ORWP | 5L | 80 | 6,178 | 137 | 45 | 175W MH |
| | 10L | 80 | 13,571 | 137 | 99 | 400W MH |

Scan QR code above for ordering format and more detailed information



Origin Series Large LED Wall Light



- Reduced Glare & Offensive Light
- Less Wasted Light
- More Footcandles on the Ground



| HOUSING | UNIT | CRI | 4000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORWPL | 10L | 80 | 15,536 | 157 | 78 | 400W MH |

Scan QR code above for more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



SlimPak Pro Series Small LED Wall Light



FULLY SELECTABLE
-☀️+ LUMEN • CCT



- Quick and easy installation saves time and money
- Hinged at the bottom to prevent water ingress
- External airflow fins help to dissipate heat



| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| WSPSS | 1-4L | 80 | 911 | 105 | 966 | 111 | 921 | 106 | 9 | 100W MH |
| | | | 2,312 | 118 | 2,451 | 125 | 2,337 | 119 | 20 | |
| | | | 3,473 | 115 | 3,683 | 122 | 3,510 | 117 | 30 | |
| | | | 4,047 | 112 | 4,291 | 124 | 4,090 | 113 | 36 | |

| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|--------------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | |
| WSPS | 12LED | 83 | 1,206 | 98 | 1,206 | 98 | 1,326 | 108 | 1,366 | 111 | 12 | 70W MH |
| | 20LED | 83 | 2,125 | 107 | 2,125 | 107 | 2,228 | 110 | 2,418 | 122 | 20 | 100W MH |
| | 40LED | 83 | 3,712 | 100 | 3,712 | 100 | 4,047 | 106 | 4,394 | 116 | 38 | 175W MH |

Scan QR code above for ordering format and more detailed information

SlimPak Pro Series Large LED Wall Light



FULLY SELECTABLE
-☀️+ LUMEN • CCT



- Quick and easy installation saves time and money
- Hinged at the bottom to prevent water ingress
- External airflow fins help to dissipate heat




| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| WSPLS | 2-8L | 80 | 2,238 | 112 | 2,350 | 123 | 2,134 | 107 | 20 | 100W MH |
| | | | 4,640 | 116 | 4,872 | 127 | 4,424 | 111 | 40 | |
| | | | 6,655 | 112 | 6,987 | 123 | 6,346 | 106 | 60 | |
| | | | 7,915 | 110 | 8,387 | 121 | 7,617 | 106 | 72 | |

| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| WSPSL | 60LED | 83 | 6,513 | 112 | 6,513 | 112 | 6,635 | 113 | 7,401 | 128 | 58 | 250W MH |
| | 80LED | 83 | 8,060 | 106 | 8,060 | 106 | 8,396 | 108 | 9,332 | 122 | 76 | 400W MH |

Scan QR code above for ordering format and more detailed information

CONTRACTOR'S
CORNER

SLIMPAK PRO/WALL PACK PRO SERIES - EASY INSTALL



INSTALLATION VIDEO
Scan to view



INSTALLATION VIDEO
Scan to view

Origin Series Slim LED Wall Light



FULLY SELECTABLE
- ✨+ LUMEN • CCT 🌈



- Quick and easy installation saves time and money
- Adjustable 0° - 90°
- Origin products are backed by the same US-based customer service



| HOUSING | UNIT | CRI | SELECTABLE 3000K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| ORSWPSEL | 2-4L | >80 | 1,875 | 125 | 2,100 | 140 | 2,025 | 135 | 15 | 175W MH |
| | | | 2,500 | 125 | 2,800 | 140 | 2,700 | 135 | 20 | |
| | | | 3,750 | 125 | 4,200 | 140 | 4,050 | 135 | 30 | |

Wall Pack Pro Series Small LED Wall Light



- Quick and easy installation saves time and money
- Smooth and even light distribution eliminates glare
- External airflow fins help to dissipate heat



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| WPS | 13LED | 80 | 1,629 | 121 | 1,629 | 121 | 1,629 | 121 | 1,682 | 124 | 14 | 70W MH |
| | 27LED | 80 | 3,132 | 114 | 3,132 | 114 | 3,132 | 114 | 3,261 | 118 | 28 | 100W MH |

Scan QR code above for ordering format and more detailed information

Wall Pack Pro Series Medium LED Wall Light



- Quick and easy installation saves time and money
- Smooth and even light distribution eliminates glare
- External airflow fins help to dissipate heat



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| WPM | 43LED | 80 | 5,025 | 116 | 5,025 | 116 | 5,025 | 116 | 5,229 | 121 | 43 | 175W MH |
| | 64LED | 80 | 6,983 | 114 | 6,983 | 114 | 6,983 | 114 | 7,237 | 118 | 61 | 400W MH |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Security Dusk to Dawn

FULLY SELECTABLE
- ☀️ + LUMEN • CCT 🌙



- Replace 9 standard fixtures with just 1
- Polycarbonate lens creates a smooth, glare-free light
- Features a replaceable button photocontrol



| HOUSING | UNIT | CRI | SELECTABLE 3000K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| DDS | 3-8L | 70 | 2412 | 134 | 2772 | 154 | 2502 | 139 | 18 | 175W MV |
| | | | 4690 | 134 | 5390 | 154 | 4865 | 139 | 35 | |
| | | | 7451 | 134 | 8236 | 154 | 7726 | 139 | 56 | |

Classic Vandal Light

FULLY SELECTABLE
- ☀️ + LUMEN • CCT 🌙



- Replace 9 vandal resistant lights with just 1
- Die-cast aluminum housing
- Traditional fixture designs provide a familiar look.



| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|-------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| VN8S | 2-4L | 80 | 2,247 | 122 | 2,382 | 129 | 2,322 | 126 | 18 | 175W MH |
| | | | 3,307 | 122 | 3,505 | 129 | 3,418 | 126 | 27 | |
| | | | 4,309 | 117 | 4,567 | 129 | 4,453 | 121 | 36 | |
| VN12S | 5-10L | 80 | 5,507 | 137 | 5,746 | 143 | 5,526 | 137 | 40 | 400W MH |
| | | | 8,123 | 135 | 8,475 | 141 | 8,150 | 136 | 60 | |
| | | | 10,650 | 130 | 11,112 | 141 | 10,686 | 131 | 82 | |

Low Profile Parking Garage Light



- Slim, low-profile fixture is less than 5" tall
- Hinged design allows for easy installation
- Optics designed for parking garage applications



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| PGM | 25LED | 83 | 3,387 | 138 | 3,387 | 138 | 3,387 | 138 | 3,524 | 144 | 25 | 100W MH |
| | 40LED | 83 | 5,528 | 134 | 5,528 | 134 | 5,528 | 134 | 5,717 | 138 | 42 | 175W MH |
| | 60LED | 83 | 7,693 | 130 | 7,693 | 130 | 7,693 | 130 | 7,898 | 131 | 60 | 250W MH |
| | 80LED | 83 | 9,830 | 124 | 9,830 | 124 | 9,830 | 124 | 10,030 | 124 | 81 | 400W MH |

Scan QR code above for ordering format and more detailed information

CONTRACTOR'S
CORNER

LOW PROFILE CANOPY - EASY INSTALL



INSTALLATION VIDEO
Scan to view



INSTALLATION VIDEO
Scan to view

Low Profile Canopy Light

FULLY SELECTABLE
-☀️+ LUMEN • CCT



- Slim, low-profile fixture is less than 5" tall
- Hinged design allows for easy installation
- Lens produces a smooth, uniform and even light



| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO | | |
|-------------------|-------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | | | |
| SELECTABLE | | | | | | | | | | | | |
| CPMS | 3-12L | 80 | 3,217 | 141 | 3,323 | 145 | 3,213 | 140 | 23 | 100W - 400W MH | | |
| | | | 6,797 | 147 | 7,020 | 152 | 6,788 | 147 | 46 | | | |
| | | | 9,867 | 145 | 10,190 | 149 | 9,854 | 145 | 68 | | | |
| | | | 11,621 | 142 | 12,002 | 153 | 11,606 | 142 | 82 | | | |
| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | |
| CPM | 25LED | 83 | 3,363 | 137 | 3,363 | 137 | 3,363 | 137 | 3,492 | 142 | 25 | 100W MH |
| | 40LED | 83 | 5,452 | 135 | 5,452 | 135 | 5,401 | 133 | 5,626 | 135 | 42 | 175W MH |
| | 60LED | 83 | 7,680 | 127 | 7,680 | 127 | 7,514 | 127 | 7,788 | 129 | 60 | 250W MH |
| | 80LED | 83 | 9,691 | 122 | 9,691 | 122 | 9,691 | 122 | 9,821 | 121 | 81 | 400W MH |

Independence Series Low Profile Canopy Light



- Slim, low-profile fixture is less than 4" tall
- Heavy duty die-cast aluminum housing
- Smooth light distribution pattern with low glare



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| LPC | 5L | 80 | 5,100 | 143 | 5,100 | 143 | 5,101 | 143 | 36 | 175W MH |
| | 7L | 80 | 7,030 | 134 | 7,001 | 134 | 7,001 | 134 | 52 | 250W MH |

Origin Series LED Canopy Light



- Slim, low-profile fixture is less than 4" tall
- Durable, die-cast aluminum housing
- Origin products are backed by the same US-based customer service



| HOUSING | UNIT | CRI | 4000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORC | 5L | 70 | 4,630 | 127 | 36 | 175W MH |

Scan QR code above for more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Classic Series Small LED Flood Light

OPTIC | EXTRA-WIDE



- Smooth, even and uniform light pattern
- More Footcandles Delivered to the Target
- Less Glare and Wasted Light



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| PFS | 22LED | 70 | 1,978 | 93 | 1,978 | 93 | 1,978 | 93 | 2,194 | 103 | 21 | 100W MH |
| PFSXW | 27LED | 80 | 3,132 | 114 | 3,132 | 114 | 3,132 | 114 | 3,261 | 118 | 28 | 100W MH |

Scan QR code above for ordering format and more detailed information

Classic Series Medium LED Flood Light

OPTIC | EXTRA-WIDE



- Smooth, even and uniform light pattern
- More Footcandles Delivered to the Target
- Less Glare and Wasted Light



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| PFM | 43LED | 70 | 4,010 | 97 | 4,010 | 97 | 4,010 | 97 | 4,343 | 105 | 41 | 175W MH |
| PFMXW | 43LED | 80 | 5,025 | 116 | 5,025 | 116 | 5,025 | 116 | 5,229 | 121 | 43 | 175W MH |
| PFMXW | 64LED | 80 | 6,983 | 114 | 6,983 | 114 | 6,983 | 114 | 7,237 | 118 | 64 | 250W MH |

Scan QR code above for ordering format and more detailed information

HAWK SERIES - SELECTABLE



**CHANGE AT THE
FLIP OF A SWITCH**

Easy Access
Individual dip switches allow users to select color temperature and light output.



PRODUCT VIDEO
Scan to view

Hawk Series Medium LED Flood Light

OPTIC | EXTRA-WIDE

FULLY SELECTABLE
-☀️+ LUMEN • CCT 🌈



- Heavy Duty Knuckle and Slipfitter/Trunnion Predator Mount Available
- Compact: 40% Smaller
- Selectable Flood: Reduce from 9 fixtures to 1



| HOUSING | UNIT | CRI | SELECTABLE 3000K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|--------------------------|-------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| HSXP (NEMA 6x6 optic) | 8-16L | 70 | 8,445 | 137 | 9,178 | 149 | 8,749 | 142 | 62 | 400W MH |
| | | | 12,144 | 130 | 13,198 | 141 | 12,581 | 135 | 93 | |
| | | | 15,170 | 120 | 16,487 | 138 | 15,716 | 124 | 127 | |
| HSXW (extra wide) | 8-16L | 70 | 9,052 | 146 | 9,945 | 161 | 9,322 | 151 | 62 | 400W MH |
| | | | 13,166 | 141 | 14,465 | 155 | 13,559 | 145 | 94 | |
| | | | 16,551 | 131 | 18,184 | 152 | 17,045 | 135 | 126 | |

| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|--------------------------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | |
| HXP6 (NEMA 6x6 optic) | 8L | 70 | 8,654 | 140 | 9,047 | 146 | 8,871 | 143 | 8,871 | 143 | 62 | 400W MH |
| | 12L | 70 | 12,224 | 130 | 12,779 | 136 | 12,530 | 133 | 12,530 | 133 | 94 | |
| | 16L | 70 | 15,010 | 119 | 15,691 | 127 | 15,386 | 127 | 15,386 | 127 | 126 | |
| HXW (extra wide) | 8L | 70 | 9,267 | 150 | 9,711 | 157 | 9,267 | 150 | 9,366 | 152 | 62 | 400W MH |
| | 12L | 70 | 12,991 | 139 | 13,613 | 145 | 12,991 | 139 | 13,129 | 140 | 94 | |
| | 16L | 70 | 16,456 | 130 | 17,244 | 137 | 16,456 | 130 | 16,631 | 132 | 126 | |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Classic Series Large LED Flood Light

OPTIC | EXTRA-WIDE



- Less Glare and Wasted Light
- Attractive architectural styling
- Smooth, even and uniform light pattern



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|----------------------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| PFL2GH (optic) | 20L | 70 | 20,200 | 142 | 21,338 | 150 | 21,338 | 150 | 21,534 | 152 | 142 | 400W MH |
| | 25L | 70 | 24,840 | 138 | 26,240 | 147 | 26,240 | 147 | 26,480 | 148 | 180 | 1000W MH |
| PFL2GXW (extra wide) | 20L | 70 | 20,540 | 144 | 20,540 | 144 | 20,540 | 144 | 11,140 | 153 | 142 | 400W MH |
| | 25L | 70 | 25,040 | 139 | 25,040 | 139 | 25,040 | 139 | 25,040 | 139 | 180 | 1000W MH |

Scan QR code above for ordering format and more detailed information

Classic Series Extra Large LED Flood Light

OPTIC | EXTRA-WIDE



LUMEN SELECTABLE



- Less Glare and Wasted Light
- Attractive architectural styling
- Smooth, even and uniform light pattern



| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|------------------------------------|--------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | | | |
| PFXL2GH (optic) LUMEN SEL | 26-50L | 70 | 24,332 | 144 | 25,582 | 152 | 25,437 | 151 | 25,353 | 150 | 169 | 1000W MH |
| | | | 36,518 | 141 | 38,394 | 148 | 38,176 | 148 | 38,051 | 147 | 259 | |
| | | | 47,818 | 133 | 50,275 | 139 | 49,989 | 138 | 49,825 | 138 | 361 | |
| PFXL2GXW (extra wide) FULLY SEL | 26-50L | 70 | - | - | 28,506 | 160 | 29,756 | 167 | 27,941 | 157 | 178 | 1000W MH |
| | | | - | - | 42,003 | 151 | 43,845 | 158 | 41,170 | 148 | 278 | |
| | | | - | - | 52,133 | 143 | 54,419 | 156 | 51,099 | 140 | 366 | |

| HOUSING | UNIT | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|-----------------------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | |
| PFXL2GH (optic) | 33L | 70 | 31190 | 151 | 32849 | 151 | 32849 | 151 | 33408 | 151 | 219 | 1000W MH |
| | 40L | 70 | 37020 | 139 | 38989 | 147 | 38989 | 147 | 39653 | 149 | 266 | |
| | 50L | 70 | 47390 | 132 | 49910 | 141 | 49910 | 141 | 50760 | 142 | 355 | |
| PFXL2GXW (extra wide) | 33L | 70 | 33210 | 151 | 33210 | 151 | 33210 | 151 | 33210 | 151 | 220 | 1000W MH |
| | 40L | 70 | 39430 | 148 | 39430 | 148 | 39430 | 148 | 39430 | 148 | 267 | |
| | 50L | 70 | 50130 | 141 | 50130 | 141 | 50130 | 141 | 50130 | 141 | 357 | |

Scan QR code above for ordering format and more detailed information

CLASSIC/INDEPENDENCE SERIES FLOOD LIGHTS



PRODUCT VIDEO
Scan to view



PRODUCT VIDEO
Scan to view

Independence Series Small LED Flood Light



- Slim die-cast aluminum housing
- NEMA 6×6 light distribution pattern
- Mounting options include both Knuckle and Trunnion



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FS | 3L | 80 | 3,644 | 129 | 3,463 | 127 | 3,463 | 127 | 28 | 100W MH |
| | 6L | 80 | 5,992 | 123 | 5,765 | 121 | 5,765 | 121 | 49 | 175W MH |

Scan QR code above for ordering format and more detailed information

Independence Series Medium LED Flood Light



- Slim die-cast aluminum housing
- NEMA 6×6 light distribution pattern
- Mounting options include both Knuckle and Trunnion



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FM | 8L | 80 | 8,850 | 126 | 8,775 | 128 | 8,775 | 128 | 70 | 400W MH |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.





Origin Series Selectable Flood Light

SMALL | MEDIUM | LARGE



FULLY SELECTABLE
-☀️+ LUMEN • CCT



- Selectable lumens and CCT
- Selectable photocontrol included
- Multi-Mount - Knuckle/Trunnion or Slipfitter/Trunnion in carton
- Origin products are backed by the same US-based customer service



| HOUSING | UNIT | CRI | SELECTABLE 3000K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|--------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SSF | 2-5L | 80 | 2,237 | 144 | 2,351 | 158 | 2,359 | 156 | 15 | 100W MH |
| | | | 3,497 | 136 | 3,814 | 153 | 3,788 | 146 | 26 | 100W MH |
| | | | 4,785 | 126 | 5,425 | 143 | 5,168 | 137 | 38 | 175W MH |
| SMF | 5-12L | 80 | 5,567 | 151 | 5,883 | 165 | 5,966 | 163 | 37 | 175W MH |
| | | | 8,714 | 141 | 9,327 | 158 | 9,276 | 152 | 62 | 175W MH |
| | | | 10,833 | 128 | 12,007 | 148 | 11,325 | 139 | 84 | 250W MH |
| SLF | 10-20L | 80 | 10,495 | 143 | 11,082 | 159 | 11,100 | 154 | 83 | 250W/400W MH |
| | | | 14,075 | 137 | 15,154 | 155 | 14,985 | 148 | 102 | 400W MH |
| | | | 18,484 | 129 | 20,015 | 147 | 18,706 | 134 | 140 | 400W MH |

Scan QR code above for more detailed information



Origin Series Motion Security Light



FULLY SELECTABLE
-☀️+ LUMEN • CCT



- Two adjustable LED heads provide high light output
- Detects motion in a wide 240° pattern
- Origin products are backed by the same US-based customer service

| HOUSING | UNIT | CRI | SELECTABLE 3000K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE |
|---------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | |
| ORMSSEL | 1-3L | >80 | 2,200 | 122 | 2,350 | 131 | 2,300 | 127 | 18 |
| | | | 3,025 | 121 | 3,250 | 130 | 3,150 | 126 | 25 |

Scan QR code above for more detailed information

4X4 SELECTABLE FLOODS MULTI-MOUNT



Origin Series Motion Security Light



- Two adjustable LED heads provide high light output
- Detects motion in a wide 240° pattern
- Origin products are backed by the same US-based customer service

| HOUSING | UNIT | CRI | 4000K CCT | | WATTAGE |
|---------|------|-----|------------------|----------------|---------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | |
| ORMS | 2L | 80 | 2,042 | 97 | 24 |

Scan QR code above for more detailed information

Origin Series Selectable Bullet Flood Light SMALL | LARGE



FULLY SELECTABLE
-☀+ LUMEN • CCT



- Energy-efficient design saves money on energy costs
- Die-cast aluminum housing dissipates heat
- Origin products are backed by the same US-based customer service

| HOUSING | UNIT | CRI | SELECTABLE 3000K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | |
| ORBSEL | 1-3L | 80+ | 1,268 | 134 | 1,379 | 148 | 1,316 | 137 | 9 | 100W MH |
| | | | 2,195 | 133 | 2,386 | 148 | 2,277 | 137 | 16 | |
| | | | 3,061 | 131 | 3,327 | 145 | 3,176 | 135 | 24 | |

Scan QR code above for more detailed information

Origin Series Bullet Flood Light LARGE



- Energy-efficient design saves money on energy costs
- Die-cast aluminum housing dissipates heat
- Origin products are backed by the same US-based customer service

| HOUSING | UNIT | CRI | 4000K CCT | | WATTAGE | REPLACES UP TO |
|--------------|------|-----|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | |
| ORLB | 2L | 70 | 2,047 | 105 | 20 | 100W |

Scan QR code above for more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Patriot Series LED Sports Light



- Rugged die cast aluminum housing
- Separate driver compartment to extend life
- Precision optics achieve higher light output



| UNIT | WEIGHT | EPA | DISTRIBUTION | CRI | 4000K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-----------|-----|--------------|-----|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SPT70L | 37.5 lbs. | 1.3 | 2x2 | 70 | 62,952 | 141 | 62,952 | 141 | 450W | 1000W MH |
| | | | 3x3 | 70 | 70,922 | 157 | 70,922 | 157 | | |
| | | | 4x4 | 70 | 71,276 | 157 | 71,276 | 157 | | |
| | | | 5x5 | 70 | 69,158 | 154 | 69,158 | 154 | | |
| SPT85L | 38.6 lbs. | 1.3 | 2x2 | 70 | 71,599 | 133 | 71,599 | 133 | 550W | 1500W MH |
| | | | 3x3 | 70 | 84,569 | 154 | 84,569 | 154 | | |
| | | | 4x4 | 70 | 83,982 | 156 | 83,982 | 156 | | |
| | | | 5x5 | 70 | 82,674 | 150 | 82,674 | 150 | | |
| SPT105L | 42 lbs. | 1.3 | 2x2 | 70 | 90,443 | 125 | 90,443 | 125 | 750W | - |
| | | | 3x3 | 70 | 106,230 | 144 | 106,230 | 144 | | |
| | | | 4x4 | 70 | 106,410 | 144 | 106,410 | 144 | | |
| | | | 5x5 | 70 | 107,000 | 145 | 107,000 | 145 | | |

Scan QR code above for ordering format and more detailed information

Accessories



| PART NUMBER | DESCRIPTION | FINISH | STD. PKG. |
|-------------|--------------------|--------|-----------|
| SPT-LZR | Laser Sight | Black | 1 |
| SPT-GS | Glare Shield Visor | Black | 1 |
| 320-200 | Tenon Mount | Black | 1 |

PATRIOT SERIES



EASY ADJUSTMENTS
Scan to view

Constitution Series LED Roadway Light



- Less Glare and Wasted Light
- Attractive architectural styling
- Smooth, even and uniform light pattern



| HOUSING | UNIT | DISTRIBUTION | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|--------------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| RW | 8L | Type II | 70 | 7,615 | 154 | 7,509 | 152 | 7,572 | 154 | 49 | 175W MH |
| | | Type III | 70 | 8,193 | 132 | - | - | 8,238 | 130 | 64 | |
| | | FT | 70 | 7,387 | 150 | 7,345 | 149 | 7,326 | 148 | 49 | |
| | | Type V | 70 | 7,632 | 155 | 7,588 | 154 | 7,526 | 153 | 49 | |
| RW | 14L | Type II | 70 | 13,289 | 146 | 13,079 | 144 | 12,872 | 142 | 91 | 250W MH |
| | | Type III | 70 | 13,850 | 116 | - | - | 14,070 | 115 | 122 | |
| | | FT | 70 | 13,007 | 143 | 12,801 | 141 | 12,807 | 141 | 98 | |
| | | Type V | 70 | 13,315 | 147 | 13,110 | 144 | 12,908 | 142 | 91 | |
| RW | 23L | Type III | 70 | 22,230 | 119 | - | - | 22,360 | 120 | 187 | 400W MH |

Scan QR code above for ordering format and more detailed information

Bollard



- Full proof aluminum construction provides both corrosion and vandal resistance
- Solid foundation and components withstand the elements and poor conditions

| HOUSING | UNIT | CRI | 4000K CCT | | 5000K CCT | | WATTAGE |
|---------|-------|-----|------------------|----------------|------------------|----------------|---------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | |
| BL | 18LED | 70 | 2,035 | 111 | 2,035 | 111 | 18 |
| | 36LED | 70 | 3,960 | 110 | 3,960 | 110 | 36 |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Origin Series LED Area Light



LUMEN SELECTABLE
-☀️+



- Multi-Mount Bracket Included
- Offers 180° of mounting angle adjustment.
- Both Type III and Type V optics are included in the box.



| HOUSING | UNIT | DISTRIBUTION | CRI | 4000K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|--------|--------------|-----|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORALSEL | 12-24L | T3 | 80 | 8,347 | 155 | 7,928 | 147 | 54 | 175W MH |
| | | T5 | 80 | 8,241 | 153 | 8,124 | 150 | | |
| | | T3 | 80 | 11,651 | 149 | 11,067 | 142 | 78 | 175W MH |
| | | T5 | 80 | 11,503 | 147 | 11,339 | 145 | | |
| | | T3 | 80 | 14,845 | 143 | 14,101 | 136 | 104 | 250W MH |
| | | T5 | 80 | 14,656 | 141 | 14,447 | 139 | | |
| | | T3 | 80 | 17,253 | 136 | 16,388 | 129 | 127 | 400W MH |
| | | T5 | 80 | 17,033 | 134 | 16,790 | 132 | | |
| T3 | 80 | 19,701 | 129 | 18,713 | 122 | 153 | 400W MH | | |
| T5 | 80 | 19,451 | 127 | 19,173 | 125 | | | | |

Scan QR code above for ordering format and more detailed information

Origin Series LED Area Light



FULLY SELECTABLE
-☀️+ LUMEN • CCT



- Multi-Mount Bracket Included
- Offers 180° of mounting angle adjustment.
- Both Type III and Type V optics are included in the box.



| HOUSING | UNIT | DISTRIBUTION | CRI | 3000K CCT | | 4000K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|--------|--------------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORASEL | 15-22L | T3 | 70 | 14,836 | 146 | 15,306 | 155 | 15,415 | 152 | 100 | 250W |
| | | T5 | 70 | 15,390 | 152 | 15,908 | 159 | 16,104 | 157 | | |
| | | T3 | 70 | 17,526 | 142 | 18,130 | 152 | 18,076 | 148 | 120 | 400W |
| | | T5 | 70 | 17,979 | 148 | 18,670 | 157 | 18,817 | 153 | | |
| | | T3 | 70 | 20,834 | 138 | 21,551 | 148 | 21,347 | 142 | 150 | 400W |
| | | T5 | 70 | 22,349 | 142 | 23,287 | 152 | 23,205 | 145 | | |
| | 30-43L | T3 | 70 | 30,197 | 148 | 31,993 | 161 | 32,486 | 159 | 200 | 400W |
| | | T5 | 70 | 30,514 | 152 | 32,318 | 164 | 32,996 | 163 | | |
| | | T3 | 70 | 35,331 | 143 | 37,689 | 157 | 38,238 | 154 | 240 | 1000W |
| | | T5 | 70 | 35,439 | 148 | 37,746 | 161 | 38,414 | 158 | | |
| | | T3 | 70 | 41,560 | 138 | 44,839 | 154 | 45,503 | 151 | 300 | 1000W |
| | | T5 | 70 | 43,145 | 143 | 45,695 | 157 | 46,111 | 152 | | |

Scan QR code above for ordering format and more detailed information

ORIGIN SERIES SELECTABLE AREA LIGHTS



SNAP-TIGHT MAGNETIC OPTIC SYSTEM
Scan to view video

Eagles Series Small LED Area Light



LUMEN SELECTABLE



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



| HOUSING | UNIT | DISTRIBUTION | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|-------|--------------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | | |
| SLPSS | 6-12L | T2 | 70 | 6,036 | 143 | 6,036 | 143 | 6,036 | 143 | 42 | 175W MH |
| | | FT | 70 | 5,899 | 140 | 5,859 | 139 | 5,859 | 139 | | |
| | | T5 | 70 | 5,812 | 138 | 5,812 | 138 | 5,812 | 138 | | |
| | | T2 | 70 | 8,946 | 142 | 8,946 | 142 | 8,946 | 142 | 63 | 175W MH |
| | | FT | 70 | 8,743 | 138 | 8,684 | 137 | 8,684 | 137 | | |
| | | T5 | 70 | 8,614 | 136 | 8,614 | 136 | 8,614 | 136 | | |
| | | T2 | 70 | 11,755 | 137 | 11,755 | 137 | 11,755 | 137 | 86 | 250W MH |
| | | FT | 70 | 11,488 | 134 | 11,410 | 133 | 11,410 | 133 | | |
| T5 | 70 | 11,319 | 132 | 11,319 | 132 | 11,319 | 132 | | | | |

| HOUSING | UNIT | DISTRIBUTION | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|--------------|------|--------------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | |
| SLPS | 6L | T2 | 70 | 6,297 | 154 | 6,288 | 153 | 6,288 | 153 | 41 | 175W MH |
| | | FT | 70 | 6,005 | 146 | 5,839 | 144 | 5,839 | 144 | | |
| | | T5 | 70 | 6,025 | 147 | 6,016 | 147 | 6,016 | 147 | | |
| | 9L | T2 | 70 | 9,041 | 144 | 8,859 | 142 | 8,859 | 142 | 63 | 175W MH |
| | | FT | 70 | 8,717 | 139 | 8,541 | 136 | 8,541 | 136 | | |
| | | T5 | 70 | 8,639 | 138 | 8,465 | 135 | 8,465 | 135 | | |
| | 12L | T2 | 70 | 12,028 | 136 | 11,822 | 133 | 11,822 | 133 | 89 | 250W MH |
| | | FT | 70 | 11,417 | 129 | 11,222 | 127 | 11,222 | 127 | | |
| | | T5 | 70 | 11,578 | 131 | 11,380 | 129 | 11,380 | 129 | | |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Eagles Series Medium LED Area Light



LUMEN SELECTABLE
-☀+



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



| HOUSING | UNIT | DISTRIBUTION | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|--------|--------------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | | | | |
| SLPMS | 12-24L | T2 | 70 | 12,646 | 160 | 12,646 | 160 | 12,646 | 160 | 13,434 | 170 | 79 | 250W MH |
| | | T3 | 70 | 25,220 | 148 | 12,646 | 160 | 12,646 | 160 | 13,508 | 171 | | |
| | | FT | 70 | 12,646 | 160 | 12,646 | 160 | 12,646 | 160 | 13,278 | 168 | | |
| | | T5 | 70 | 12,646 | 160 | 12,646 | 160 | 12,646 | 160 | 13,541 | 172 | | |
| | | T2 | 70 | 18,707 | 151 | 18,707 | 151 | 18,707 | 151 | 19,872 | 161 | 124 | 400W MH |
| | | T3 | 70 | 18,707 | 151 | 18,707 | 151 | 18,707 | 151 | 19,982 | 161 | | |
| | | FT | 70 | 18,707 | 151 | 18,707 | 151 | 18,707 | 151 | 19,642 | 159 | | |
| | | T5 | 70 | 18,707 | 151 | 18,707 | 151 | 18,707 | 151 | 20,032 | 162 | | |
| | | T2 | 70 | 23,741 | 141 | 23,741 | 141 | 23,741 | 141 | 25,220 | 148 | 171 | 400W MH |
| | | T3 | 70 | 23,741 | 141 | 23,741 | 141 | 23,741 | 141 | 25,359 | 149 | | |
| | | FT | 70 | 23,741 | 141 | 23,741 | 141 | 23,741 | 141 | 24,928 | 146 | | |
| | | T5 | 70 | 23,741 | 141 | 23,741 | 141 | 23,741 | 141 | 25,422 | 149 | | |
| | 25-50L | T2 | 70 | 26536 | 168 | 26054 | 165 | 26526 | 168 | 13,434 | 170 | 158 | 400W MH |
| | | T3 | 70 | 26535 | 168 | 26052 | 165 | 26524 | 168 | 13,508 | 171 | | |
| | | FT | 70 | 25884 | 164 | 25414 | 161 | 25874 | 164 | 13,278 | 168 | | |
| | | T5 | 70 | 26448 | 167 | 25967 | 164 | 26438 | 167 | 13,541 | 172 | | |
| | | T2 | 70 | 38675 | 158 | 37972 | 155 | 38659 | 158 | 19,872 | 161 | 245 | 1000W MH |
| | | T3 | 70 | 38672 | 158 | 37969 | 155 | 38656 | 158 | 19,982 | 161 | | |
| | | FT | 70 | 37725 | 154 | 37039 | 151 | 37709 | 154 | 19,642 | 159 | | |
| | | T5 | 70 | 38546 | 157 | 37846 | 154 | 38531 | 157 | 20,032 | 162 | | |
| | | T2 | 70 | 48164 | 145 | 47289 | 142 | 48145 | 145 | 25,220 | 148 | 332 | 1000W MH |
| | | T3 | 70 | 48161 | 145 | 47285 | 142 | 48141 | 145 | 25,359 | 149 | | |
| | | FT | 70 | 46981 | 142 | 46127 | 139 | 46962 | 141 | 24,928 | 146 | | |
| | | T5 | 70 | 48004 | 145 | 47132 | 142 | 47985 | 145 | 25,422 | 149 | | |

Scan QR code above for ordering format and more detailed information

EAGLE SERIES



QUICK & EASY INSTALLATION
Scan to view installation video



CASE STUDIES
Scan to view



Eagles Series Medium LED Area Light



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



| HOUSING | UNIT | DISTRIBUTION | CRI | 3000K CCT | | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|--------------|------|--------------|-----|------------------|----------------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | | | |
| SLPM | 6L | T2 | 70 | 5,908 | 153 | 6,067 | 158 | 6,093 | 159 | 6,152 | 160 | 39 | 175W MH |
| | | T3 | 70 | 5,824 | 151 | 5,981 | 155 | 6,006 | 155 | 6,065 | 157 | | |
| | | FT | 70 | 5,712 | 148 | 5,866 | 152 | 5,891 | 153 | 5,948 | 154 | | |
| | | T5 | 70 | 5,848 | 152 | 6,005 | 156 | 6,031 | 156 | 6,090 | 158 | | |
| | 9L | T2 | 70 | 9,155 | 159 | 9,401 | 163 | 9,442 | 164 | 9,533 | 166 | 58 | 175W MH |
| | | T3 | 70 | 9,082 | 158 | 9,326 | 162 | 9,366 | 163 | 9,457 | 164 | | |
| | | FT | 70 | 8,866 | 154 | 9,104 | 158 | 9,144 | 159 | 9,232 | 160 | | |
| | | T5 | 70 | 9,086 | 158 | 9,330 | 162 | 9,370 | 163 | 9,461 | 164 | | |
| | 12L | T2 | 70 | 12,030 | 160 | 12,354 | 164 | 12,407 | 165 | 12,527 | 167 | 75 | 250W MH |
| | | T3 | 70 | 11,900 | 159 | 12,220 | 163 | 12,272 | 164 | 12,391 | 165 | | |
| | | FT | 70 | 11,670 | 156 | 11,984 | 160 | 12,035 | 160 | 12,152 | 162 | | |
| | | T5 | 70 | 11,950 | 159 | 12,271 | 164 | 12,324 | 164 | 12,444 | 166 | | |
| | 18L | T2 | 70 | 19506 | 160 | 18509 | 152 | 18509 | 152 | 18,577 | 162 | 122 | 400W MH |
| | | T3 | 70 | 19489 | 160 | 18493 | 152 | 18493 | 152 | 18,546 | 161 | | |
| | | FT | 70 | 19182 | 157 | 18201 | 149 | 18201 | 149 | 18,056 | 157 | | |
| | | T5 | 70 | 19650 | 161 | 18645 | 153 | 18645 | 154 | 18,556 | 161 | | |
| | 24L | T2 | 70 | 25447 | 149 | 24146 | 141 | 24146 | 141 | 24,616 | 154 | 171 | 400W MH |
| | | T3 | 70 | 25425 | 149 | 24125 | 141 | 24125 | 141 | 24,596 | 154 | | |
| | | FT | 70 | 25025 | 146 | 23745 | 139 | 23745 | 139 | 23,981 | 150 | | |
| | | T5 | 70 | 25635 | 150 | 24324 | 142 | 24324 | 142 | 24,637 | 154 | | |
| | 30L | T2 | 70 | 29,450 | 140 | 30,242 | 144 | 30,372 | 145 | 30,666 | 146 | 210 | 750W MH |
| | | T3 | 70 | 29,440 | 140 | 30,232 | 144 | 30,361 | 145 | 30,656 | 146 | | |
| | | FT | 70 | 28,750 | 137 | 29,523 | 141 | 29,650 | 141 | 29,937 | 143 | | |
| | | T5 | 70 | 29,470 | 141 | 30,263 | 144 | 30,392 | 145 | 30,687 | 146 | | |
| | 36L | T2 | 70 | 35,260 | 133 | 36,208 | 137 | 36,364 | 137 | 36,716 | 139 | 265 | 1000W MH |
| | | T3 | 70 | 35,220 | 133 | 36,167 | 137 | 36,322 | 137 | 36,675 | 139 | | |
| | | FT | 70 | 34,490 | 131 | 35,418 | 134 | 35,570 | 135 | 35,914 | 136 | | |
| | | T5 | 70 | 35,200 | 133 | 36,147 | 137 | 36,302 | 137 | 36,654 | 139 | | |
| | 43L | T2 | 70 | 42,200 | 121 | 43,335 | 124 | 43,521 | 125 | 43,943 | 126 | 348 | 1000W MH |
| | | T3 | 70 | 41,940 | 120 | 43,068 | 124 | 43,253 | 124 | 43,672 | 125 | | |
| | | FT | 70 | 41,300 | 118 | 42,411 | 122 | 42,593 | 122 | 43,006 | 123 | | |
| | | T5 | 70 | 41,970 | 120 | 43,099 | 124 | 43,284 | 124 | 43,703 | 125 | | |
| | 50L | T2 | 70 | n/a | n/a | 48821 | 147 | 47962 | 144 | 47962 | 144 | 333 | 1000W MH |
| | | T3 | 70 | n/a | n/a | 49190 | 148 | 48324 | 145 | 48324 | 145 | | |
| | | FT | 70 | n/a | n/a | 47891 | 144 | 47048 | 142 | 47048 | 142 | | |
| | | T5 | 70 | n/a | n/a | 49524 | 149 | 48652 | 146 | 48652 | 146 | | |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.





Flood Lighting Brackets

HID | LED

Bullhorn Brackets

| | CATALOG# | DESCRIPTION | FINISH | WT/LBS. |
|--|-----------|--------------------|--------|---------|
| | 500-011BZ | 2 In Line Bullhorn | Bronze | 20 |
| | 500-012BZ | 3 In Line Bullhorn | Bronze | 31 |
| | 500-052BZ | 3 @ 120° Bullhorn | Bronze | 33 |
| | 500-022BZ | 4 @ 90° Bullhorn | Bronze | 43 |

Side Mount Brackets

| | CATALOG# | DESCRIPTION | FINISH |
|--|-----------|--------------------------------|------------|
| | 500-018BZ | Right Angle Bracket (for Wall) | Bronze |
| | 500-050BZ | Right Angle Bracket (for Pole) | Bronze |
| | 500-054BZ | 4" Side Tenon Mount Bracket | Bronze |
| | 500-055BZ | 8" Side Tenon Mount Bracket | Bronze |
| | 500-060G | Side Angle Bracket | Galvanized |

RSR Brackets

| | CATALOG# | DESCRIPTION | FINISH | WT/LBS. |
|--|-----------|-----------------------|--------|---------|
| | 500-015BZ | 2 In Line RSR Bracket | Bronze | 20 |
| | 500-053BZ | 4 In Line RSR Bracket | Bronze | 37 |

Miscellaneous Brackets

| | CATALOG# | DESCRIPTION | FINISH |
|--|-----------|--------------------------------------|------------|
| | 500-006G* | Steel Cross Arm Bracket | Galvanized |
| | 500-007G* | Single Flood Light Bracket | Galvanized |
| | 500-082BZ | Post-Top Fitter for Knuckle | Bronze |
| | 320-035BZ | Slipfitter for Trunnion Mount | Bronze |
| | 280-032 | Adjustable Post Top Fitter | Bronze |
| | 320-200 | Tenon Mount for SPT | Black |
| | 500-009BZ | 4" Drop In Tenon | Bronze |
| | 500-010BZ | 5" Drop In Tenon | Bronze |
| | 500-066BZ | 6" Drop In Tenon | Bronze |
| | 500-063BZ | 4-1/4" Tenon Adapter for Round Poles | Bronze |
| | 500-008BZ | 3-1/4" Tenon Adapter for Round Poles | Bronze |

*For Wood Pole Mount Only

Scan QR code above for more detailed information



Sports Lighting Brackets

LED


Metal & Wood Pole Brackets

| | CATALOG# | DESCRIPTION | FINISH | WT/LBS. |
|--|----------|-----------------|------------|---------|
| | 500-001G | 2 Light Bracket | Galvanized | 1 |
| | 500-002G | 3 Light Bracket | Galvanized | 1 |
| | 500-003G | 4 Light Bracket | Galvanized | 1 |

| | CATALOG# | DESCRIPTION | FINISH | WT/LBS. |
|--|----------|-----------------|------------|---------|
| | 500-004G | 5 Light Bracket | Galvanized | 1 |
| | 500-005G | 6 Light Bracket | Galvanized | 1 |

Scan QR code above for more detailed information

UNIVERSAL BRACKET SYSTEM



Scan to view video



CASE STUDIES
Scan to view






Area Lighting Universal Bracket System


FITS ANY POLE

Round Pole Adapter

| | CATALOG# | DESCRIPTION | FINISH |
|---|-------------|--------------------|--------|
|  | 500-SLPMRPA | Round Pole Bracket | Bronze |


Mounting Cleat Included with Fixture

Square Pole Tenon Adapter - Up to 4 @ 90°

| | CATALOG# | DESCRIPTION | FINISH |
|---|-----------|---------------------------|--------|
|  | 500-SPTBZ | For Square Poles w/ Tenon | Bronze |


Mounting Cleat Included with Fixture

Square or Round Pole w/ Tenon - Up to 4 @ 90°

| | CATALOG# | DESCRIPTION | FINISH |
|---|-------------|-------------------------|--------|
|  | 500-RPT90BZ | For Tenon Up to 4 @ 90° | Bronze |


Mounting Cleat Included with Fixture

Square or Round Pole w/ Tenon - Up to 3 @ 120°

| | CATALOG# | DESCRIPTION | FINISH |
|---|--------------|--------------------|--------|
|  | 500-RPT120BZ | For Tenon 3 @ 120° | Bronze |


Mounting Cleat Included with Fixture

Round Pole Top Adapter - Up to 4 @ 90°

| | CATALOG# | DESCRIPTION | FINISH |
|---|------------------|---------------------------|--------|
|  | 500-RPT-243490BZ | 2.3" - 3.4" Pole Top O.D. | Bronze |
| | 500-RPT-35490BZ | 3.5" - 4" Pole Top O.D. | Bronze |


Mounting Cleat Included with Fixture

Round Pole Top Adapter - Up to 3 @ 120°

| | CATALOG# | DESCRIPTION | FINISH |
|---|-------------------|---------------------------|--------|
|  | 500-RPT-2434120BZ | 2.3" - 3.4" Pole Top O.D. | Bronze |


Mounting Cleat Included with Fixture

Wall Brackets

| | CATALOG# | DESCRIPTION | FINISH |
|---|----------|--------------------|--------|
|  | 500-WBBZ | Wall Mount Bracket | Bronze |


Note: Not to be used as junction box.

Wooden Pole Bracket


| | CATALOG# | DESCRIPTION | FINISH |
|---|-----------|---------------------|--------|
|  | 500-WPBBZ | Wooden Pole Bracket | Bronze |

Mounts to wood poles 8"-12" in diameter
Note: Not to be used as junction box.

Spoke Arm Brackets

| | CATALOG# | DESCRIPTION | FINISH |
|---|-----------|-----------------------------|--------|
|  | 500-SAB21 | Spoke Arm Bracket for SLP22 | Bronze |

Angled Bracket

| | CATALOG# | DESCRIPTION | FINISH |
|---|----------|------------------------|--------|
|  | 500-AAB | Angled Bracket for SLP | Bronze |

Note: All brackets are available in bronze, black, silver or white finishes.

Scan QR code above for more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Area Lighting Poles



- Steel, Aluminum, Concrete, Fiberglass
- Square, Round, Straight, Tapered, etc.




THE FOLLOWING SQUARE STRAIGHT STEEL POLES ARE PART OF OUR QUICK SHIP PROGRAM:

| PART # | HEIGHT | WIDTH | WALL THICKNESS |
|-----------------|--------|-------|----------------|
| SSS12411BZQSLB5 | 12' | 4" | 11 gauge |
| SSS15411BZQSLB5 | 15' | 4" | 11 gauge |
| SSS20411BZQSLB5 | 20' | 4" | 11 gauge |
| SSS25411BZQSLB5 | 25' | 4" | 11 gauge |

Scan QR code above for ordering format and more detailed information

- All Poles Ship Within (2) Business Days After Order Is Placed
- All Poles Drilled For (4) Fixtures At 90°
- All Poles Supplied With (3) Sets Of Plugs For Unused Holes
- All Poles Standard Bronze
- Maximum Of (10) Poles Per Order On All Quick Ship Orders
- Anchor Bolts Are Sent Same Day As Order Is Placed

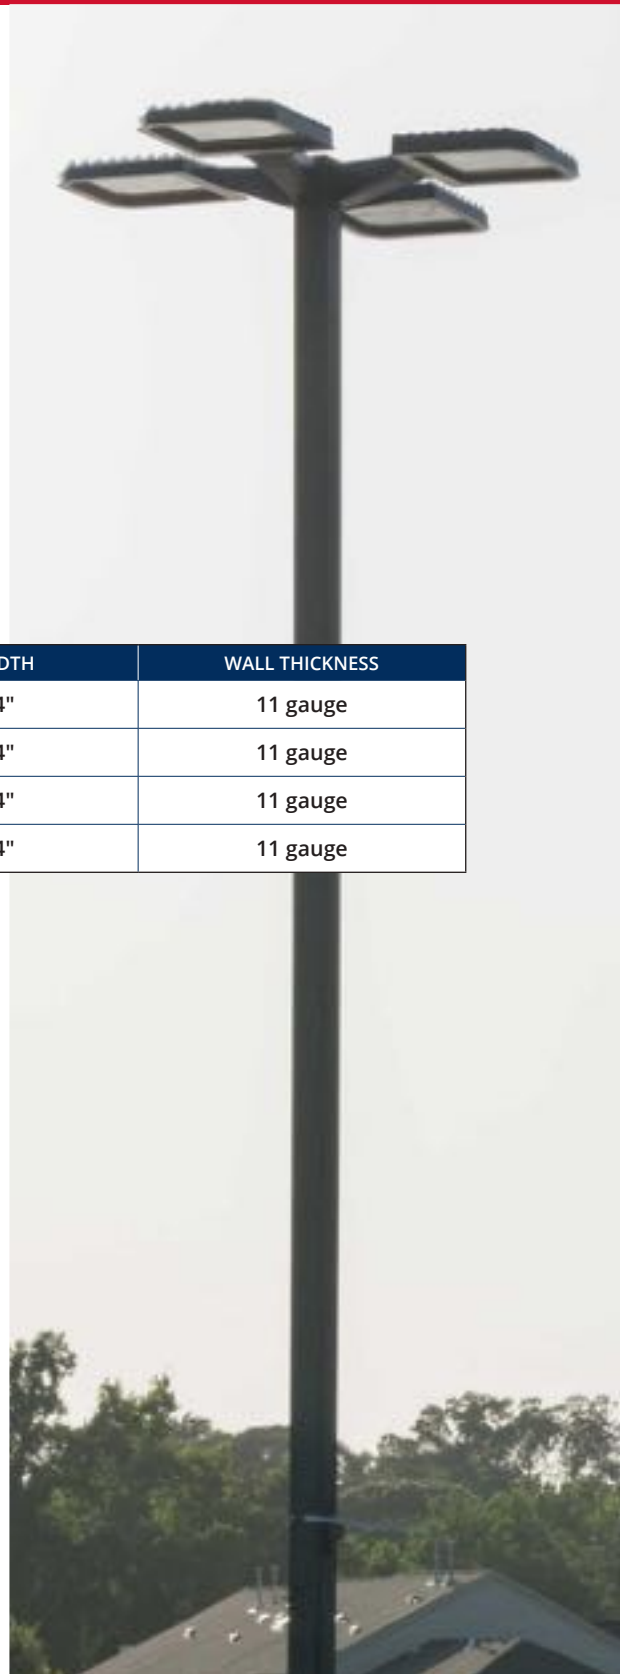

Dual Deal Luminaire/Pole Combo



Simple & Easy

Atlas offers our top area light paired with our highest quality poles in a deal that offers



EAGLE/POLE COMBO

| HOUSING | UNIT | DISTRIBUTION | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|--------------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| PXSLPS | 9L | FT | 70 | 8,717 | 139 | 8,541 | 136 | 8,541 | 136 | 63 | 175W |
| | | T5 | 70 | 8,639 | 138 | 8,465 | 135 | 8,465 | 135 | | |
| | 12L | FT | 70 | 11,417 | 129 | 11,222 | 127 | 11,222 | 127 | 89 | 250W |
| | | T5 | 70 | 11,578 | 131 | 11,380 | 129 | 11,380 | 129 | | |
| PXSLPM | 18L | T3 | 70 | 18493 | 152 | 18493 | 152 | 18,546 | 161 | 122 | 400W MH |
| | | FT | 70 | 18201 | 149 | 18201 | 149 | 18,056 | 157 | | |
| | | T5 | 70 | 18645 | 153 | 18645 | 154 | 18,556 | 161 | | |
| | 24L | T3 | 70 | 24125 | 141 | 24125 | 141 | 24,596 | 154 | 171 | 400W MH |
| | | FT | 70 | 23745 | 139 | 23745 | 139 | 23,981 | 150 | | |
| | | T5 | 70 | 24324 | 142 | 24324 | 142 | 24,637 | 154 | | |
| | 43L | T3 | 70 | 43,068 | 124 | 43,253 | 124 | 43,672 | 125 | 275 | 1000W MH |
| | | FT | 70 | 42,411 | 122 | 42,593 | 122 | 43,006 | 123 | | |
| | | T5 | 70 | 43,099 | 124 | 43,284 | 124 | 43,703 | 125 | | |
| | 50L | T3 | 70 | 49190 | 148 | 48324 | 145 | 48324 | 145 | 333 | 1000W MH |
| | | FT | 70 | 47891 | 144 | 47048 | 142 | 47048 | 142 | | |
| | | T5 | 70 | 49524 | 149 | 48652 | 146 | 48652 | 146 | | |

Scan QR code above for more detailed information



FLOOD/POLE COMBO

| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| PX PFL2G XW | 20L | 70 | 20,540 | 144 | 20,540 | 144 | 11,140 | 153 | 142 | 400W MH |
| | 25L | 70 | 25,040 | 139 | 25,040 | 139 | 25,040 | 139 | 180 | 1000W MH |
| PX PFL2G XW | 50L | 70 | 50130 | 141 | 50130 | 141 | 50130 | 141 | 357 | 1000W MH |

Scan QR code above for more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.





Independence Series Linear LED High Bay



LUMEN SELECTABLE



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



| HOUSING | UNIT | LENS | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|---------|----------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | | |
| IHBS | 12-24L | Clear | 80 | 12,967 | 158 | 12,967 | 158 | 13,011 | 157 | 83 | 175W MH |
| | | | 80 | 19,045 | 152 | 19,045 | 152 | 19,110 | 153 | 125 | 400W MH |
| | | | 80 | 23,843 | 146 | 23,843 | 146 | 23,924 | 147 | 163 | 250W MH |
| | 12-24LD | Diffused | 80 | 11,587 | 141 | 11,523 | 139 | 11,523 | 139 | 83 | 250W MH |
| | | | 80 | 16,954 | 136 | 16,860 | 135 | 16,860 | 135 | 125 | 175W MH |
| | | | 80 | 21,281 | 132 | 21,163 | 131 | 21,163 | 131 | 162 | 400W MH |
| | 15-30L | Clear | 80 | 14,135 | 158 | 14,135 | 158 | 14,435 | 158 | 90 | 175W MH |
| | | | 80 | 21,037 | 152 | 21,037 | 152 | 21,483 | 156 | 138 | 400W MH |
| | | | 80 | 27,560 | 145 | 27,560 | 145 | 28,145 | 148 | 190 | 250W MH |
| | 15-30LD | Diffused | 80 | 12,931 | 144 | 12,931 | 144 | 13,241 | 145 | 91 | 250W MH |
| | | | 80 | 19,317 | 140 | 19,317 | 140 | 19,780 | 143 | 138 | 175W MH |
| | | | 80 | 25,353 | 133 | 25,353 | 133 | 25,961 | 136 | 190 | 400W MH |
| | 15-30LN | Narrow | 80 | 13,463 | 150 | 13,463 | 150 | 13,721 | 150 | 91 | 175W MH |
| | | | 80 | 20,006 | 145 | 20,006 | 145 | 20,389 | 147 | 138 | 400W MH |
| | | | 80 | 26,318 | 138 | 26,318 | 138 | 26,822 | 141 | 190 | 250W MH |

| HOUSING | UNIT | LENS | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|--------------|------|----------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | | |
| IHB | 12L | Clear | 80 | 12,528 | 152 | 12,528 | 159 | 12,597 | 160 | 83 | 175W MH |
| | 12LD | Diffused | 80 | 11,358 | 138 | 11,358 | 138 | 11,421 | 139 | 82 | |
| | 12LN | Narrow | 80 | 11,089 | 143 | 11,089 | 143 | 11,501 | 145 | 79 | |
| | 15L | Clear | 80 | 16,144 | 154 | 16,144 | 152 | 16,513 | 157 | 105 | 250W MH |
| | 15LD | Diffused | 80 | 14,567 | 140 | 14,567 | 140 | 14,949 | 143 | 105 | |
| | 15LN | Narrow | 80 | 14,652 | 140 | 14,652 | 140 | 15,196 | 145 | 105 | |
| | 18L | Clear | 80 | 18,597 | 153 | 18,597 | 153 | 19,022 | 156 | 122 | 250W MH |
| | 18LD | Diffused | 80 | 16,767 | 137 | 16,767 | 137 | 17,207 | 141 | 122 | |
| | 18LN | Narrow | 80 | 16,766 | 138 | 16,766 | 138 | 17,389 | 143 | 122 | |
| | 24L | Clear | 80 | 23,910 | 148 | 23,899 | 148 | 23,899 | 148 | 162 | 400W MH |
| | 24LD | Diffused | 80 | 21,506 | 133 | 21,404 | 136 | 21,404 | 136 | 162 | |
| | 24LN | Narrow | 80 | 21,363 | 132 | 21,363 | 132 | 21,491 | 133 | 162 | |
| | 30L | Clear | 80 | 29,550 | 159 | 29,550 | 159 | 30,370 | 166 | 186 | 400W MH |
| | 30LD | Diffused | 80 | 26,470 | 143 | 26,470 | 143 | 27,343 | 149 | 185 | |
| | 30LN | Narrow | 80 | 26,488 | 143 | 26,488 | 143 | 27,097 | 148 | 185 | |

Scan QR code above for ordering format and more detailed information

INDEPENDENCE HIGH BAY SERIES



PRODUCT VIDEO
Scan to view video



CASE STUDIES
Scan to view





Independence Series Linear LED High Bay



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



| HOUSING | UNIT | LENS | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|----------|----------|--------|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| IHB | 30L2 | Clear | 80 | 28,347 | 160 | 28,347 | 160 | 29,134 | 165 | 177 | 400W MH |
| | 30LD2 | Diffused | 80 | 25,537 | 145 | 25,537 | 145 | 26,379 | 149 | | |
| | 30LN2 | Narrow | 80 | 25,400 | 144 | 25,400 | 144 | 25,552 | 145 | | |
| | 36L2 | Clear | 80 | 37,194 | 153 | 37,194 | 153 | 38,044 | 156 | 244 | 1000W MH |
| | 36LD2 | Diffused | 80 | 33,534 | 137 | 33,534 | 137 | 34,414 | 141 | | |
| | 36LN2 | Narrow | 80 | 33,532 | 138 | 33,532 | 138 | 34,778 | 143 | | |
| | 48L2 | Clear | 80 | 47,820 | 148 | 47,798 | 148 | 47,798 | 148 | 324 | 1000W MH |
| | 48LD2 | Diffused | 80 | 43,012 | 133 | 42,808 | 136 | 42,808 | 136 | | |
| | 48LN2 | Narrow | 80 | 42,726 | 132 | 42,726 | 132 | 42,982 | 133 | | |
| | 60L2 | Clear | 80 | 59,100 | 159 | 59,100 | 159 | 60,740 | 166 | 371 | 1000W MH |
| 60LD2 | Diffused | 80 | 52,940 | 143 | 52,940 | 143 | 54,686 | 149 | | | |
| 60LN2 | Narrow | 80 | 52,976 | 143 | 52,976 | 143 | 54,194 | 148 | | | |

Scan QR code above for ordering format and more detailed information



Independence Series Linear LED High Bay



- Easy to install, easy to maintain
- Optical Grade Individual Lenses
- Delivers Increased Footcandles



| HOUSING | UNIT | LENS | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|----------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| IHB | 72L3 | Clear | 80 | 71730 | 148 | 71697 | 148 | 71697 | 148 | 485 | 1000W MH |
| | 72LD3 | Diffused | 80 | 64518 | 133 | 64212 | 133 | 64212 | 133 | | |
| | 72LN3 | Narrow | 80 | 64089 | 132 | 64089 | 132 | 64473 | 133 | | |
| | 90L3 | Clear | 80 | 88650 | 159 | 88650 | 159 | 91110 | 166 | 557 | 1500W MH |
| | 90LD3 | Diffused | 80 | 79410 | 143 | 79410 | 143 | 82029 | 149 | | |
| | 90LN3 | Narrow | 80 | 79464 | 143 | 79464 | 143 | 81291 | 148 | | |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



2' Linear LED High Bay

NARROW BODY



- 20-gauge steel housing
- 91% efficiency high-transmission lens*
- Tool-free driver compartment



| HOUSING | UNIT* | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILH2 | 9L | 80 | 10,300 | 139 | 10,300 | 139 | 10,300 | 139 | 74 | 4L T8 FL |
| | 9LL | 80 | 9,631 | 130 | 9,631 | 130 | 9,635 | 131 | 74 | |
| ILHS2 | 12L | 80 | 12,421 | 151 | 12,303 | 146 | 12,503 | 152 | 84 | 175W MH |
| | 12LL | 80 | 11,580 | 140 | 11,485 | 137 | 11,580 | 140 | 84 | |
| | 15L | 80 | 15,277 | 154 | 14,915 | 148 | 15,277 | 154 | 101 | 250W MH |
| | 15LL | 80 | 14,353 | 144 | 13,841 | 137 | 14,353 | 144 | 101 | |

Scan QR code above for ordering format and more detailed information

*Suffix LL = with lens

2' Linear LED High Bay

WIDE BODY



- 20-gauge steel housing
- 91% efficiency high-transmission lens*
- Tool-free driver compartment



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILH2 | 18L | 80 | 20,240 | 139 | 20,240 | 139 | 20,240 | 139 | 146 | 4L T8 FL |
| | 18LL | 80 | 18,870 | 130 | 18,870 | 130 | 18,870 | 130 | 145 | |
| | 24L | 80 | 25,342 | 152 | 25,870 | 138 | 25,342 | 152 | 167/187 | 175W MH |
| | 24LL | 80 | 23,757 | 143 | 24,230 | 130 | 23,757 | 143 | 167/187 | |
| | 30L | 80 | 30,716 | 154 | n/a | n/a | 30,716 | 154 | 199 | 250W MH |
| | 30LL | 80 | 28,757 | 144 | n/a | n/a | 28,757 | 144 | 199 | |

Scan QR code above for ordering format and more detailed information

*Suffix LL = with lens

LINEAR HIGH BAY SERIES



PRODUCT VIDEO
Scan to view video



CASE STUDIES
Scan to view

4' Linear LED High Bay

NARROW BODY



- 20-gauge steel housing
- 91% efficiency high-transmission lens*
- Tool-free driver compartment



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILH4 | 15L | 80 | 15,819 | 148 | 15,267 | 148 | 15,267 | 153 | 103 | 250W MH |
| | 15LL | 80 | 14,914 | 145 | 14,393 | 140 | 14,393 | 140 | | |
| | 18L | 80 | 18,270 | 145 | 17,632 | 139 | 17,632 | 139 | 126 | 250W MH |
| | 18LL | 80 | 17,231 | 137 | 16,630 | 132 | 16,630 | 132 | | |
| ILHS4 | 24L | 80 | 26,102 | 156 | 25,191 | 150 | 25,191 | 150 | 167 | 400W MH |
| | 24LL | 80 | 24,698 | 148 | 23,836 | 142 | 23,836 | 142 | | |
| | 30L | 80 | 31,151 | 153 | 30,064 | 147 | 30,064 | 147 | 204 | 400W MH |
| | 30LL | 80 | 29,500 | 145 | 28,470 | 139 | 28,470 | 139 | | |

Scan QR code above for ordering format and more detailed information

*Suffix LL = with lens

4' Linear LED High Bay

WIDE BODY



- 20-gauge steel housing
- 91% efficiency high-transmission lens*
- Tool-free driver compartment



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILH4 | 36L | 80 | 37,295 | 156 | 35,993 | 151 | 35,993 | 151 | 239 | 250W MH |
| | 36LL | 80 | 35,162 | 147 | 33,935 | 142 | 33,935 | 147 | | |
| | 48L | 80 | 46,352 | 151 | 44,734 | 146 | 44,734 | 146 | 307 | 400W MH |
| | 48LL | 80 | 43,528 | 142 | 42,009 | 137 | 42,009 | 137 | | |

Scan QR code above for ordering format and more detailed information

*Suffix LL = with lens

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.





Origin Series Die Cast Linear High Bay



FULLY SELECTABLE


- + LUMEN • CCT



- Replace up to 6 standard high bays with just 1
- Durable die-cast aluminum construction
- Built-in Connect Control Port requires no wiring to connect the IRH-MOT sensor

| HOUSING | UNIT | CRI | 4000K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|--------|-----|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORHBS | 12-21L | 80 | 10,986 | 134 | 10,986 | 134 | 82 | 175W MH |
| | | | 14,304 | 134.9 | 14,304 | 134.9 | 106 | 250W MH |
| | | | 17,037 | 134.1 | 17,037 | 134.1 | 127 | 400W MH |
| | 22-30L | 80 | 22,493 | 151 | 23,012 | 152 | 150 | 400W MH |
| | | | 24,259 | 148 | 25,024 | 150 | 165 | 400W MH |
| | | | 30,609 | 138 | 31,221 | 141 | 222 | 400W MH |

Scan QR code above for more detailed information

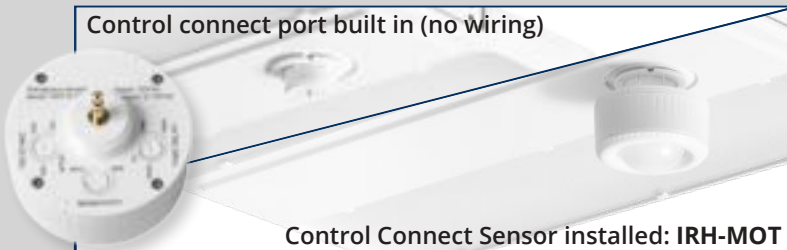

Round LED High Bay

FULLY SELECTABLE
- ☀️ + LUMEN • CCT 🌈



- Replace 9 standard fixtures with just 1
- Die Cast Aluminum Construction
- Polycarbonate Lens


| HOUSING | UNIT | CRI | SELECTABLE 4000K CCT | | SELECTABLE 4500K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|--------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| IRHS | 18-30L | 80 | 18,090 | 134 | 20,790 | 154 | 18,765 | 139 | 135 | 175W MH |
| | | 80 | 24,120 | 134 | 27,720 | 154 | 25,020 | 139 | 180 | 250W MH |
| | | 80 | 30,742 | 123 | 34,253 | 144 | 31,535 | 125 | 238 | 400W MH |

Scan QR code above for ordering format and more detailed information



High Bay Options & Accessories

Motion Sensors

| | CATALOG# | DESCRIPTION |
|---|----------|---|
|  | IRH-MOT | Control Connect Sensor (120, 277V) <ul style="list-style-type: none"> - Provides multi-level control based on motion - Controls 0-10 VDC LED drivers - 3 levels of control: Time (3-60 mins), Sensitivity and Dimming (0-75%) - No remote needed. Settings stay if power is interrupted. |

Optical Accessories

| | CATALOG# | DESCRIPTION |
|---|----------|---------------------------------|
|  | RHB16SAR | Spun Aluminum Reflector |
|  | RHB16FGC | 16" Flat Glass and Clamp Band |
|  | RHB16WG | 16" Wireguard |
|  | RHB16PAR | Prismatic Acrylic Refractor |
|  | RHB16CLC | 16" Conical Lens and Clamp Band |

ORHBS Pendant Mount

| | CATALOG# | DESCRIPTION |
|--|----------|--|
| | ORHBSPMK | Pendant Mount Adapter Kit; Fits 3/4" NPT |

Scan QR code above for more detailed information

IRH Pendant Mount

| | CATALOG# | DESCRIPTION |
|---|----------|--|
|  | IRH-PMK | Pendant Mount Adapter Kit; Fits 3/4" NPT |

Scan QR code above for more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



2' Linear LED Wet Location NARROW BODY



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|---------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILW | 25LED2D | 80 | 4,455 | 142 | 4,455 | 142 | 4,624 | 144 | 32 | 70W MH |

Scan QR code above for ordering format and more detailed information

4' Linear LED Wet Location NARROW BODY **LUMEN SELECTABLE**



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILWS | 4-8L | 80 | 4,027 | 147 | 4,027 | 147 | 3,998 | 146 | 27 | 2L T8 FL |
| | | 80 | 5,912 | 145 | 5,912 | 145 | 5,870 | 144 | 41 | 2L T5 FL |
| | | 80 | 7,889 | 140 | 7,889 | 140 | 7,833 | 140 | 56 | 4L T8 FL |

| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|---------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILW | 30LED4D | 80 | 4,270 | 144 | 4,270 | 144 | 4,307 | 143 | 30 | 2L T5 FL |
| | 48LED4D | 80 | 7,093 | 149 | 7,047 | 147 | 7,047 | 147 | 48 | 4L T8 FL |

Scan QR code above for ordering format and more detailed information

8' Linear LED Wet Location NARROW BODY **LUMEN SELECTABLE**



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILWS | 7-13L | 80 | 6,846 | 154 | 6,824 | 153 | 6,824 | 153 | 45 | 4L T8 FL |
| | | 80 | 10,302 | 153 | 10,269 | 152 | 10,269 | 152 | 68 | 4L T5 FL |
| | | 80 | 13,863 | 146 | 13,819 | 146 | 13,819 | 146 | 95 | 4L T5 FL |

| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|---------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILW | 76LED8D | 80 | 11,581 | 154 | 11,506 | 153 | 11,506 | 153 | 75 | 4L T5 FL |
| | 98LED8D | 80 | 14,067 | 150 | 13,976 | 149 | 13,976 | 149 | 94 | 4L T5 FL |

Scan QR code above for ordering format and more detailed information

LINEAR WET LOCATION SERIES



PRODUCT VIDEO
Scan to view video



CASE STUDIES
Scan to view



2' Linear LED Wet Location WIDE BODY



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-----------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILW | 76LED2WD | 80 | 10,380 | 149 | 10,380 | 149 | 10,380 | 149 | 75 | 4L T5 FL |
| | 98LED2WD | 80 | 13,570 | 143 | 13,570 | 143 | 13,570 | 143 | 95 | 4L T5 FL |
| | 130LED2WD | 80 | 16,930 | 132 | 16,930 | 132 | 16,930 | 132 | 129 | 6L T5 FL |

Scan QR code above for ordering format and more detailed information

4' Linear LED Wet Location WIDE BODY

LUMEN SELECTABLE



- One-piece high-impact durable housing
- Injection-molded frosted acrylic lens
- IP65/IP66/IP67 rating



| HOUSING | UNIT | LENS | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|-------------------|--------|---------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SELECTABLE | | | | | | | | | | | |
| ILWS | 13-27L | Frosted | 80 | 12,863 | 149 | 12,840 | 149 | 12,840 | 149 | 86 | 6L T5 FL |
| | | | 80 | 19,377 | 149 | 19,342 | 149 | 19,342 | 149 | 130 | |
| | | | 80 | 26,320 | 144 | 26,272 | 143 | 26,272 | 143 | 184 | |
| | | Clear | 80 | 12,863 | 149 | 12,840 | 149 | 12,840 | 149 | 86 | 6L T5 FL |
| | | | 80 | 19,377 | 149 | 19,342 | 149 | 19,342 | 149 | 130 | |
| | | | 80 | 26,320 | 144 | 26,272 | 143 | 26,424 | 144 | 183 | |

| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|--------------|-----------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FIXED | | | | | | | | | | |
| ILW | 98LED4WD | 80 | 14,033 | 147 | 14,033 | 147 | 14,130 | 148 | 96 | 4L T5 FL |
| | 130LED4WD | 80 | 17,821 | 142 | 17,821 | 142 | 17,621 | 140 | 126 | 6L T5 FL |
| | 190LED4WD | 80 | 27,480 | 144 | 27,480 | 144 | 27,480 | 144 | 191 | 6L T5 FL |

Scan QR code above for ordering format and more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Potomac Series Linear Wet Location RETROFIT KITS



- Installs in less than 5 minutes
- Easy upgrade to LED with gear tray retrofit
- Reduce power consumption up to 50%



| HOUSING | UNIT | SIZE | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|-----------|-----------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ILWRK | 30LED4D | 4' Narrow | 80 | 4,511 | 143 | 4,511 | 143 | 4,508 | 143 | 30 | 2 Lamp T8 |
| | 48LED4D | | 80 | 6,695 | 138 | 6,695 | 138 | 6,695 | 138 | 48 | 2 Lamp T5 |
| | 76LED8D | | 80 | 10,650 | 143 | 10,650 | 143 | 10,650 | 143 | 76 | 2 Lamp T8 |
| | 98LED8D | 8' Narrow | 80 | 13,060 | 138 | 13,060 | 138 | 13,060 | 138 | 98 | 2 Lamp T5 |
| | 98LED8D | | 80 | 14,130 | 147 | 14,130 | 147 | 14,130 | 147 | 98 | 4 Lamp T8 |
| | 130LED4WD | 4' Wide | 80 | 17,590 | 135 | 17,590 | 135 | 17,590 | 135 | 130 | 6 Lamp T8 |
| | 190LED4WD | | 80 | 27,480 | 144 | 27,480 | 144 | 27,480 | 144 | 190 | 6 Lamp T5 |

Scan QR code above for ordering format and more detailed information

Independence Series 4' Linear Wet Location



| HOUSING | UNIT | CRI | 4000K CCT | | 4500K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| IVT | 5L | 80 | 5,010 | 148 | 4,849 | 143 | 4,849 | 143 | 34 | 4L T8 FL |

Scan QR code above for ordering format and more detailed information

Origin Series 4' LED Vapor Tight



- Frosted injection-molded acrylic lens eliminates glare
- Uses durable latches to secure the lens to the housing
- Origin products are backed by the same US-based customer service



| HOUSING | UNIT | CRI | 4000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORVT | 44L | 80 | 4,500 | 113 | 40 | 2L T5 FL |

Scan QR code above for more detailed information

POTOMAC WET LOCATION RETROFIT KITS



QUICK & EASY INSTALLATION
Scan to view installation video



CASE STUDIES
Scan to view



Origin Series LED Temp Light

SMALL | MEDIUM



- Retractable handle allows for quick and easy mounting
- Features a female power receptacle for daisy-chaining multiple lights
- Origin products are backed by the same US-based customer service

| HOUSING | UNIT | CRI | 5000K CCT | | WATTAGE |
|---------|------|-----|------------------|----------------|---------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | |
| ORTEMPS | 7L | 80 | 7,200 | 120 | 60 |
| ORTEMPM | 12L | 80 | 12,000 | 120 | 100 |

Scan QR code above for more detailed information

Industrial Grade Stairwell Light

2' | 4'



- Cold rolled die formed steel housing
- Prismatic high-transmission lens
- Factory-installed ultrasonic motion sensor



| HOUSING | UNIT | CRI | 3500K CCT | | 4000K CCT | | 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|------------------|----------------|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| SWL2 | 2L | 80 | 1,918 | 119 | 1,968 | 123 | 2,032 | 127 | 16 | 70W MH |
| | 3L | 80 | 2,852 | 124 | 2,967 | 129 | 3,036 | 132 | 23 | 4L T8 FL |
| SWL4 | 5L | 80 | 4,788 | 133 | 5,011 | 139 | 5,040 | 140 | 36 | 4L T8 FL |
| | 6L | 80 | 5,720 | 130 | 5,940 | 135 | 6,028 | 137 | 44 | |
| | 8L | 80 | 7,750 | 125 | 8,044 | 129 | 8,184 | 132 | 62 | |

Scan QR code above for ordering format and more detailed information



Origin Series LED Strips

2' | 4' | 8'



- Lightweight and durable 22-gauge post-painted housing
- High-brightness LEDs protected by a frosted lens
- Origin products are backed by the same US-based customer service



| HOUSING | UNIT | CRI | 4000K CCT | | WATTAGE | REPLACES UP TO |
|---------|------|-----|------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORST2 | 2L | 80 | 2,564 | 128 | 20 | 70W MH |
| ORST4 | 4L | 80 | 4,500 | 113 | 40 | 4L T8 FL |
| ORST8 | 8L | 80 | 8,450 | 130 | 65 | 4L T8 FL |

Scan QR code above for more detailed information

THE INFORMATION YOU NEED - ALL IN ONE PLACE

Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Field Adjustable Edge Lit Panels

1x4 | 2x2 | 2x4

FULLY SELECTABLE

- + LUMEN • CCT



- Field adjustable lumen output and color temperature
- Quick connects for easy installation
- PMMA lens designed not to yellow

| UNIT | FIXTURE LENGTH | CRI | SELECTABLE 3500K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|---------|----------------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| FAELP14 | 1'x4' | >80 | 3,102 | 121 | 3,274 | 132 | 3,154 | 123 | 25 | (2) F32-T8 |
| | | | 3,513 | 118 | 3,748 | 130 | 3,570 | 120 | 30 | |
| | | | 4,398 | 110 | 4,767 | 125 | 4,464 | 112 | 40 | |
| FAELP22 | 2'x2' | >80 | 3,187 | 121 | 3,385 | 133 | 3,259 | 122 | 25 | (3) F24-T5 |
| | | | 3,599 | 117 | 3,863 | 131 | 3,683 | 119 | 30 | |
| | | | 4,412 | 109 | 4,856 | 126 | 4,542 | 111 | 40 | |
| FAELP24 | 2'x4' | >80 | 3,248 | 112 | 3,413 | 120 | 3,409 | 117 | 30 | (4) F32-T8 |
| | | | 3,702 | 109 | 3,921 | 119 | 3,891 | 115 | 35 | |
| | | | 4,698 | 104 | 5,046 | 115 | 4,971 | 110 | 45 | |

Scan QR code above for more detailed information



Origin Series Backlit Panels

1x4 | 2x2 | 2x4

FULLY SELECTABLE

- + LUMEN • CCT



- Replace 9 standard panels with just 1 fixture
- Low-profile design makes installation quick and easy.
- Origin products are backed by the same US-based customer service

| UNIT | FIXTURE LENGTH | CRI | SELECTABLE 3500K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|------------|----------------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| ORBLP14SEL | 1'x4' | 80 | 1,875 | 125 | 1,875 | 125 | 1,875 | 125 | 15 | (2) F32-T8 |
| | | | 3,125 | 125 | 3,125 | 125 | 3,125 | 125 | 25 | |
| | | | 4,125 | 125 | 4,125 | 125 | 4,125 | 125 | 33 | |
| ORBLP22SEL | 2'x2' | 80 | 1,875 | 125 | 1,875 | 125 | 1,875 | 125 | 15 | (3) F24-T5 |
| | | | 3,125 | 125 | 3,125 | 125 | 3,125 | 125 | 25 | |
| | | | 4,125 | 125 | 4,125 | 125 | 4,125 | 125 | 33 | |
| ORBLP24SEL | 2'x4' | 80 | 3,500 | 125 | 3,500 | 125 | 3,500 | 125 | 28 | (4) F32-T8 |
| | | | 4,750 | 125 | 4,750 | 125 | 4,750 | 125 | 38 | |
| | | | 6,000 | 125 | 6,000 | 125 | 6,000 | 125 | 48 | |

Scan QR code above for more detailed information

FIELD ADJUSTABLE EDGE LIT PANELS



PRODUCT VIDEO
Scan to view video



CASE STUDIES
Scan to view





Origin Series Low Profile Troffers

1x4 | 2x2 | 2x4



FULLY SELECTABLE
-☀️+ LUMEN • CCT 🌈🎛️



- Replace 9 standard panels with just 1 fixture
- Low-profile design makes installation quick and easy.
- Origin products are backed by the same US-based customer service



| UNIT | FIXTURE LENGTH | CRI | SELECTABLE 3500K CCT | | SELECTABLE 4000K CCT | | SELECTABLE 5000K CCT | | WATTAGE | REPLACES UP TO |
|------------|----------------|-----|----------------------|----------------|----------------------|----------------|----------------------|----------------|---------|----------------|
| | | | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | DELIVERED LUMENS | EFFICACY (LPW) | | |
| TLP14S2-4L | 1'x4' | >80 | 2,609 | 130 | 2,715 | 137 | 2,591 | 129 | 20 | (3) F24-T5 |
| | | | 3,262 | 130 | 3,433 | 137 | 3,239 | 129 | 25 | |
| | | | 3,838 | 125 | 3,993 | 136 | 3,811 | 124 | 30 | |
| TLP22S2-4L | 2'x2' | >80 | 3,804 | 135 | 3,933 | 143 | 3,891 | 137 | 30 | (3) F24-T5 |
| | | | 4,378 | 133 | 4,531 | 140 | 4,472 | 135 | 35 | |
| | | | 4,853 | 122 | 4,998 | 127 | 4,982 | 125 | 40 | |
| TLP24S4-6L | 2'x4' | >80 | 4,188 | 140 | 4,315 | 148 | 4,259 | 143 | 32 | (4) F32-T8 |
| | | | 5,586 | 133 | 5,675 | 143 | 5,400 | 135 | 42 | |
| | | | 6,428 | 127 | 6,760 | 137 | 6,490 | 128 | 52 | |





Scan QR code above for more detailed information





THE INFORMATION YOU NEED - ALL IN ONE PLACE







Visit www.atlasled.com or scan QR code more information, including cut sheets, case studies, installation videos, instruction sheets, savings information, IES files, lighting calculation tools and more.



Linear High Bay & Wet Location Comparisons

| 2' HIGH BAY | LED | | | Fluorescent / HID | | | | |
|--|--------|-------|-------------|---|--------------------|-------------|-----------------|-------|
| | LUMENS | WATTS | ANNUAL COST | FIXTURE TYPE | TOTAL WATTAGE USED | ANNUAL COST | ANNUAL SAVINGS* | |
|  | 9,000 | 74 | \$32 |  | 4L T8 | 151 | \$91 | \$65 |
| | 12,000 | 83 | \$36 | | 4L T8 | 151 | \$91 | \$55 |
| | 15,000 | 99 | \$43 | | 4L T5 | 238 | \$129 | \$86 |
|  | 12,000 | 91 | \$40 |  | 4L T8 | 151 | \$91 | \$57 |
| | 15,000 | 102 | \$45 | | 4L T5 | 238 | \$129 | \$84 |
| | 18,000 | 145 | \$64 | | 4L T5 | 238 | \$129 | \$65 |
| | 24,000 | 167 | \$73 | | 6L T5 | 342 | \$175 | \$102 |
| | 30,000 | 199 | \$87 | | 6L T5 | 342 | \$175 | \$88 |

| 4' HIGH BAY | LED | | | Fluorescent / HID | | | | |
|--|--------|-------|-------------|---|--------------------|-------------|-----------------|-------|
| | LUMENS | WATTS | ANNUAL COST | FIXTURE TYPE | TOTAL WATTAGE USED | ANNUAL COST | ANNUAL SAVINGS* | |
|  | 9,000 | 61 | \$27 |  | 4L T8 | 151 | \$91 | \$64 |
| | 12,000 | 75 | \$33 | | 4L T8 | 151 | \$91 | \$58 |
| | 15,000 | 100 | \$44 | | 4L T5 | 238 | \$129 | \$85 |
| | 18,000 | 157 | \$69 | | 4L T5 | 238 | \$129 | \$60 |
| | 24,000 | \$166 | \$73 | | 6L T5 | 342 | \$175 | \$102 |
| | 30,000 | \$198 | \$87 | | 6L T5 | 342 | \$175 | \$88 |
|  | 24,000 | 164 | \$72 |  | 6L T5 | 342 | \$175 | \$103 |
| | 30,000 | 203 | \$89 | | 6L T5 | 342 | \$175 | \$86 |
| | 36,000 | 249 | \$109 | | 1000W MH | 1080 | \$523 | \$414 |
| | 48,000 | 303 | \$133 | | 1000W MH | 1080 | \$523 | \$390 |
| | 60,000 | 401 | \$176 | | 1000W MH | 1080 | \$523 | \$347 |






| | LED | | | Fluorescent | | | | |
|--|--------|-------|-------------|---|--------------------|-------------|-----------------|-------|
| | LUMENS | WATTS | ANNUAL COST | FIXTURE TYPE | TOTAL WATTAGE USED | ANNUAL COST | ANNUAL SAVINGS* | |
|  | 2 FT | 25 | \$11 |  | 2L T8 | 77 | \$59 | \$48 |
| | 4 FT | 48 | \$21 | | 4L T8 | 151 | \$91 | \$70 |
| | 8 FT | 76 | \$33 | | 6L T8 | 186 | \$107 | \$74 |
| | 8 FT | 98 | \$43 | | 4L T5 | 238 | \$129 | \$86 |
|  | 2 FT | 76 | \$33 |  | 6L T8 | 186 | \$107 | \$74 |
| | 2 FT | 98 | \$43 | | 4L T5 | 238 | \$129 | \$86 |
| | 2 FT | 130 | \$57 | | 6L T5 | 342 | \$175 | \$118 |
|  | 4 FT | 98 | \$43 |  | 4L T5 | 238 | \$129 | \$86 |
| | 4 FT | 130 | \$57 | | 6L T5 | 342 | \$175 | \$118 |
| | 4 FT | 190 | \$83 | | 6L T5 | 342 | \$175 | \$92 |

*Based on 12 hours per day | \$.10/KWH | Inc. Maintenance




Linear High Bay & Wet Location Options & Accessories

Factory Installed Options




| | SUFFIX # | DESCRIPTION |
|---|----------|---|
|  | IC | Integrated Control (120, 277V) <ul style="list-style-type: none"> - Omni-Directional Infrared Motion Sensor - Photocell Sensor for Daylight Harvesting - Bi-Level Switching |
|  | M | 360° Motion Sensor (120, 277V) <ul style="list-style-type: none"> - 2 Interchangeable, Application Specific Lenses (Aisle, High Bay, Low Bay) |
| | M2 | 360° Motion Sensor (208,240,480V) <ul style="list-style-type: none"> - 2 Interchangeable, Application Specific Lenses (Aisle, High Bay, Low Bay) |
|  | L | Tool-less Snap On Lens <ul style="list-style-type: none"> - Frosted Acrylic Lens - 91% Efficiency - Provides Improved Visual Comfort - High Impact w/ Scratch Resistant Surface - Provides Wider, Smoother & Uniform Light Output - Protects LEDs |
|  | W | Wireguard for Narrow High Bay - installed <ul style="list-style-type: none"> - Protects Fixtures from Hazards - Tool-less Entry - Hinges Down |
| | W | Wireguard for Wide High Bay - installed <ul style="list-style-type: none"> - Protects Fixtures from Hazards - Tool-less Entry - Hinges Down |
|  | P | Pendant Mount <ul style="list-style-type: none"> - Accepts 3/4" Rigid Conduit - Single Point Mounting |
| | SP | 10Kv Surge Protector |

Factory Installed Cord Sets

| | SUFFIX # | DESCRIPTION |
|---|----------|--------------|
|  | xC* | x' Cord |
| | xT* | x' 120V Plug |
| | xE* | x' 208V Plug |
| | xF* | x' 240V Plug |
| | xS* | x' 277V Plug |

*x = 3 for 3' Cord; 6 for 6' cord, 10 for 10' cord and 20 for 20' cord lengths

Field Available Accessories

| | CATALOG# | DESCRIPTION |
|--|---------------|---|
|  | MS360 | 360° Motion Sensor (120, 277V) |
| | MS360-480 | 360° Motion Sensor (208, 240, 480V) |
| | MS360WL | Wet Location Motion Sensor (120, 277V) |
| | MS360WL-480 | Wet Location Motion Sensor (208, 240, 480V) |
|  | 150-103WL45-4 | 45° Mounting Bracket (Pack of 2) |
| | 150-103WL45-8 | 45° Mounting Bracket (Pack of 3) |
|  | WGH33 | Wireguard for Narrow 4' High Bay |
| | WGH36 | Wireguard for Wide 4' High Bay |
|  | CH36 | 36" Chain Set (Set of 2) |
| | CH36HFC | 36" Chain Set w/ Hammer-On Flange |
|  | CA36 | 36" Cable Set (Set of 2) |
|  | PMK | Pendant Mount Kit for 4' High Bay |
| | PMK-2 | Pendant Mount Kit for 2' High Bay |
| | 80-SP | 10Kv Surge Protection |
| | 80-HS | Hook Set (2) |

Scan QR code above for more detailed information

Thermoplastic LED Exit Sign



- Snap-fit faceplate design for installation without tools
- Removable universal chevrons for directional indications
- Single face and double face (extra faceplate included)

| UNIT | DESCRIPTION | FINISH | LETTER COLOR | VOLTAGE |
|----------|--|--------|--------------|---------|
| EXPRWR | Thermoplastic Exit Sign | White | Red | 120/277 |
| EXPRWG | Thermoplastic Exit Sign | White | Green | 120/277 |
| EXPRWRRC | Thermoplastic Exit Sign - Remote Capable | White | Red | 120/277 |
| EXPRWGRC | Thermoplastic Exit Sign - Remote Capable | White | Green | 120/277 |

Scan QR code above for more detailed information

Thermoplastic LED Exit/Emergency Combo



- Two factory-installed LED round lighting heads
- Snap-fit faceplate design for installation without tools
- Single face and double face (extra faceplate included)

| UNIT | DESCRIPTION | FINISH | LETTER COLOR | VOLTAGE |
|----------|---|--------|--------------|---------|
| EECPWR | Thermoplastic LED Exit/Emergency Combo | White | Red | 120/277 |
| EECPWG | Thermoplastic LED Exit/Emergency Combo | White | Green | 120/277 |
| EECPWRRC | Thermoplastic LED Exit/Emergency Combo - Remote Capable | White | Red | 120/277 |
| EECPWGRC | Thermoplastic LED Exit/Emergency Combo - Remote Capable | White | Green | 120/277 |

Scan QR code above for more detailed information

Oval 2-Headed LED Emergency Light



- Injection-molded, high-impact, UV-stabilized, UL94 V-0 thermoplastic construction
- Two factory-installed LED lamp heads are fully adjustable

| UNIT | DESCRIPTION | FINISH | VOLTAGE |
|---------|--|--------|---------|
| EMO2A | Oval 2 headed emergency light | White | 120/277 |
| EMO2ARC | Oval 2 headed emergency light - Remote Capable | White | 120/277 |

Scan QR code above for more detailed information

Architectural LED Emergency Light



- Decorative, low-profile, architectural design
- Durable, die-cast housing is low profile and easy to install
- Sealed and gasketed to protect against the elements

| UNIT | DESCRIPTION | FINISH | VOLTAGE |
|---------|--|--------|---------|
| ERD12BZ | Architectural LED Emergency Light w/ Photocell | Bronze | 120/277 |

Scan QR code above for more detailed information

Indoor/Outdoor LED Remote Heads



- Weatherproof plastic housing with LED assembly
- Flame-Retardant High Impact Thermoplastic Head(s)
- Die-cast cover plate for added durability


| UNIT | DESCRIPTION | TOTAL WATTAGE | VOLTAGE |
|--------|-------------------------------------|---------------|---------|
| ERHR12 | Single Remote Head - Indoor/Outdoor | 1.17 | 3.6 |
| ERHR22 | Double Remote Head - Indoor/Outdoor | 2.34 | 3.6 |

Scan QR code above for more detailed information


Technical Information

GENERAL

Most flood lights have optical designs that provide their best performance when aimed within a certain range.

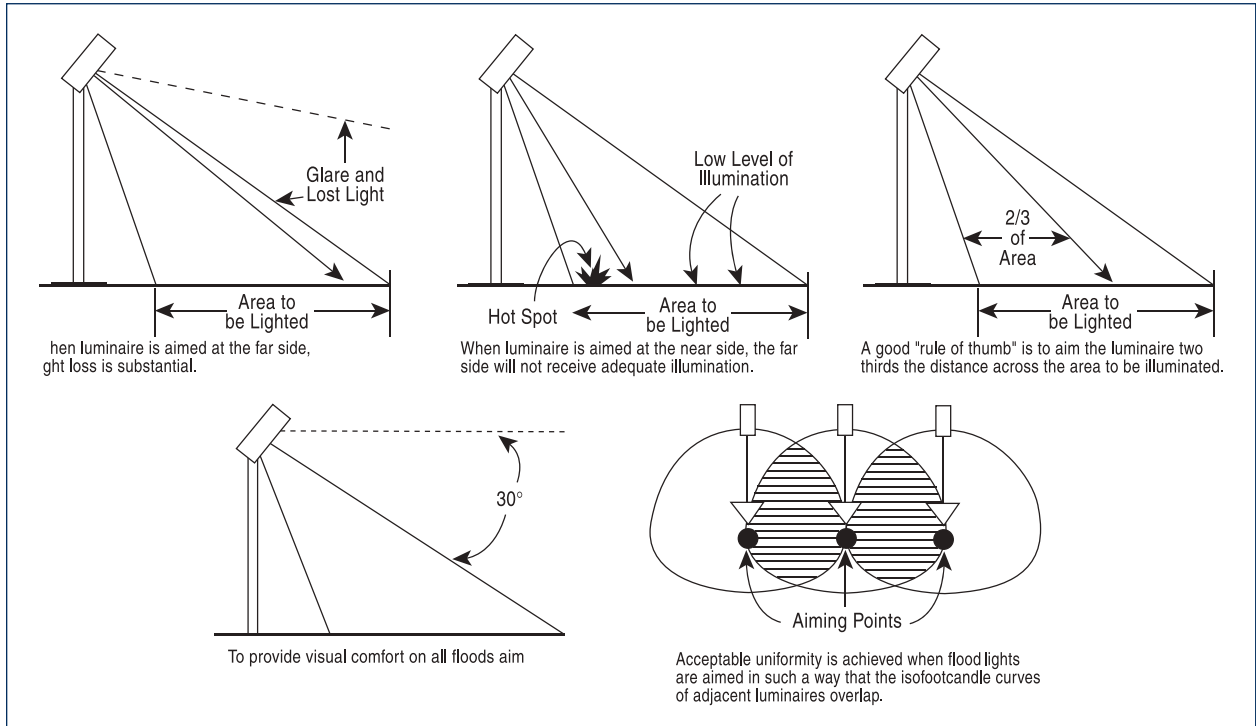

Building Lighting General Rules

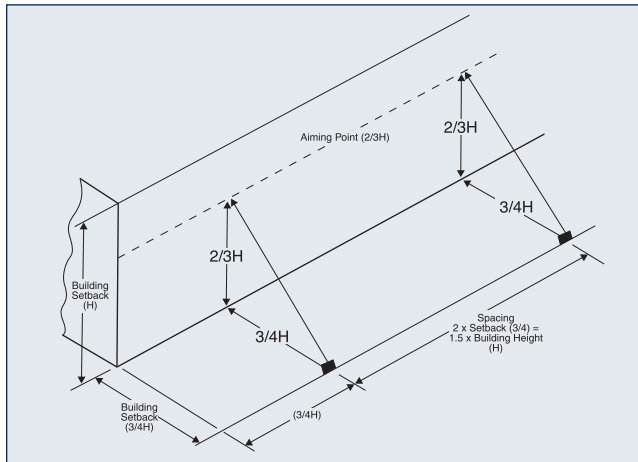

Luminaire Setback from Building Facade:

3/4 the height of the building (or vertical distance). Closer will reduce uniformity, farther away will reduce lighting efficiency.

Luminaire Spacing:

For uniform lighting the spacing should not exceed twice the setback.

Ground Mounted Aiming:

The aiming point should be at least 2/3 up the building height. If the setback is reduced the aiming point must go higher.

NEMA Classification Chart

| Beam Spread Degree | NEMA Type of Designation |
|--------------------|--------------------------|
| 10 to 18° | 1 |
| 18 to 29° | 2 |
| 29 to 46° | 3 |
| 46 to 70° | 4 |
| 70 to 100° | 5 |
| 100 to 130° | 6 |
| 130° and over | 7 |

Technical Information


GENERAL

Aiming

Except for flood lights, most luminaires are mounted in a fixed position so that their vertical aiming naturally matches that shown on their isofootcandle charts. Flood light isofootcandle charts typically have an arrow that gives an aiming point on the chart and sets the vertical aiming angle. To achieve accurate results with a flood light layout, it is necessary to use the exact aiming shown on the chart during fixture installation. Any variation from the isofootcandle chart will require assistance from an Atlas Lighting Products representative to achieve good results.

Multiple Fixtures

Determining fixture spacing that gives a minimum footcandle level can be easily performed using isofootcandle charts. The use of more than one fixture will result in a change in footcandle levels and the distribution pattern. Since a multi-fixture pattern is simply an additive combination of single patterns, reasonable estimates can be made in cases where multiple fixture combinations are not available. Single fixture charts can also be overlaid with the fixtures pointed in the appropriate directions, and the footcandle values added where contours cross.

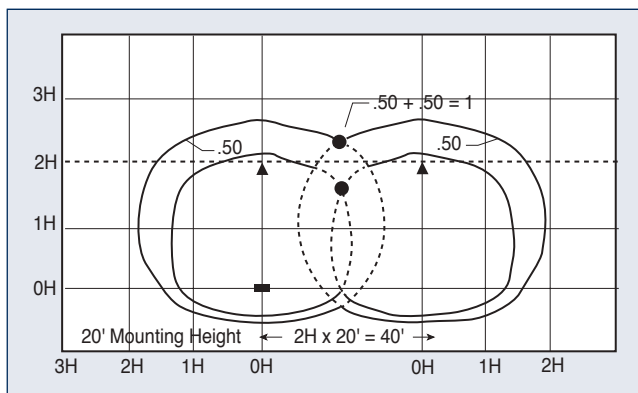


For example, if a minimum level of one footcandle between fixtures is desired, then fixture spacing should be adjusted so that touching contours have a combined minimum value of one footcandle. The same holds true regardless of the number of fixtures used.

Contact our technical service for computerized layouts.

Isofootcandle Charts

Isofootcandle charts can be used for manual layouts that give minimum footcandle levels. Fixture quantities, locations, spacing and aiming can be determined with reasonable accuracy. The grid pattern is generally based upon units of fixture mounting height.

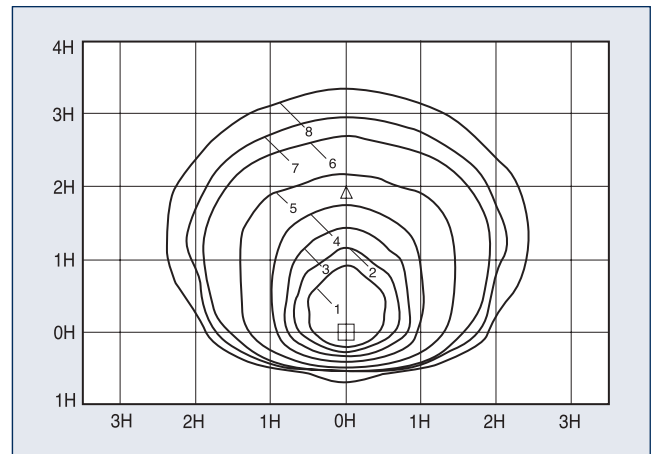

The shape and position of contours on the grid always remain the same, regardless of fixture mounting height. However, the footcandle values of the contours change when the mounting height changes. If the fixture is raised from 20 to 40 feet, the same quantity of light from the fixture will cover a larger area, so footcandle levels will be lower. Likewise, if a mounting height is lower than that indicated on the isofootcandle chart, the footcandle levels will increase. In most cases, a chart that provides footcandle values for the desired height is not shown, the following formula can be used to obtain correct footcandle values:

Multiply the existing footcandle levels shown at each contour with the new footcandle multiplier to get the correct values.

$$\frac{(\text{Old MH})}{(\text{New MH})} = \text{New Footcandle Multiplier}$$


Old MH = Mounting Height shown on chart squared
 New MH = New Mounting Height squared

Technical Information

GENERAL

Classifications

The following diagrams show a plan view of the distribution of light cast by different types of luminaires; the luminaire is represented by a black square. The arrows show the direction of the maximum intensity.

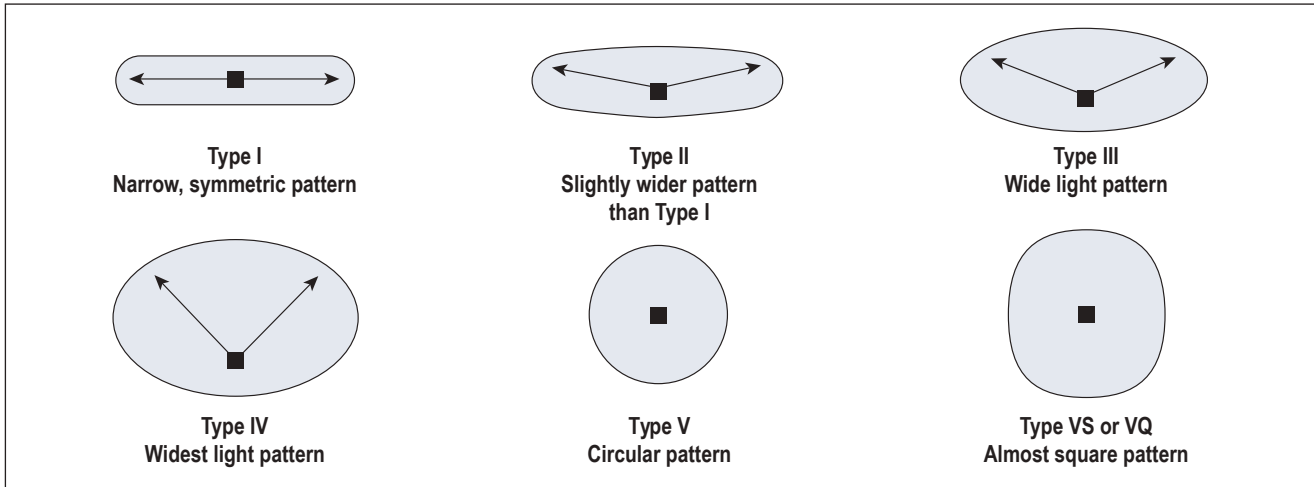


Cut Off Classifications

| | |
|--------------|---|
| Cut-Off | Intensity at 80° does not exceed 100 candelas per 1000 lamp lumens, nor 25 candelas per 1000 lamp lumens at 90° |
| Semi-Cut-Off | Intensity at 80° does not exceed 200 candelas per 1000 lamp lumens, nor 50 candelas per 1000 lamp lumens at 90° |
| Non-Cut-Off | No intensity (candela) limitations |

Sports Lighting Classifications

NEMA field angle classifications and their effective projection distances.

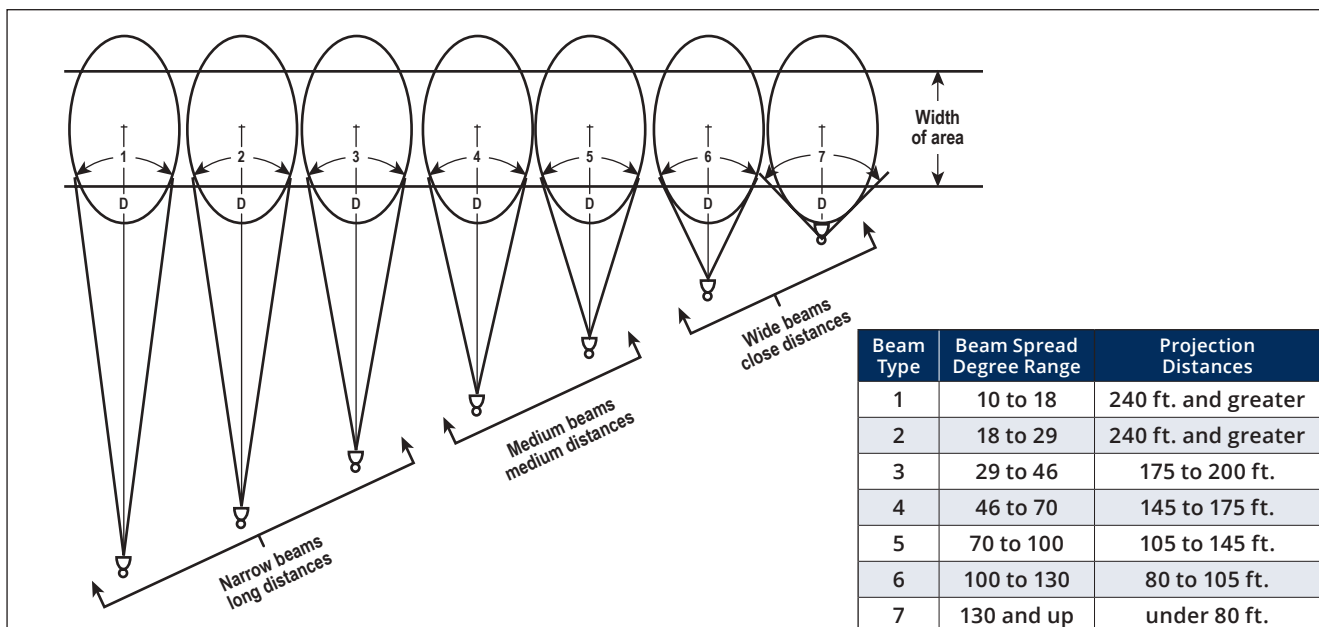


Technical Information

GENERAL

Flag Lighting

- It is recommended to use at least 2 lights, preferably 3 in a triangle around the flag pole. This will ensure the flag is well lit at rest and also when the wind is blowing in different directions
- Fixtures should be set back 1/3 the height of the pole. (Example: 30' Pole = 10' Setback)
- A flood light with a narrow beam spread is typically desired.
- Fixtures that supply an average of 10fc are recommended for low-light residential areas and 20fc for bright public areas.
- Use the Design Guidelines chart below to help determine which Atlas fixture will meet your lighting needs.

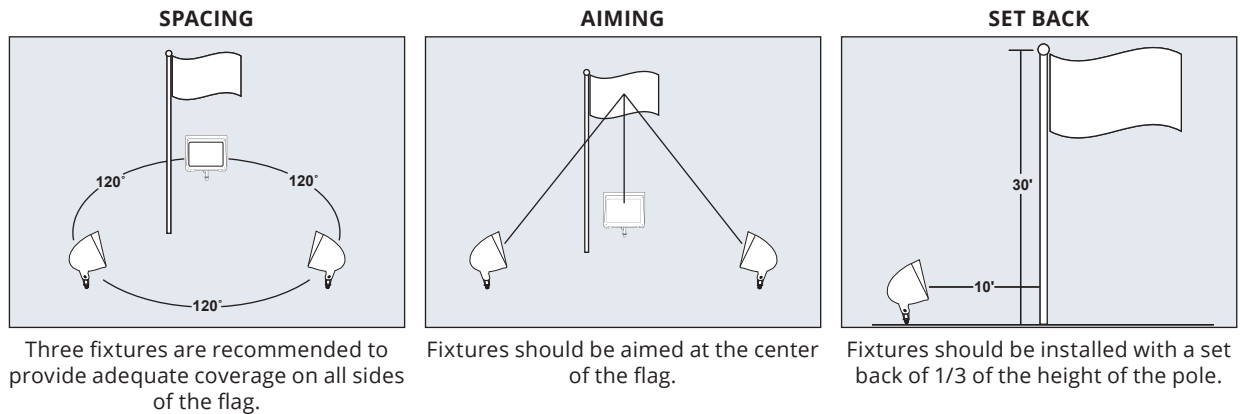

Design Guidelines

| Pole Height | Set Back | Wattage | Atlas Part # | Description |
|-------------|----------|---------|--------------|--------------------|
| 20' | 7' | 43W | PFM43LED | Medium Flood Light |
| 25' | 8' | 43W | PFM43LED | Medium Flood Light |
| 30' | 10' | 43W | PFM43LED | Medium Flood Light |
| 35' | 12' | 84W | PFL84LED | Large Flood Light |
| 40' | 13' | 84W | PFL84LED | Large Flood Light |

Mounting Base Guidelines

