

THE EOS 3.0 Mini
HIGHLIGHTS

EOS 3.0 Mini

FORM & FUNCTION



Combining clean lines and incredible technology into a compact footprint, the EOS 3.0 Mini is the newest addition to our popular EOS family. When your application calls for a sophistication, quality and versatility, the EOS family of luminaires provides an array of options to fit any environment.

LUMINAIRE SPECIFICATIONS

Efficacy: up to 138 lm/W

Choice of Optics for Pendant Direct/Indirect

Lumen Package: 375-1000 lm/ft

Distribution: Pendant Direct/Indirect


Configurations: 2ft - 8ft Individual Units or

Continuous Runs.

Fixed CCT: 27K, 30K, 35K, 40K


Tunable White: 2700K - 6500K

CRI: +84 and +92





Pendant Direct/Indirect

DIRECT OPTICS

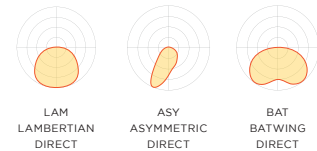

INDIRECT OPTICS



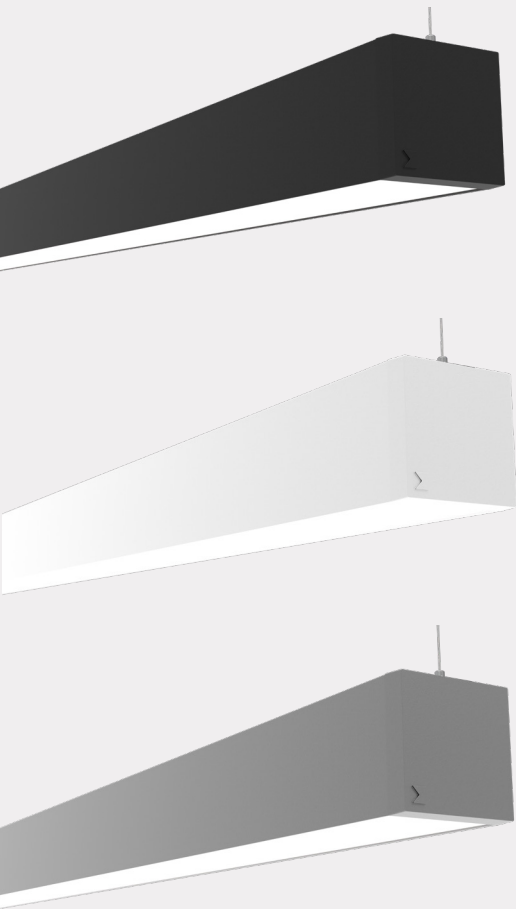

EOS 3.0 Mini OPTIONS



FINISH OPTIONS

Polyester powder, low gloss, textured paint finish applied after a multi-stage pretreatment. Standard luminaire finishes include white, silver, and black. Custom color options are available. (Consult Factory).

STANDARD FINISHES



BLACK

WHITE

SILVER

TUNABLE WHITE SOLUTIONS

Lux Illuminaire utilizes the latest sensors and controls to provide you with the options you're looking for in your lighting fixtures.

Standard 0-10v - 2 Channel Control (Optional Dim to Warm and Optional Blue Tooth Enabled)

Lutron T-Series 2-Channel Driver pairs with Lutron's Quantum System

OSRAM Tunable White Standalone Solution with OSRAM Wall Station

OSRAM 2-Channel Tunable White LED Driver, Dexal Driver with Optional DALI mode (58287)

DRIVER SPECIFICATIONS

All of our luminaires come standard with 1% dimming and THD <20% utilizing 0-10v constant current protocol. 120v/277v is standard with the option of 347v.



LU  ILLUMINAIRE