


Century w/ Aluminum Base - 8.25"

- Available in LED & GU24
- Ceiling Mount
- Molded of Durable Non-Corrosive UV Resistant Resins with Aluminum Base
- UL Listed for Damp Locations

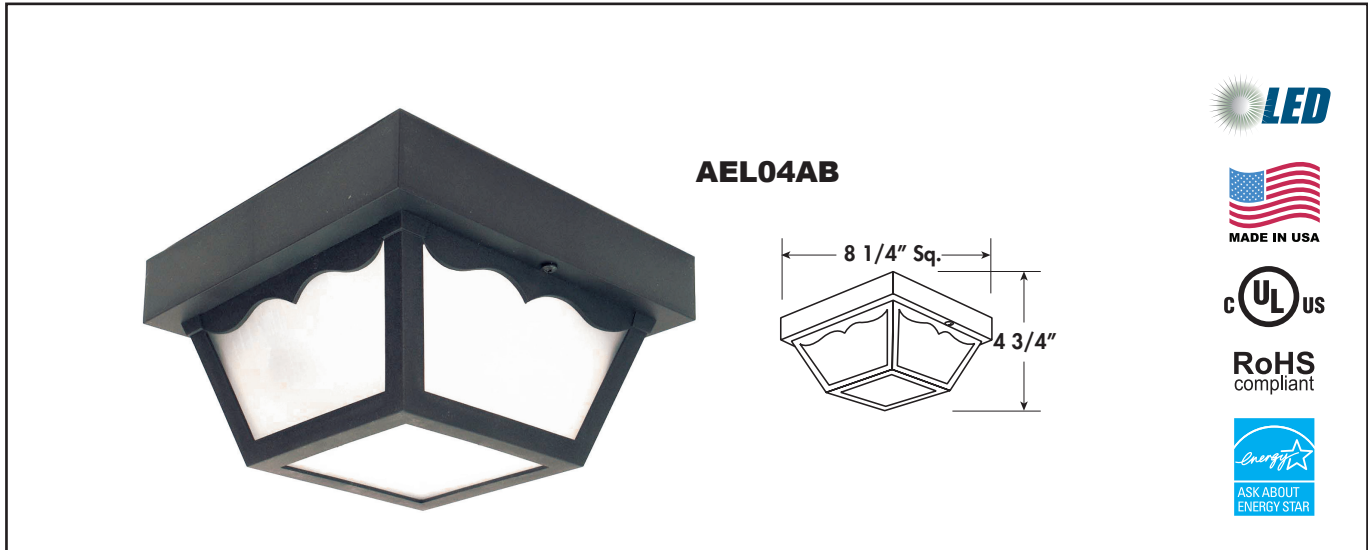

EXAMPLE # AEL04AB-LE800C-BFP

SERIES #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS	
AEL04AB	LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W-White B- Black	POLYPROPYLENE F-Frosted GLASS G-Clear	P-Photocell	
	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**				W-900lm 3000K C-1000lm 4000K
	LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				W-1350lm 3000K C-1400lm 4000K
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR	W-White B- Black	POLYPROPYLENE F-Frosted GLASS G-Clear	P-Photocell	
	L900 - 11.3W Power Input CRI 74 (TYP) >80 Lumens Per Watt**				C-912lm 4000K
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W G23-1 X 23W G26-1 X 26W or 27W	W-White B-Black	POLYPROPYLENE F-Frosted GLASS G-Clear	P- Photocell L-CFL, 2700K	

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

AEL -- Advantage Environmental Lighting

Address: 917 West Mayfield, Suite 103
Arlington, TX 76015
Phone: 817-468-3591
Email: info@aelnow.com

Specifications are subject to change without notice.

Catalog #	
Project	
Date	
Type	