


- Available in LED & Incandescent
- White Powder Coated Aluminum
- Wall or Ceiling Mount
- UL Listed for Wet Locations

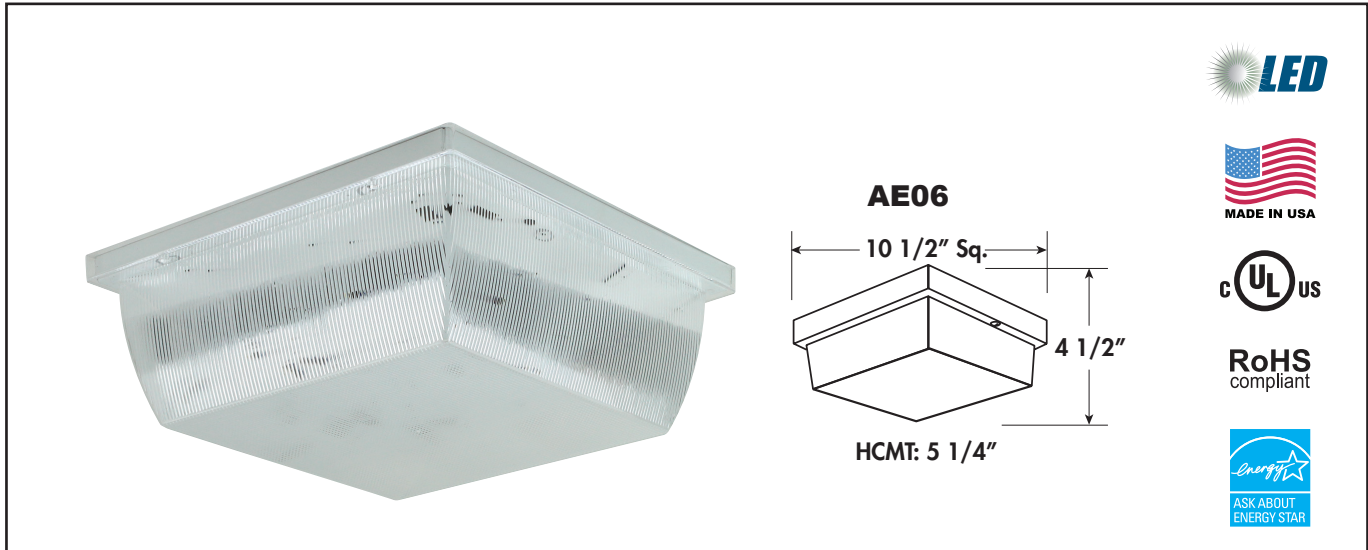

EXAMPLE # AE06-LE800W-WFM

SERIES #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
AE06	LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W-White	ACRYLIC F-Glare Reduced Frost Prismatic	M-Motion Sensor
	<p>LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**</p> <p>LE1200 - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**</p> <p>LE1800 - 23W Power Input CRI 80 (TYP) >80 Lumens Per Watt**</p>			
	INCANDESCENT, MEDIUM BASE, 120V I240-2 X 40W Max	W-White	ACRYLIC F-Glare Reduced Frost Prismatic	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE-A19/E26, 2700K LCE-A19/E26, 4000K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST **ESTIMATED FROM LED SOURCE

AE -- Advantage Environmental Lighting

Address: 301 East Risinger Rd.
Bldg. 109
Fort Worth, TX 76015
Phone: 817-468-3591
Email: info@aelnow.com

Specifications are subject to change without notice.

Catalog #	
Project	
Date	
Type	