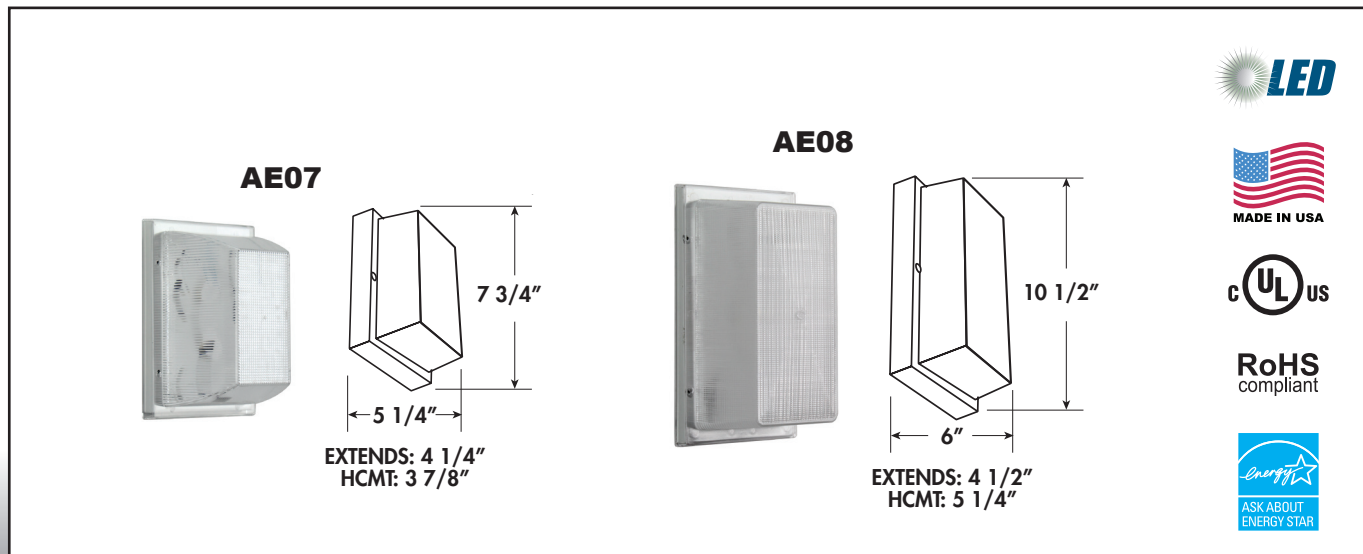


- Available in LED & Incandescent
- White Powder Coated Aluminum
- Wall or Ceiling Mount
- UL Listed for Wet Locations


EXAMPLE # AE07-I40-WF-LCE

SERIES#	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
AE07 AE08	LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W-White	ACRYLIC F -Glare Reduced Frost Prismatic POLYCARBONATE P -Polycarbonate Clear	N/A
	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**			
	INCANDESCENT, MEDIUM BASE, 120V I40-1 X 40W Max	W-White	ACRYLIC F -Glare Reduced Frost Prismatic POLYCARBONATE P -Polycarbonate Clear	LED LAMP, 3 YEAR WARRANTY DIMMABLE, ENERGY STAR LWE -A19/E26, 2700K LCE -A19/E26, 4000K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

Advantage Environmental Lighting

 Address: 301 E. Risinger Rd. Bldg. 109
 Fort Worth, TX 76140
 Phone: 817-468-3591
 Email: info@aelnow.com

Specifications are subject to change without notice.

Catalog #	
Project	
Date	
Type	