


- o Available in LED & GU24
- o Molded of Durable Non-Corrosive UV Resistant Resins with Powder Coated Aluminum Base
- o Wall Mount Only
- o UL Listed for Wet Locations

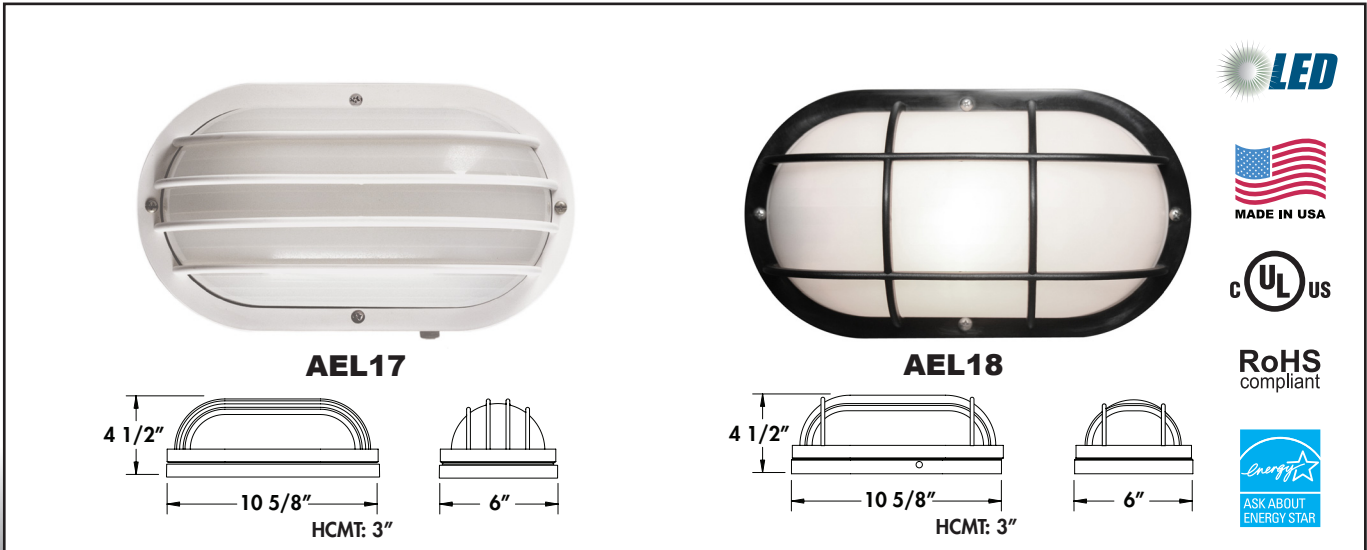

EXAMPLE # AEL17-LE800W-BFP

SERIES#	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
AEL17 AEL18	LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR LE800 - 13W Power Input W-900lm 3000K CRI 80 (TYP) C-1000lm 4000K >65 Lumens Per Watt**	W-White B- Black	POLYCARBONATE F-Frosted	P-Photocell
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR L900 - 11.3W Power Input C-912lm 4000K CRI 74 (TYP) >80 Lumens Per Watt**	W-White B- Black	POLYCARBONATE F-Frosted	P-Photocell
	GU24 BASE, 120V G13-1 X 13W G213- 2 X 13W G18-1 X 18W G23-1 X 23W G26-1 X 26W or 27W	W-White B- Black	POLYCARBONATE F-Frosted	L-CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

AEL -- Advantage Environmental Lighting

Address: 917 West Mayfield, Suite 103
Arlington, TX 76015
Phone: 817-468-3591
Email: info@aelnow.com

Specifications are subject to change without notice.

Catalog #	
Project	
Date	
Type	