


- Available in LED & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins with Powder Coated Aluminum Base
- Wall or Ceiling Mount
- UL Listed for Wet Locations

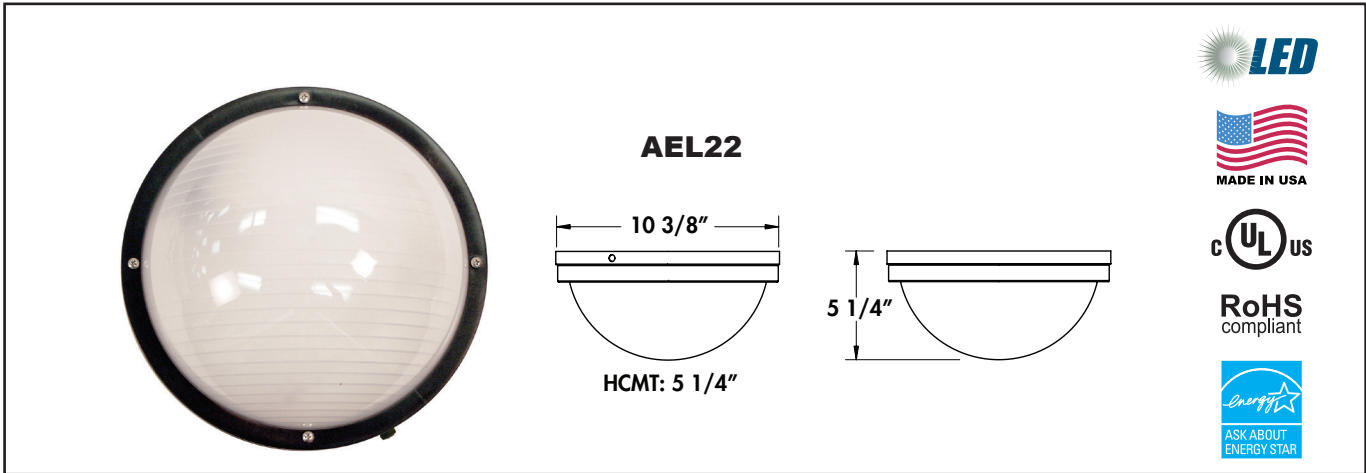

**EXAMPLE # AEL22-LE800C-BFP**

SERIES#	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS	
<b>AEL22</b>	<b>LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR</b>	<b>W-White</b> <b>B- Black</b>	<b>POLYCARBONATE</b> <b>F-Frosted</b>	<b>P-Photocell</b>	
	<b>LE800</b> - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**				<b>W-900lm 3000K</b> <b>C-1000lm 4000K</b>
	<b>LE1200</b> - 14W Power Input CRI 80 (TYP) >80 Lumens Per Watt**				<b>W-1350lm 3000K</b> <b>C-1400lm 4000K</b>
	<b>MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR</b>	<b>W-White</b> <b>B- Black</b>	<b>POLYCARBONATE</b> <b>F-Frosted</b>	<b>P-Photocell</b>	
<b>L1800</b> - 22W Power Input CRI 74 (TYP) >82 Lumens Per Watt**	<b>C-1824lm 4000K</b>				
	<b>GU24 BASE, 120V</b> <b>G13-1 X 13W</b> <b>G213- 2 X 13W</b> <b>G18-1 X 18W</b> <b>G218- 2 X 18W</b> <b>G23-1 X 23W</b> <b>G26-1 X 26W or 27W</b>	<b>W-White</b> <b>B-Black</b>	<b>POLYCARBONATE</b> <b>F-Frosted</b>	<b>P-Photocell</b> <b>L-CFL, 2700K</b>	

\*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

\*\*ESTIMATED FROM LED SOURCE

**AEL -- Advantage Environmental Lighting**

Address: 917 West Mayfield, Suite 103  
 Arlington, TX 76015  
 Phone: 817-468-3591  
 Email: info@aelnow.com

Specifications are subject to change without notice.

<b>Catalog #</b>	
<b>Project</b>	
<b>Date</b>	
<b>Type</b>	