


- Available in LED, Incandescent & GU24
- Molded of Durable Non-Corrosive UV Resistant Resins
- Fits Most 3" Diameter Posts
- UL Listed for Wet Locations
SHADE DIA

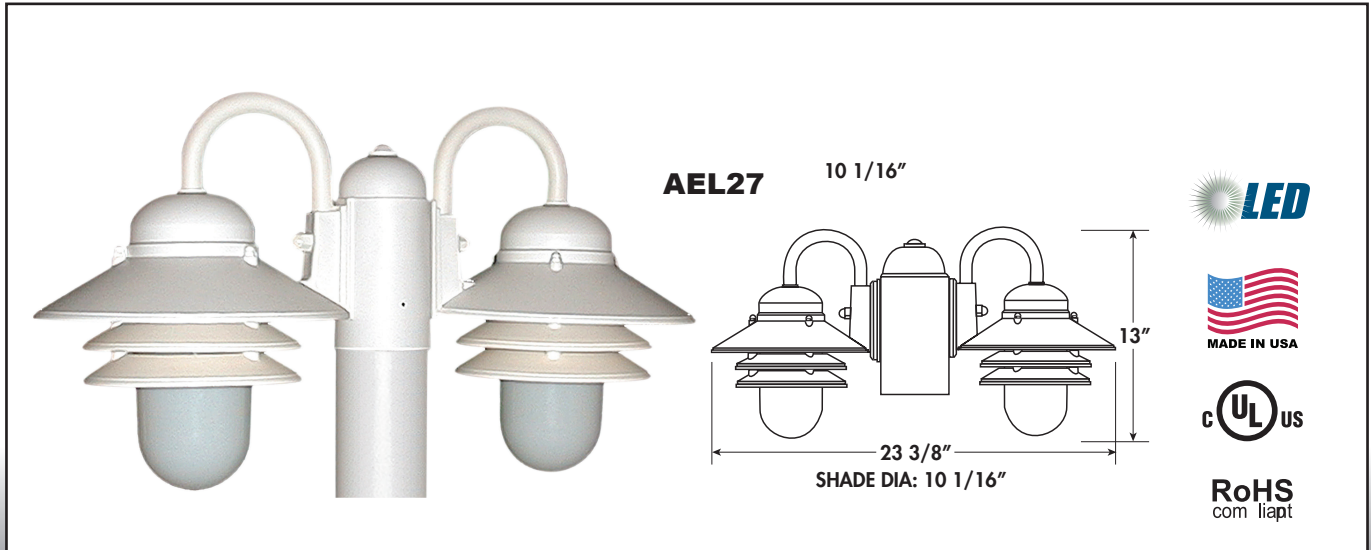

RoHS
com liapt

EXAMPLE # AEL27-I260-BW-PLWE

SERIES#	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
AEL27	LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C TO +40°C, 5 YEAR WARRANTY, DIMMABLE LE1600 - 2 X 13W Power Input W -1800lm 3000K CRI 80 (TYP) C -2000lm 4000K >65 Lumens Per Watt**	W -White B - Black	ACRYLIC C -Clear Prism W -White	P -Photocell
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY L1800 - 22W Power Input C -1824lm 4000K CRI 74 (TYP) >82 Lumens Per Watt**	W -White B - Black	ACRYLIC W -White	P -Photocell
	INCANDESCENT, MEDIUM BASE, 120V I260 - 2 X 60W	W -White B - Black	POLYCARBONATE C -Clear Prism W -White	P -Photocell LED LAMP, 3 YEAR WARRANTY, DIMMABLE LW -A19/E26, 2700K LC -A19/E26, 4000K
	GU24 BASE, 120V G213 -2 X 13W G218 -2 X 18W G223 -2 X 23W	W -White B - Black	ACRYLIC C -Clear Prism W -White	L -CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

AEL -- Advantage Environmental Lighting

Address: 917 West Mayfield, Suite 103
Arlington, TX 76015
Phone: 817-468-3591
Email: info@aelnow.com

Specifications are subject to change without notice.

Catalog #	
Project	
Date	
Type	