


AE28 Nautical Wall Mount

- Available in LED, Incandescent & GU24
- Fade & Rust Resistant Composite Construction
- Wall Mount Only
- UL Listed for Wet Locations

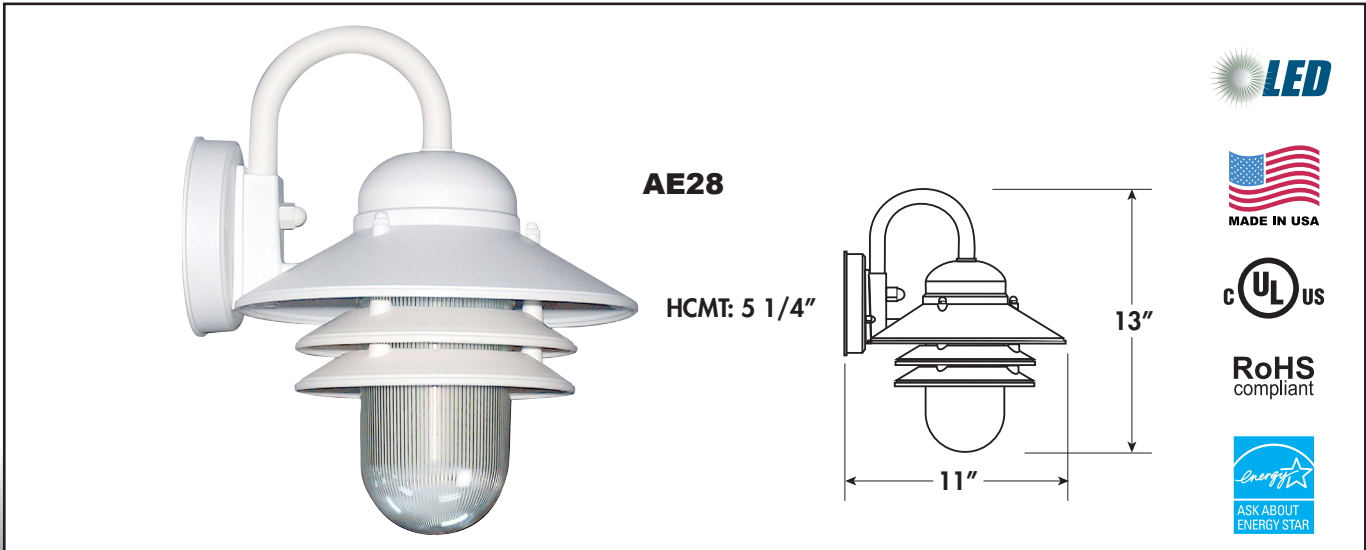

EXAMPLE # AE28-I60-BW-PLWE

SERIES #	LIGHT SOURCE	BODY	DIFFUSER	OPTIONS
AE28	LED 120V AC, 50/60 Hz, HPF, 50,000 HRS L70*, AMBIENT OP TEMP -40°C, TO +40°C 5 YEAR WARRANTY, DIMMABLE, ENERGY STAR	W-White B- Black	ACRYLIC C-Clear Prism W-White	P-Photocell
	LE800 - 13W Power Input CRI 80 (TYP) >65 Lumens Per Watt**	W-900lm 3000K C-1000lm 4000K		
	MULTI-VOLT LED 120-277V, 50/60 Hz, CONSTANT CURRENT AT 700mA, DRIVER UL CLASS 2, HPF, THERMALLY PROTECTED ARRAY, 50,000 HRS L70* AMBIENT OP TEMP -40°C TO +40°C, 3 YEAR WARRANTY, ENERGY STAR	W-White B- Black	ACRYLIC C-Clear Prism W-White	
	L900 - 11.3W Power Input CRI 74 (TYP) >80 Lumens Per Watt**	C-912lm 4000K		
	INCANDESCENT, MEDIUM BASE, 120V I60-1 X 60W	W-White B- Black	POLYCARBONATE C-Clear Prism W-White	P-Photocell LED LAMP, 3 YEAR WARRANTY, DIMMABLE ENERGY STAR LWE-A19/E26, 3000K LCE-A19/E26, 4000K
	GU24 BASE, 120V G13-1 X 13W G18-1 X 18W	W-White B- Black	ACRYLIC C-Clear Prism W-White	P-Photocell L-CFL, 2700K

*DATA PER LM79/LM80/TM21 AVAILABLE UPON REQUEST

**ESTIMATED FROM LED SOURCE

Advantage Environmental Lighting

Address: 301 E Risinger Rd. Bldg 109
 Fort Worth, TX 76140
 Phone: 817-468-3591
 Email: info@aelnow.com

Specifications are subject to change without notice.

Catalog #	
Project	
Date	
Type	