

BAT

LED Recessed Wall Mount Step-Light



STANDARD

OPTIONAL



SPECIFICATIONS

DESCRIPTION

The BAT is an LED prison grade recessed wall mount. This durable, vandal proof fixture is the perfect solution for areas such as prison cells, holding cells, restrooms, behavioral health facilities, hallways, corridors, and anywhere that needs a prison grade recessed wall mount.

CONSTRUCTION

Various door materials available. If additional options are needed, please consult factory.

FASTENERS

Torx® Head with center pin security fasteners standard. Allenhead w/ center pin security fasteners available with option "AH".

ELECTRICAL SYSTEM

Electronic driver 0-10V dimming standard. Long-life LED system rated for >100K hours (L70 @ 25°C). Complies with federal energy efficiency

OPTICAL SYSTEM

Lens per specification (see options) and secured with heavy duty lens retention system.

LISTINGS

UL and cUL listed for damp locations.

MOUNTING

Recessed wall mount.

LED

80 CRI or 90 CRI LEDs available in 3000K, 3500K, 4000K, 5000K, Red, Blue, and Amber.



WARRANTY

5 - Year Limited Warranty. Complete warranty and terms located at: www.aelnow.com/warranty

Output	Est. Lumens White	Est. Lumens R/B/A	System Wattage
S	35	30	.25
M	75	64	.45
H	100	86	.72

* Delivered white lumens shown were tested with 4000K LEDs

Approximate Color Temperature Multiplier	
5000K	1.03
4000K	1
3500K	0.97
3000K	0.94
2700K	0.91

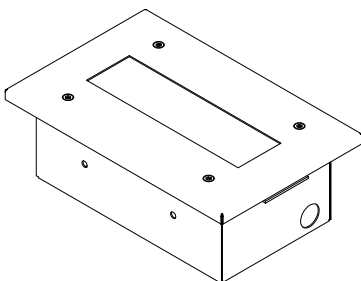

Series	CCT	Output	Housing	Door Type
BAT	30	3000K	B14	Cold Roll 14 Gauge Steel
	35	3500K	B16	Cold Roll 16 Gauge Steel
	40	4000K	B18	Cold Roll 18 Gauge Steel
	50	5000K	B20	Cold Roll 20 Gauge Steel
	R	Red LED	SH14	Stainless Steel 14 Gauge
	B	Blue LED	SH16	Stainless Steel 16 Gauge
	A	Amber LED	SH18	Stainless Steel 18 Gauge
		S	Standard	
		M	Medium	
		H	High	

Inner Lens		Outer Lens		Voltage	Options
N	No Lens	N	No Lens	M	Multi-Volt (120/277V)
125C	.125 Pris. Acrylic	125P	.125 Clear Poly.	AM	Anti-Microbial Paint
CP25	.125 Pris. Poly.	156P	.156 Clear Poly.	LDE1	Lutron Hi-lume 1% Ecosystem LED driver with Soft-on, Fade-To-Black Dimming Driver
CP56	.156 Pris. Poly.	187P	.187 Clear Poly.	90	90 CRI
CP87	.187 Pris. Poly.	25P	.250 Clear Poly.	AH	Allenhead w/ Center Pin Fasteners
TG	.156 Pris. Temp. Glass	375P	.375 Clear Poly.		
156C	.156 Pris. Acrylic	F1	.187 Clear Temp.Glass		
G2	.140 DR Acrylic	G1	.250 Clear Temp.Glass		
H2	.125 White Frosted Polycarbonate	H1	.375 Clear Temp.Glass		

DIMENSIONS

