

CAX5LU

Chicago Approved Steel LED Exit Sign

STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- Single or double face configurations.

ELECTRICAL

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable Ni-Cd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on backplate for wall mount.

HOUSING


- 20-gauge steel housing.
- Neutral white finish.



WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- UL listed for damp locations (0°-50°C/32°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

DIMENSIONS

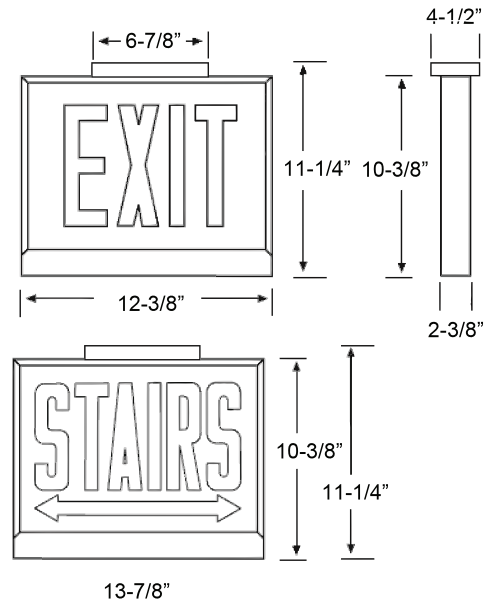

ORDERING INFORMATION

Sample Part Number: **CAX5LU-2-R-W-EM-NA**

Model	No. of faces	Letter	Housing	Battery	Signage / Directional Arrows
CAX5LU	1 Single Face	R Red	W White	Blank AC only	NA Exit No Arrow
	2 Double Face		B Black	EM Ni-Cd battery	SWNA Stairs No Arrow DA Exit Double Arrow SWDA Stairs Double Arrow RA ¹ Exit Right Arrow SWRA ¹ Stairs Right Arrow LA ¹ Exit Left arrow SWLA ¹ Stairs Left Arrow LARA ² Exit Left/Right Arrow SWLARA ² Stairs Left/Right Arrow

Notes:
 1. Available in single face configuration only
 2. Available in double face configuration only



CAX5LU
Chicago Approved Steel LED Exit Sign

ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
All Models	5.0	5.0	0.10A	0.05A

ARROW CONFIGURATION

