

## CDIL


Lay-In Center Basket Direct/Indirect



STANDARD | OPTIONAL



### FIXTURE DIMENSIONS

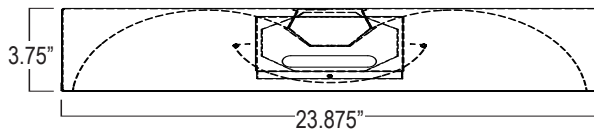

### ORDERING INFORMATION

Example: CDIL2-2-17-DE-LED-10-40-FA

### PRODUCT SPECIFICATIONS

#### DESCRIPTION

The CDIL Series is a Lay-In Center Basket wired For or With LED tubes Direct/Indirect fixture available in 2x2, and 2x4 body sizes. It was designed for standard T-Grid applications. Provides soft, balanced lighting for a comfortable light environment and contemporary appearance.

#### APPLICATIONS

The CDIL Series were designed to be high quality, energy efficient fixture for use in commercial applications, offices, government facilities, schools, and public areas.

#### CONSTRUCTION

The fixture is constructed of a heavy gauge steel body. Housing embossed for maximum rigidity. Rounded side flanges for safe handling. Ballast Cover snaps into housing to cover ballast and wires.

#### OPTICAL SYSTEM

White polyester polymer finish with a minimum 93% reflectivity. Center basket available with a white perforated metal basket with white opal acrylic diffuser inlay or high transmission white frost acrylic basket.

#### ELECTRICAL SYSTEM

120/277V applications

#### MOUNTING

The fixture can be recess mounted in either a standard grid ceiling. Flange Kits available for sheet rock installations (see Options).

#### LISTINGS

UL and cUL Listed. Damp location rated.

#### WARRANTY

5-Year Limited Warranty. Complete warranty and terms located at [www.aelnow.com/warranty](http://www.aelnow.com/warranty).

SERIES	NUMBER OF LAMPS	LAMP REPLACEMENT	WIRE APPLICATION	LED
CDIL2 2x2	1 1 Lamps	17 17W T8	BLANK SINGLE END WIRING*	LED WIRED FOR LED LAMPS
CDIL4 2x4	2 2 Lamps	28T8 28W T8	DE DOUBLE END WIRING**	WT WITH TUBES INCLUDED
	3 3 Lamps	28T5 28W T5		
		32 32W T8		
		54 54W T5HO		

WT WATTAGE OPTIONS	COLOR TEMP	BASKET	OPTIONS
10 10 Watt 24" or 36"	35 3500K	(BLANK) Perforated White Basket	12EBL 90 minute 1200 Lumen Emergency
12 12 Watt 48"	40 4000K	FA Frosted Acrylic	FB1 Internal Fast-Blow Fuse
15 15 Watt 36" or 48"	50 5000K		SB1 Internal Slow-blow Fuse
18 18 Watt 48"			CD Continuous Dimming
20 20 Watt 48"			SD Step Dimming
			CD5 Continuous Dimming
			SD5 Step Dimming
			FW 6' Flex Whip
			FK22 2X2 Flange Kit
			FK24 2x4 Flange Kit