



# Advantage Environmental Lighting

## EM10

### PAR-Type Lamp Head Emergency Unit



#### STANDARD



#### OPTIONAL



#### ILLUMINATION

- Two fully adjustable 5.4W glare free PAR-type lamp heads.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.

#### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable Sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

#### MOUNTING

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
- Top and side knockout for conduit applications.
- Suitable for wall or ceiling mount.

#### HOUSING

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.


#### OPTIONS

- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

#### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for damp locations. (0°C – 50°C)

#### DIMENSIONS

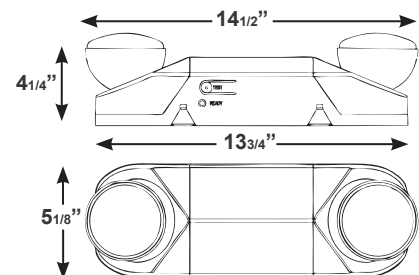

#### ORDERING INFORMATION

Sample Part Number: **EM10**

Special Voltage options available.  
Check with your AEL representative.

Model	Housing Color	Options
EM10	Blank White B Black	USA Assembled in the USA

T (817) 468-3591

E [info@aelnow.com](mailto:info@aelnow.com)

[www.aelnow.com](http://www.aelnow.com)

Specifications subject to change without notice.



# Advantage Environmental Lighting

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EM10	3.6	5.5	0.034	0.017

---

## CENTER-TO-CENTER SPACING GUIDELINES

Consult factory for details.

MAY 22, 2018

T (817) 468-3591

E [info@aelnow.com](mailto:info@aelnow.com)

[www.aelnow.com](http://www.aelnow.com)

Specifications subject to change without notice.