

## Features & Benefits

Sealed Die-Casting Aluminum Housing with Stainless Steel Fasteners

Pendant Mounting or Direct Surface Mounting

PIR Sensor and Emergency Battery Available

UL Listed for Wet Locations

Pendant mounting or direct surface mounting

5-year limited warranty



### Housing

One piece die cast housing better waterproofing, suitable for both indoor and outdoor application.

### Mounting Bracket

Suitable for J-BOX mounting, and easy for installation, also support pendant mounting, wires coming out from the back for easier wire connections.



### Photometry

Parking Garage Photometry and polycarbonate optical lens with heat resisting.

### 1/2inch threaded hole

Support wires coming from the hole for easier wire connections. Optional PIRsensor and Emergency Battery.

## Technical Parameters

Power	Light Output	Power Input	Operating Temperature	Efficacy
27W - 60W	3,750 - 8,000 lm	120-277V, 347/480V	-40°F- 104°F	Up to 141av lm/W
Color Temperature	CRI	Certifications	Dimming	Motion Sensor
4000K, 5000K	70 CRI	UL, DLC Premium	1-10V Dimming	Bi-Level PIR Sensor
Emergency Battery	Surge Protection	Finish		
8W 900 lm	10k	DB, W		

## Performance Data

5000K		
LED Watts	Lumens	LPW
27W	3,800 lm	141 lm/W
40W	5,450 lm	136 lm/W
60W	8,000 lm	133 lm/W

4000K		
LED Watts	Lumens	LPW
27W	3,750 lm	139 lm/W
40W	5,350 lm	134 lm/W
60W	7,800 lm	130 lm/W


## Ordering Information *Example: CPGX-40W-50K*

(Optional)


Model	Wattage	Voltage	CCT	Finish	Dimmable	Controls
<b>CPGX</b> Canopy CPGX Series	27W 40W 60W	<b>Blank</b> 120-277V	<b>40K</b> 4000K <b>50K</b> 5000K	<b>Blank</b> Dark Bronze <b>W</b> White	<b>Blank</b> Non Dimmable <b>D</b> 0-10V Dimmable	<b>M</b> Motion Sensor <b>EM</b> Emergency Battery <b>MEM</b> Motion Sensor + Emergency Battery

Note: Motion Sensor & Emergency Battery require 0-10V Dimmable Driver

## Product Dimensions

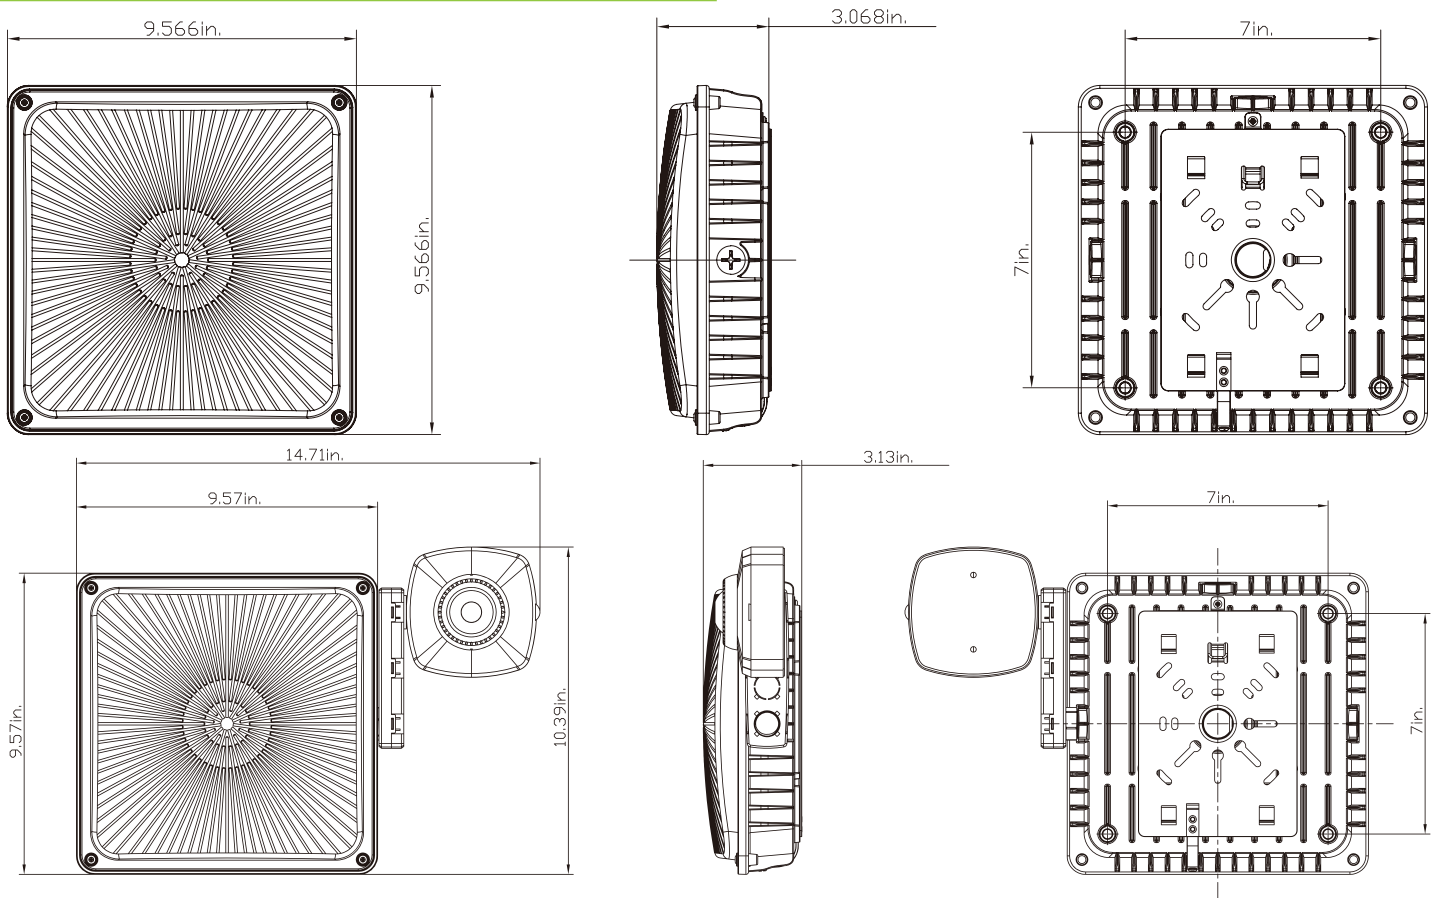

## Photometrics

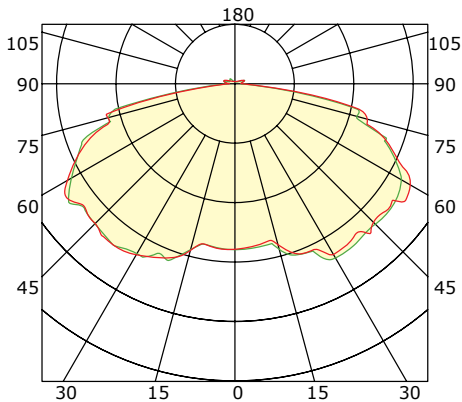

## DLC Listed Models

System Watt	Voltage	CCT	DLC NO	DLC Classification
27W	120-277V	5000K	CPGX-27W-50K-[Blank,W]-D-[Blank,M,EM,MEM]	Premium
40W	120-277V	5000K	CPGX-40W-50K-[Blank,W]-D-[Blank,M,EM,MEM]	Premium
60W	120-277V	5000K	CPGX-60W-50K-[Blank,W]-D-[Blank,M,EM,MEM]	Premium

Note: Only Above Models are Currently DLC Listed