



Features & Benefits

Dark Bronze Polyester Powder-Coat Finish Robust Gound Cage Pre-Buried Installation 360 Degrees Surround Ilumination with 80 CRI 1-10V Dimming and Projected over 50,000 hrs life span 3.5 Ft Height Optional Emergency Function for Emergency Needs 5 Year Limited Warranty



Annular diffuser Glow soft light around.

Emergency Battery

Emergency battery pack would provide the necessary brightness in emergency situations. Applicable ambient temperature is 10C (50F) to 40C (104f).



Gather light and make the coverage of the light larger.

Lamp bollard

Round appearance for good decorative effect and harmony with various garden scenes.

Technical Parameters


Power	Light Output	Power Input	Operating Temperature	Efficacy
26W	3,000 lm - 3,100 lm	120-277V	-40°F - 131°F	Up to 115 lm/W

Color Temperature	CRI	Certifications	Emergency Battery	Finish
4000K, 5000K	80 CRI	UL	8W, 900 lm	DB, B, W

Performance Data

5000K					
LED Watts	Size	Lumens	LPW		
26W	3.5FT	3.300 lm	127 lm/W		

4000K					
LED Watts	Size	Lumens	LPW		
26W	3.5FT	3,100 lm	119 lm/W		

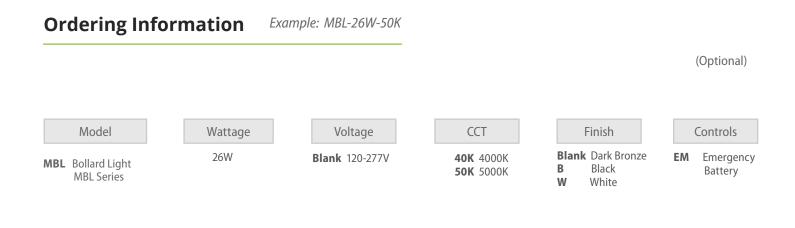



Product Dimensions

