

Unterlinden wall 3000K aluminum

1097018A

SPECIFICATIONS



Design By

Herzog & De Meuron

Collection

Design



Specifications

Delivered lumens	416lm
Light output ratio	52lm/W
Power consumption	8W
Led type	5.8W C.O.B.*
CCT (Correlated Color Temperature)	3000K
CRI (Color Rendering Index)	>90
Life expectancy	105000Hrs
Control type	Dimmable (On Cord)
Input Voltage	120-240V
Driver	Plug-In

*Integrated light source

Colors & Finishes

- Aluminum (diffuser)
- Black (body)


Materials

- Head and holder in die-cast aluminum
- Arm in steel

Features & Accessories

- Adjustable head height
- Rotatable arm
- Interchangeable plug options accommodate most electrical outlets for global diversity

Dimensions

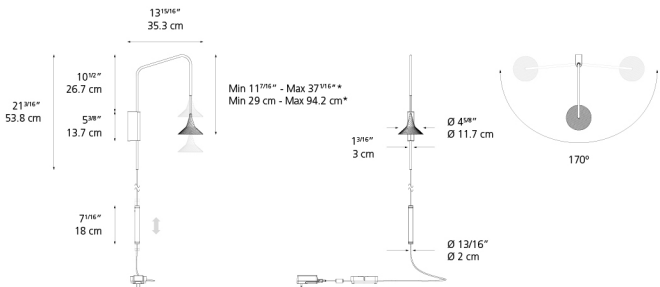

*with a minimum of 48" of wire for plug

Packaging


1 Box

Light distribution

Direct

Luminaire weight

0 lbs / 0 kg



Red = Max Cd. Through Vertical plane
Blue = Max Cd. Through Horizontal plane

Warranty