

The AtLite Rival Series is a complete family of exit and emergency lighting fixtures that have been designed to offer both performance and value. All products listed in this brochure are UL listed and approved for use in New York City.

When placing your next order, look no further than AtLite, the brand with the largest product offering and most reliable name for exit and emergency lighting in New York!




The Rival Series A quality line of NYC Approved emergency lighting.

Rival Series -Edge-Lit Exits

Features:

- Anodized Aluminum Housing/Faceplate
- Clear Acrylic Panel¹
- Dual Voltage Input 120/277 VAC, 60 Hz
- Long-Life, Energy Efficient
- Sealed Nickel Cadmium **Batteries with 15 Year Life** Expectancy²
- UL Damp Location Listed (Indoor)
- Universal, Field Installed Chevrons
- · Ceiling, Wall or End Mounting³




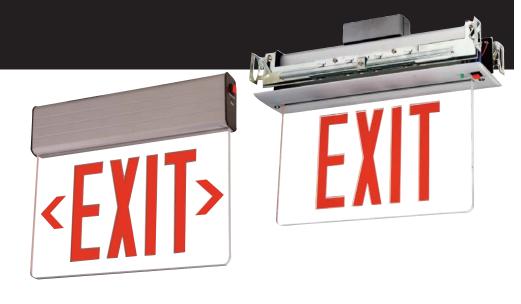

Dimensions⁴


Surface


REUS Series



Recessed


REUR Series





Ordering Information

Sample Number: REURNR



Energy Data:

Input Power:

120V = 3W

277V = 3W

Input Current (Max.):

120V = .025A277V = .011A ¹ Single face = clear background; Double face = mirrored background.

Nickel Cadmium batteries include a 15 year pro-rata warranty.
 Surface Version (Recessed Edge-Lit only available for accessible ceiling mounting).

⁴ Dimensions for 8" letter sign.



Rival Series -Die Cast Exits

Features:


- Die Cast Aluminum Housing with Canopy
- Brushed Aluminum Face
- Dual Voltage Input 120/277 VAC, 60 Hz
- Long Life, Energy Efficient LEDs
- Premium Sealed Nickel Cadmium Batteries with 15 Year Life Expectancy¹
- UL Damp Location Listed (Indoor)
- Universal, Field Selectable Chevrons
- Ceiling, Wall, End Mounting





Dimensions

Ceilng




End



Ordering Information

Sample Number: RXDN8R1



Energy Data:

Input Power:

120V = 2.3W277V = 2.7W

Input Current (Max.):

120V = .025A277V = .012A

¹ Nickel Cadmium batteries include a 15 year pro-rata warranty.



Rival Series -Steel Exit Signs

Features:


- Heavy Duty 20 Gauge Steel Housing with Canopy
- White Powder Coat Finish
- Dual Voltage Input 120/277 VAC, 60 Hz
- Long-Life, Energy Efficient LEDs
- Sealed Nickel Cadmium Batteries with 15 Year Life Expectancy¹
- UL Damp Location Listed (Indoor)
- Universal, Field Selectable Chevrons
- Ceiling, Wall, End Mounting






Dimensions

Ceilng




End



Ordering Information

Sample Number: RXSN8RU



Energy Data:

Input Power:

120V = 5W 277V = 5W

Input Current (Max.):

120V = .041A

277V = .018A



Rival Series -

Steel Combo (Exit Sign & Emergency Light)


Features:

- Heavy Duty 20 Gauge Steel Housing
- White Powder Coat Finish
- Dual Voltage Input 120/277 VAC, 60 Hz
- Long Life, Energy Efficient LEDs (Exit)
- Three Powerful 12W Incandescent Lamps (Emergency Heads)
- 36W Sealed Lead Calcium Batteries with Available Remote Capacity¹
- UL Damp Location Listed (Indoor)
- Universal, Field Selectable Chevrons






Dimensions



Ordering Information

Sample Number: RCS8R-3



Energy Data:

Input Power:

120V = 12.7W 277V = 14.3W

Input Current (Max.):

120V = .115A277V = .056A ¹ Lead Calcium batteries include 5 year pro-rata warranty, 12W remote capacity available with (2) 12W lamps attached to fixture.



Rival Series -

Steel Emergency Lights

Features:

- Heavy Duty 20 Gauge Steel Housing
- White Powder Coat Finish
- Dual Voltage Input 120/277 VAC, 60 Hz
- Available in both 6V and 12V Models
- Powerful Incandescent Lamping
 - 6REL18 includes (2) 9W Heads
 - 6REL27 includes (2) 12W Heads
 - 12REL50-3 includes (3) 12W Heads
- Dependable Sealed Lead Calcium Batteries¹
- UL Damp Location Listed (Indoor)



Energy Data:

6REL18:

Input Power:

120V = 7.1W

277V = 8.0W

Input Current (Max.):

120V = .066A

277V = .031A

6REL27:

Input Power:

120V = 7.1W

277V = 8.0W

Input Current (Max.):

120V = .066A

277V = .033A

12REL50-3:

Input Power:

120V = 7.0W

277V = 8.4W


Input Current (Max.): 120V = .165A

277V = .072A




Dimensions

6REL18 / 6REL27




12REL50-3



Ordering Information

Sample Number: 6REL18



¹ Lead Calcium Battery(s) include a 5 year pro-rata warranty.



AtLite

100 Andrews Road Hicksville, NY 11801-1704

P: 800-209-6357 F: 800-382-1391

Cooper Lighting

Customer First Center 1121 Highway 74 South Peachtree City, GA 30269

P: 770-486-4800 F: 770-486-4801

www.cooperlighting.com

International Sales, USA

Cooper Lighting 1121 Highway 74 South Peachtree City, GA 30269

P: 770-486-4800 F: 770-486-4801

Canada

Cooper Lighting 5925 McLaughlin Road Mississauga, Ontario L5R 1B8

P: 905-507-4000 F: 905-568-7049

The Cooper Lighting Family

Halo
Metalux
Lumark
Sure-Lites
Neo-Ray
Corelite
Portfolio
Iris
Shaper
io
Lumière

McGraw-Edison Streetworks Fail-Safe Atlite

MWS DLS RSA Ametrix

Invue

Domestic Facilities

Cranbury, New Jersey Elk Grove Village, Illinois Irving, Texas Ontario, California Peachtree City, Georgia

Canadian Facility

Calgary, Alberta T2E 7V9

Cooper Lighting and AtLite are valuable trademarks of Cooper Industries in the United States and other countries. You are not permitted to use the Cooper Trademarks without the prior written consent of Cooper Industries.

Cooper Industries, Ltd. 600 Travis, Ste. 5800 Houston, TX 77002-1001 P: 713-209-8400 www.cooperindustries.com

