


http://barbican.ca/product/elbow-2/ product code #18-H120V

this spec sheet was generated on Feb 7th 2020

PROJECT INFORMATION

PROJECT	
ТҮРЕ	QUANTITY
NOTES	

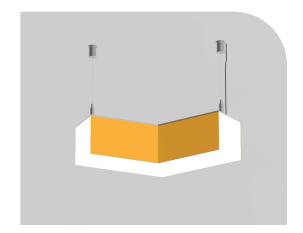


Release your creativity with Metro! This modular system allows you to expand your design into new terrain with a plethora of colour and shapes to choose from. Made with our specialized laminated shade material, each Metro product is durable and less prone to damage during installation and day-to-day interactions than traditional fabric shades. The letter V has many meanings, but to millennials, if you stick a colon before the V, you create a duck. Hung alone as a focal point pendant, or used in conjunction with other Metro fixtures, the Elbow (formerly the "V-Shape 120°") fits the bill.


Please note that the overall dimensions are based on

the centre line (see example in the images section).

Contact Barbican for any questions you may have regarding dimensions. All configurations come standard with a 1? purpose gap (see drawing at left). A butt joint is available upon request for most configurations, please contact Barbican for more information.

"End Lens" option (#5 below) refers to the exposed end diffuser(s), where a modular section begins and/or terminates. Choices for this diffuser are to either match the front material (MFM) or to match the bottom diffuser material (MBL). The default for all interior diffusers is to match the bottom diffuser in order to keep the section from darkening with a fabric or other material. Please see drawing attached for reference.



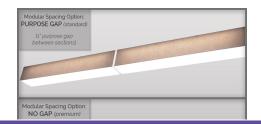







http://barbican.ca/product/elbow-2/ product code #18-H120V

this spec sheet was generated on Feb 7th 2020

Build Your Product Code

#18-H ²	120V								
Code			Component Size				Size		
This is the primary p the Elbo		1	18L 1	20° - 12" length 20° - 18" length 20° - 24" length			3W 4W 6W 8W 10W	3H, 4H, 6H, 8H, 3H, 4H, 6H, 8H, 3H, 4H, 6H, 8H,	10H, 12H 10H, 12H 10H, 12H
Materia Pick from our large co 1000 mate	llection of over	ACB ACW	Mounting t Cable BLACK Power Cord t Cable WHITE Power Cord	able BLACK Power Cord SCL able WHITE Power Cord FCL			Driver Location Surface Ceiling Location Flush Ceiling Location Above Ceiling Location		
Finish (Car	nopies, Stems)			Source	•				Voltage
WHT White BLK Black BA Brushed Alum RAL RAL (North Ar			380LM/LF(4W/LF) 38		380	190LM/LF (2W/LF) 380LM/LF (4W/LF) 760LM/LF (8W/LF)		120V 277V	
Temperature	Colour Render	ring Index		Dim	nmin	ng Drivers		As	sembly Type
3000K 3000 °K 2700K 2700 °K 3500K 3500 °K 4000K 4000 °K	90CRI	90 CRI		Dimming Driver		Conditional \\ 120 Volts, 27		PG Pui	gle Pendant pose Gap Gap (Premium)



http://barbican.ca/product/elbow-2/ product code #18-H120V

this spec sheet was generated on Feb 7th 2020

Feature Descriptors

Assembly Type Driver Location Temperature Please note default is a singular product. Hung Surface Ceiling Location is most visible. Flush Colour temperature is a description of the warmth independently (not in an array). Ceiling Location places electronics flush with the or coolness of a light source. It is a characteristic of visible light and is stated in units of absolute ceiling with a visible cover mounted flush to the If you require an array, you will need to select the ceiling. Remote LED Driver Box (Above Ceiling temperature, known as Kelvin (K). gap type. Arrays require a drawing or sketch, Location) places electronics above the acoustic please submit to sales@barbican.ca for clarity. ceiling with a small cover mounted flush to the ceiling. Singular Pendant

Colour Rendering Index	Dimming Drivers	Mounting	Source
A colour rendering index (CRI) is a quantitative measure of the ability of a light source to reveal the colours of various objects faithfully in comparison with an ideal or natural light source.	Sensor Ready and Integrated controls, as well as proprietary drivers can be added to Barbican fixtures. Please consult Barbican for availability of these options for this fixture.	Choose between Stainless Steel Aircraft Cable with either a Black or White Power Cord, or Stem Mount. Standard Aircraft Cable is 144". Standard Stem length is 48".	Please note if lumens are shown, they are delivered and approximate. Other lumen packages are available. Driver loss is included in the Nominal LED Wattage.
Finish (Canopies, Stems)	Size	Voltage	Material
Finish applies to the canopy and, if applicable, the stem. RAL colours are a premium option, additional	Please note that side illumination is optimized at a width to height ration of 2X or less.	120 and 277 are standard options	Open the material palette.

Elbow #18-H120V barbican specification sheet



http://barbican.ca/product/elbow-2/ product code #18-H120V

this spec sheet was generated on Feb 7th 2020































































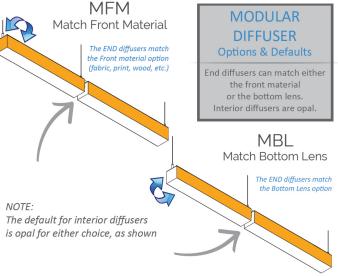

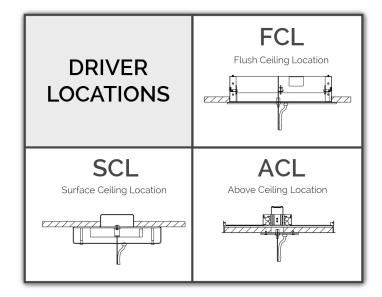

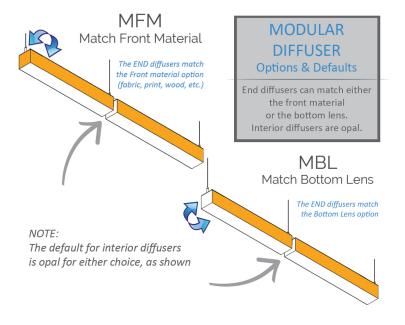

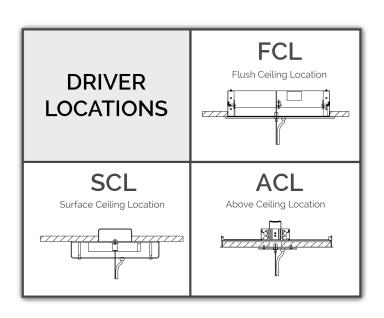



SP Singular Pendant Mounting

SP Singular Pendant Mounting