


PROJECT INFORMATION


PROJECT

TYPE


QUANTITY

NOTES

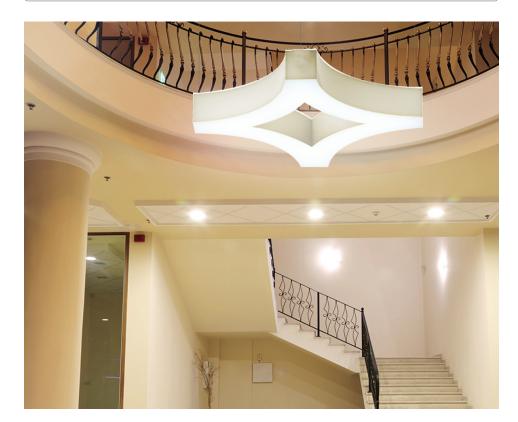



this spec sheet was generated on Feb 7th 2020



Release your creativity with Metro! This modular system allows you to expand your design into new terrain with a plethora of colour and shapes to choose from. Made with our specialized laminated shade material, each Metro product is durable and less prone to damage during installation and day-to-day interactions than traditional fabric shades. The Paragon (formerly the "Diamond 90°") brings purity to your design. Based on a diamond's natural beauty, it will define the ambiance of its environment. Hung alone as a focal point pendant, or used in conjunction with other Metro fixtures, the Paragon helps shape the environment of your space.

Please note that the overall dimensions are based on the centre line (see example in the images section). Contact Barbican for any questions you may have regarding dimensions. All configurations come standard with a 1? purpose gap (see drawing at left). A butt joint is available upon request for most configurations, please contact Barbican for more information. "End Lens" option (#5 below) refers to the exposed end diffuser(s), where a modular section begins and/or terminates. Choices for this diffuser are to either match the front material (MFM) or to match the bottom diffuser material (MBL). The default for all interior diffusers is to match the bottom diffuser in order to keep the section from darkening with a fabric or other material. Please see drawing attached for reference.











http://barbican.ca/product/paragon-2/ product code #18-C90X

this spec sheet was generated on Feb 7th 2020

Build Your Product Code

#18-C90	X								
Code			Component Size				Size		
This is the primary produ the Paragon.	ct code for	2424L 4848L		° Radius - 24 length x 24 len ° Radius - 48 length x 48 len	-		3W 4W 6W 8W	3H, 4H, 6H, 8 3H, 4H, 6H, 8 3H, 4H, 6H, 8 3H, 4H, 6H, 8	BH, 10H, 12H BH, 10H, 12H
Material			Mounting				Driver Location		
Pick from our large collection of over 1000 materials			ACB Aircraft Cable BLACK Power Cord SCL ACW Aircraft Cable WHITE Power Cord FCL ACL ACL			Flush	Surface Ceiling Location Flush Ceiling Location Above Ceiling Location		
Finish (Cons	ppies, Stems)			Source					Voltage
· · · · · · · · · · · · · · · · · · ·	pies, stems)				4001 14/1 5 (0)4	/# - \			
WHT White BLK Black BA Brushed Aluminum RAL RAL (North American)			190LM/LF(2W/LF) 190LM/LF (2W/LF) 380LM/LF(4W/LF) 380LM/LF (4W/LF) 760LM/LF(8W/LF) 760LM/LF (8W/LF)			120V 120 Volts 277V 277 Volts			
Temperature	Colour Rend	ering Index		Dim	ming Drivers			Ass	embly Type
	90CRI	90 CRI		Dimming Drivers	s Conditional	Voltage 277 Volts		SP Sing	le Pendant



http://barbican.ca/product/paragon-2/ product code #18-C90X

this spec sheet was generated on Feb 7th 2020

Feature Descriptors

Assembly Type Driver Location Temperature Please note default is a singular product. Hung Surface Ceiling Location is most visible. Flush Colour temperature is a description of the warmth independently (not in an array). Ceiling Location places electronics flush with the or coolness of a light source. It is a characteristic of visible light and is stated in units of absolute ceiling with a visible cover mounted flush to the If you require an array, you will need to select the ceiling. Remote LED Driver Box (Above Ceiling temperature, known as Kelvin (K). gap type. Arrays require a drawing or sketch, Location) places electronics above the acoustic please submit to sales@barbican.ca for clarity. ceiling with a small cover mounted flush to the ceiling. Singular Pendant

Colour Rendering Index	Dimming Drivers	Mounting	Source		
A colour rendering index (CRI) is a quantitative measure of the ability of a light source to reveal the colours of various objects faithfully in comparison with an ideal or natural light source. Sensor Ready and Integrated controls, as well as proprietary drivers can be added to Barbican fixtures. Please consult Barbican for availability of these options for this fixture.		Choose between Stainless Steel Aircraft Cable with either a Black or White Power Cord, or Stem Mount. Standard Aircraft Cable is 144". Standard Stem length is 48".	Please note if lumens are shown, they are delivered and approximate. Other lumen packages are available. Driver loss is included in the Nominal LED Wattage.		
Finish (Canopies, Stems)	Size	Voltage	Material		
Finish applies to the canopy and, if applicable, the stem. RAL colours are a premium option, additional charges apply and may increase lead time.	Please note that side illumination is optimized at a width to height ration of 2X or less.	120 and 277 are standard options	Open the material palette.		





http://barbican.ca/product/paragon-2/ product code #18-C90X

this spec sheet was generated on Feb 7th 2020































































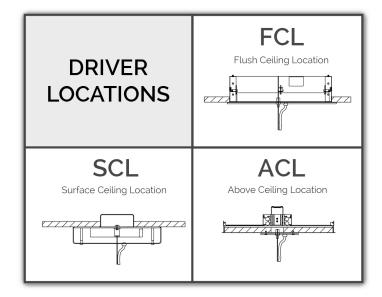

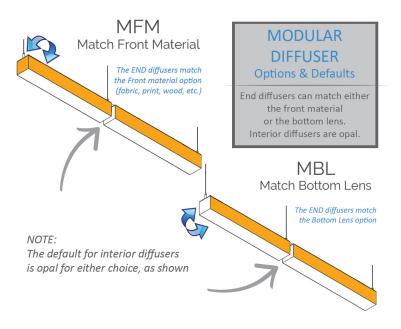

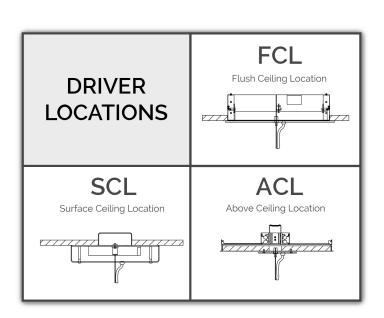



SP Singular Pendant Mounting

SP Singular Pendant Mounting