

Day-Brite

CFI

by Signify

Surface

DuaLED 2x4

4300, 4900, 5800, or
7300 lumens



Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

The Day-Brite / CFI DuaLED surface LED is a highly efficient, visually comfortable, architecturally styled surface LED luminaire designed with a minimalistic strategy to achieve sustainable objectives. Its clean modern design offers a fresh variation on the popular dual chamber theme and provides architectural styling compatible with virtually any area

Ordering guide

Example: **2SDL43L840-4-D-UNV-DIM**

Width	Family	Lumen Package	Color	Length	Center Diffuser	Voltage	Driver	Options
2	SDL		—	4	D	—	—	
2 2'	SDL Surface DuaLED	43L 4300 nominal delivered lumens 49L 4900 nominal delivered lumens 58L 5800 nominal delivered lumens 73L 7300 nominal delivered lumens	830 80 CRI, 3000K 835 80 CRI, 3500K 840 80 CRI, 4000K 850 80 CRI, 5000K	4 4'	D Diffuse (opal)	UNV Universal Voltage, 120-277 volt 347 347V	DIM ¹ 0-10V dimming SDIM ² Step dimming to 40% input power DALI DALI dimming	AG Antimicrobial paint CC Custom color GLR Fusing, fast blow SWZG2 ^{2,3,4} Integral sensor, daylighting and occupancy, advanced grouping with dwell time and zoning SWZDT ³ Integral sensor, daylighting and occupancy, advanced grouping with dwell time DAYOCC ³ Integral sensor, daylighting and occupancy, basic grouping DSC Quick driver disconnect

Footnotes

- 1 Integral SWZDT and DAYOCC options dimmable to 5% via wireless wall switch, all other 0-10V wired configurations dimmable to 1%.
- 2 58L and 73L not available with SDIM and SWZG2 options.
- 3 Specify only with -DIM driver option.
- 4 Must order SWZ-REMOTE SpaceWise handheld remote with each system order.

Energy Data

Luminaire	Catalog Number	Input Power	Efficacy
2x4	2SDL43L840	34.1	130
	2SDL49L840	37.7	130
	2SDL58L840	46.3	129
	2SDL73L840	57.3	127

SpaceWise (SWZG2) Accessories (order separately)

- **SWZ-REMOTE** – SpaceWise handheld remote for grouping and configuration (at least one remote required for any SpaceWise installation)
- **LRM1743** – External sensor to increase occupancy coverage area of SpaceWise luminaire groups
- **UID8451/10** – Wireless Dimmer Switch Selector
- **UID8461/10** – Wireless Scene Selector



2SDL DuaLED surface LED 2x4

4300, 4900, 5800, or 7300 lumens

Application

- A highly efficient, visually comfortable, architecturally styled recessed LED luminaire designed with a minimalistic strategy to achieve sustainable objectives.
- Low profile configuration is only 3" high with sloped sides for a sleek appearance.
- Clean, modern design offers a fresh variation on the popular dual chamber theme and provides architectural styling compatible with virtually any area.
- Soft opal diffusers with large luminous area minimize apparent brightness and provide high visual comfort perfect for a wide variety of general lighting applications like offices, schools, retail, or healthcare.
- Multiple lumen packages over a wide range to provide significant application flexibility over light levels and/or luminaire spacing.
- A high lumen package can be used in conjunction with wide luminaire spacing to reduce luminaire quantities and overall cost while maintaining good uniformity.
- Directs a controlled amount of light to the higher angles in the room to balance the brightness of the surfaces and eliminate "cave effect" while creating the impression of a larger, brighter space without glare.
- Excellent color rendering with a CRI of 80.
- LEDs are an excellent source for use with controls since dimming or frequent switching does not degrade the performance or life of the source. Integral or external sensors are available for use.
- Surface mount design requires no plenum space.
- DuaLED luminaires are DesignLights Consortium® qualified. Please see the DLC QPL list for exact catalog numbers. (www.designlights.org/QPL)

Construction/Finish

- Uncomplicated design is well under 3" in depth and only requires a few parts outside of the electrical system and hardware, creating several benefits:
 - Less material required
 - Less packaging required
 - Reduced weight
 - Less energy required for construction and assembly
 - More luminaires can be shipped per truck to reduce fuel use and emissions
- Luminaire is painted after fabrication with a matte white polyester powder coating for a high quality, durable finish with no unfinished edges to create an installation hazard or potential for corrosion.

Electrical

- Total luminaire efficacy as high as 130 LPW (lumens per Watt) significantly reduces energy use compared to conventional 2x4 sources.
- Driver and LED boards are easily accessible from below without tools. Multiple LED boards are individually replaceable if needed via plug-in connectors to ensure long service life.
- 0-10V dimming is standard.
- Five year limited luminaire warranty includes LED boards and driver. Visit www.philips.com/warranties for complete warranty information.
- High efficiency LEDs have a minimum 70,000 hour rated life (L70). Predicted L70 lifetime based on LED manufacturer's LM-80 data and in-situ laboratory testing.
- cETLus listed to UL and CSA standards, suitable for damp locations.

Enclosure

- Diffuser has large surface area for brightness control.
- Opal diffuser provides soft, comfortable lighting while maintaining high efficiency.
- Diffuser requires no frames or fasteners and can be easily removed from below without tools if needed.

General Notes

- All options factory installed.
- All accessories are field installed.
- This luminaire is not suitable for continuous row mounting.
- Many luminaire components, such as reflectors, refractors, lenses, sockets, lampholders, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, petroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility.

SpaceWise (SWZG2)

- Commissioning via SWZ-REMOTE handheld remote, must order a minimum of one per installation
- Integral sensing options (DAYOCC, SWZG2, SWZDT) may not be combined
- For more information on the sensor, please refer to www.lightingproducts.philips.com/documents/webdb2/DayBrite/pdf/SWZG2_sensor.pdf
- Visit www.philips.com/spacewise for more information about SpaceWise Technology (SWZG2)



DAYOCC & SpaceWise DT (SWZDT)

- Commissioning via compatible Android phone and Philips Field App
- Dimming via compatible wireless wall switch only (see below)
- Register for the commissioning app at <http://registration.componentcloud.philips.com/appregistration/>
- Integral sensing options (DAYOCC, SWZG2, SWZDT) may not be combined
- For more information including recommended switches, refer to the following –
 - DAYOCC** – www.lightingproducts.philips.com/documents/webdb2/DayBrite/pdf/DAYOCC_sensor.pdf
 - SWZDT** – www.lightingproducts.philips.com/documents/webdb2/DayBrite/pdf/SWZDT_sensor.pdf

2SDL DuaLED surface LED 2x4

4300, 4900, 5800, or 7300 lumens

Dimensions

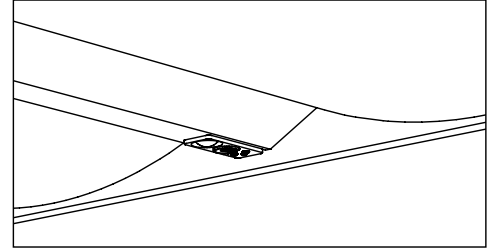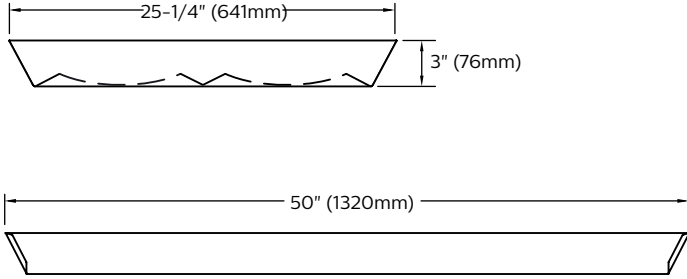

SpaceWise (SWZ) automated wireless technology is available for integrated occupancy and daylight harvesting. Individual options for dimming, occupancy detection, and daylight harvesting are also available if SpaceWise option is not selected.

Photometry

2x4 DuaLED, 4300 nominal delivered lumens

LER – 130

Catalog No.	2SDL43L840-4-D
Test No.	36164
S/MH	1.3
Lamp Type	LED
Lumens/Lamp	4445
Input Watts	34.1

Comparative yearly lighting energy cost per 1000 lumens – **\$1.85** based on 3000 hrs. and 5.08 pwr KWH.

The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

Photometric values based on test performed in compliance with LM-79.

Candela distribution

Vertical Angle	Horizontal Angle			
	0°	45°	90°	-45°
0	1530	1530	1530	1530
5	1524	1524	1528	1524
15	1471	1476	1481	1476
25	1365	1372	1379	1372
35	1210	1220	1232	1220
45	1016	1032	1044	1032
55	790	811	820	811
65	548	568	566	568
75	307	310	302	310
85	91	75	71	75

Light Distribution

Degrees	Lumens	% Luminaire
0-30	1193	26.8
0-40	1956	44.0
0-60	3472	78.1
0-90	4445	100.0

Average Luminance

Angle	End	45°	Cross
45	2679	2721	2752
55	2569	2636	2666
65	2418	2508	2497
75	2213	2235	2176
85	1945	1609	1523

Coefficients of Utilization

EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

Ceiling (pcc)	80%			70%			50%		
	70	50	30	70	50	30	50	30	
Wall (pw)	Zonal cavity method - Effective floor reflectance = 20%								
RCR	Zonal cavity method - Effective floor reflectance = 20%								
Room Cavity Ratio	0	118	118	118	115	115	115	111	111
	1	109	104	98	106	101	96	96	93
	2	98	90	82	95	88	81	84	79
	3	90	79	70	86	77	69	73	68
	4	81	69	60	80	68	59	66	58
	5	75	61	53	72	60	53	58	52
	6	69	56	46	68	55	46	53	46
	7	65	51	41	63	50	41	47	40
	8	59	46	38	57	46	36	44	36
	9	56	42	34	55	41	34	40	34
	10	53	39	30	51	39	30	38	30

2x4 DuaLED, 4900 nominal delivered lumens

LER – 130

Catalog No.	2SDL49L840-4-D
Test No.	36166
S/MH	1.3
Lamp Type	LED
Lumens/Lamp	4919
Input Watts	37.7

Comparative yearly lighting energy cost per 1000 lumens – **\$1.85** based on 3000 hrs. and 5.08 pwr KWH.

The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

Photometric values based on test performed in compliance with LM-79.

Candela distribution

Vertical Angle	Horizontal Angle			
	0°	45°	90°	-45°
0	1692	1692	1692	1692
5	1686	1687	1691	1687
15	1628	1633	1639	1633
25	1512	1517	1526	1517
35	1338	1351	1362	1351
45	1123	1141	1155	1141
55	873	896	908	896
65	604	629	626	629
75	339	343	334	343
85	101	84	79	84

Light Distribution

Degrees	Lumens	% Luminaire
0-30	1320	26.8
0-40	2165	44.0
0-60	3842	78.1
0-90	4919	100.0

Average Luminance

Angle	End	45°	Cross
45	2962	3010	3045
55	2838	2913	2953
65	2666	2777	2763
75	2444	2474	2403
85	2155	1804	1692

Coefficients of Utilization

EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)

Ceiling (pcc)	80%			70%			50%		
	70	50	30	70	50	30	50	30	
Wall (pw)	Zonal cavity method - Effective floor reflectance = 20%								
RCR	Zonal cavity method - Effective floor reflectance = 20%								
Room Cavity Ratio	0	118	118	118	115	115	115	111	111
	1	109	104	98	106	101	96	96	93
	2	98	90	82	95	88	81	84	79
	3	90	79	70	86	77	69	73	68
	4	81	69	60	80	68	59	66	58
	5	75	61	53	72	60	53	58	52
	6	69	56	46	68	55	46	53	46
	7	65	51	41	63	50	41	47	40
	8	59	46	38	57	46	36	44	36
	9	56	42	34	55	41	34	40	34
	10	53	39	30	51	39	30	38	30

2SDL DuaLED surface LED 2x4

4300, 4900, 5800, or 7300 lumens

2x4 DuaLED, 5800 nominal delivered lumens

LER – 129

Catalog No. 2SDL58L840-4-D Test No. 36167 S/MH 1.3 Lamp Type LED Lumens/Lamp 6007 Input Watts 46.3 Comparative yearly lighting energy cost per 1000 lumens – \$1.85 based on 3000 hrs. and \$.08 pwr KWH. The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology. Photometric values based on test performed in compliance with LM-79.	Candela distribution <table border="1"> <thead> <tr> <th rowspan="2">Vertical Angle</th> <th colspan="4">Horizontal Angle</th> </tr> <tr> <th>0°</th> <th>45°</th> <th>90°</th> <th>-45°</th> </tr> </thead> <tbody> <tr><td>0</td><td>2067</td><td>2067</td><td>2067</td><td>2067</td></tr> <tr><td>5</td><td>2059</td><td>2060</td><td>2066</td><td>2060</td></tr> <tr><td>15</td><td>1989</td><td>1994</td><td>2001</td><td>1994</td></tr> <tr><td>25</td><td>1845</td><td>1853</td><td>1864</td><td>1853</td></tr> <tr><td>35</td><td>1636</td><td>1648</td><td>1666</td><td>1648</td></tr> <tr><td>45</td><td>1372</td><td>1393</td><td>1411</td><td>1393</td></tr> <tr><td>55</td><td>1068</td><td>1096</td><td>1109</td><td>1096</td></tr> <tr><td>65</td><td>741</td><td>769</td><td>765</td><td>769</td></tr> <tr><td>75</td><td>416</td><td>419</td><td>407</td><td>419</td></tr> <tr><td>85</td><td>123</td><td>102</td><td>95</td><td>102</td></tr> </tbody> </table>	Vertical Angle	Horizontal Angle				0°	45°	90°	-45°	0	2067	2067	2067	2067	5	2059	2060	2066	2060	15	1989	1994	2001	1994	25	1845	1853	1864	1853	35	1636	1648	1666	1648	45	1372	1393	1411	1393	55	1068	1096	1109	1096	65	741	769	765	769	75	416	419	407	419	85	123	102	95	102	Light Distribution <table border="1"> <thead> <tr> <th>Degrees</th> <th>Lumens</th> <th>% Luminaire</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>1612</td><td>26.8</td></tr> <tr><td>0-40</td><td>2644</td><td>44.0</td></tr> <tr><td>0-60</td><td>4692</td><td>78.1</td></tr> <tr><td>0-90</td><td>6007</td><td>100.0</td></tr> </tbody> </table>	Degrees	Lumens	% Luminaire	0-30	1612	26.8	0-40	2644	44.0	0-60	4692	78.1	0-90	6007	100.0	Average Luminance <table border="1"> <thead> <tr> <th>Angle</th> <th>End</th> <th>45°</th> <th>Cross</th> </tr> </thead> <tbody> <tr><td>45</td><td>3618</td><td>3675</td><td>3721</td></tr> <tr><td>55</td><td>3471</td><td>3562</td><td>3604</td></tr> <tr><td>65</td><td>3269</td><td>3392</td><td>3376</td></tr> <tr><td>75</td><td>2994</td><td>3021</td><td>2934</td></tr> <tr><td>85</td><td>2640</td><td>2187</td><td>2039</td></tr> </tbody> </table>	Angle	End	45°	Cross	45	3618	3675	3721	55	3471	3562	3604	65	3269	3392	3376	75	2994	3021	2934	85	2640	2187	2039																																																		
			Vertical Angle	Horizontal Angle																																																																																																																																																			
0°	45°	90°		-45°																																																																																																																																																			
0	2067	2067	2067	2067																																																																																																																																																			
5	2059	2060	2066	2060																																																																																																																																																			
15	1989	1994	2001	1994																																																																																																																																																			
25	1845	1853	1864	1853																																																																																																																																																			
35	1636	1648	1666	1648																																																																																																																																																			
45	1372	1393	1411	1393																																																																																																																																																			
55	1068	1096	1109	1096																																																																																																																																																			
65	741	769	765	769																																																																																																																																																			
75	416	419	407	419																																																																																																																																																			
85	123	102	95	102																																																																																																																																																			
Degrees	Lumens	% Luminaire																																																																																																																																																					
0-30	1612	26.8																																																																																																																																																					
0-40	2644	44.0																																																																																																																																																					
0-60	4692	78.1																																																																																																																																																					
0-90	6007	100.0																																																																																																																																																					
Angle	End	45°	Cross																																																																																																																																																				
45	3618	3675	3721																																																																																																																																																				
55	3471	3562	3604																																																																																																																																																				
65	3269	3392	3376																																																																																																																																																				
75	2994	3021	2934																																																																																																																																																				
85	2640	2187	2039																																																																																																																																																				
Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20) <table border="1"> <thead> <tr> <th rowspan="2">Ceiling (pcc)</th> <th colspan="3">80%</th> <th colspan="3">70%</th> <th colspan="3">50%</th> </tr> <tr> <th>70</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> <th>50</th> <th>30</th> </tr> </thead> <tbody> <tr> <td>Wall (pw)</td> <td colspan="9">Zonal cavity method - Effective floor reflectance = 20%</td> </tr> <tr> <td>RCR</td> <td colspan="9">Zonal cavity method - Effective floor reflectance = 20%</td> </tr> <tr> <td>Room Cavity Ratio</td> <td>0</td><td>118</td><td>118</td><td>118</td><td>115</td><td>115</td><td>115</td><td>111</td><td>111</td> </tr> <tr> <td></td> <td>1</td><td>109</td><td>104</td><td>98</td><td>106</td><td>101</td><td>96</td><td>96</td><td>93</td> </tr> <tr> <td></td> <td>2</td><td>98</td><td>90</td><td>82</td><td>95</td><td>88</td><td>81</td><td>84</td><td>79</td> </tr> <tr> <td></td> <td>3</td><td>90</td><td>79</td><td>70</td><td>86</td><td>77</td><td>69</td><td>73</td><td>68</td> </tr> <tr> <td></td> <td>4</td><td>81</td><td>69</td><td>60</td><td>80</td><td>68</td><td>59</td><td>66</td><td>58</td> </tr> <tr> <td></td> <td>5</td><td>75</td><td>61</td><td>53</td><td>72</td><td>60</td><td>53</td><td>58</td><td>52</td> </tr> <tr> <td></td> <td>6</td><td>69</td><td>56</td><td>46</td><td>68</td><td>55</td><td>46</td><td>53</td><td>46</td> </tr> <tr> <td></td> <td>7</td><td>65</td><td>51</td><td>41</td><td>63</td><td>50</td><td>41</td><td>47</td><td>40</td> </tr> <tr> <td></td> <td>8</td><td>59</td><td>46</td><td>38</td><td>57</td><td>46</td><td>36</td><td>44</td><td>36</td> </tr> <tr> <td></td> <td>9</td><td>56</td><td>42</td><td>34</td><td>55</td><td>41</td><td>34</td><td>40</td><td>34</td> </tr> <tr> <td></td> <td>10</td><td>53</td><td>39</td><td>30</td><td>51</td><td>39</td><td>30</td><td>38</td><td>30</td> </tr> </tbody> </table>				Ceiling (pcc)	80%			70%			50%			70	50	30	70	50	30	50	30	Wall (pw)	Zonal cavity method - Effective floor reflectance = 20%									RCR	Zonal cavity method - Effective floor reflectance = 20%									Room Cavity Ratio	0	118	118	118	115	115	115	111	111		1	109	104	98	106	101	96	96	93		2	98	90	82	95	88	81	84	79		3	90	79	70	86	77	69	73	68		4	81	69	60	80	68	59	66	58		5	75	61	53	72	60	53	58	52		6	69	56	46	68	55	46	53	46		7	65	51	41	63	50	41	47	40		8	59	46	38	57	46	36	44	36		9	56	42	34	55	41	34	40	34		10	53	39	30	51	39	30	38	30
Ceiling (pcc)	80%				70%			50%																																																																																																																																															
	70	50	30	70	50	30	50	30																																																																																																																																															
Wall (pw)	Zonal cavity method - Effective floor reflectance = 20%																																																																																																																																																						
RCR	Zonal cavity method - Effective floor reflectance = 20%																																																																																																																																																						
Room Cavity Ratio	0	118	118	118	115	115	115	111	111																																																																																																																																														
	1	109	104	98	106	101	96	96	93																																																																																																																																														
	2	98	90	82	95	88	81	84	79																																																																																																																																														
	3	90	79	70	86	77	69	73	68																																																																																																																																														
	4	81	69	60	80	68	59	66	58																																																																																																																																														
	5	75	61	53	72	60	53	58	52																																																																																																																																														
	6	69	56	46	68	55	46	53	46																																																																																																																																														
	7	65	51	41	63	50	41	47	40																																																																																																																																														
	8	59	46	38	57	46	36	44	36																																																																																																																																														
	9	56	42	34	55	41	34	40	34																																																																																																																																														
	10	53	39	30	51	39	30	38	30																																																																																																																																														

2x4 DuaLED, 7300 nominal delivered lumens

LER – 127

Catalog No. 2SDL73L840-4-D Test No. 36170 S/MH 1.3 Lamp Type WLED Lumens/Lamp 7307 Input Watts 57.3 Comparative yearly lighting energy cost per 1000 lumens – \$1.88 based on 3000 hrs. and \$.08 pwr KWH. The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology. Photometric values based on test performed in compliance with LM-79.	Candela distribution <table border="1"> <thead> <tr> <th rowspan="2">Vertical Angle</th> <th colspan="4">Horizontal Angle</th> </tr> <tr> <th>0°</th> <th>45°</th> <th>90°</th> <th>-45°</th> </tr> </thead> <tbody> <tr><td>0</td><td>2514</td><td>2514</td><td>2514</td><td>2514</td></tr> <tr><td>5</td><td>2504</td><td>2506</td><td>2513</td><td>2506</td></tr> <tr><td>15</td><td>2419</td><td>2427</td><td>2434</td><td>2427</td></tr> <tr><td>25</td><td>2246</td><td>2256</td><td>2266</td><td>2256</td></tr> <tr><td>35</td><td>1989</td><td>2006</td><td>2026</td><td>2006</td></tr> <tr><td>45</td><td>1669</td><td>1695</td><td>1716</td><td>1695</td></tr> <tr><td>55</td><td>1299</td><td>1331</td><td>1348</td><td>1331</td></tr> <tr><td>65</td><td>900</td><td>933</td><td>931</td><td>933</td></tr> <tr><td>75</td><td>505</td><td>510</td><td>496</td><td>510</td></tr> <tr><td>85</td><td>150</td><td>124</td><td>117</td><td>124</td></tr> </tbody> </table>	Vertical Angle	Horizontal Angle				0°	45°	90°	-45°	0	2514	2514	2514	2514	5	2504	2506	2513	2506	15	2419	2427	2434	2427	25	2246	2256	2266	2256	35	1989	2006	2026	2006	45	1669	1695	1716	1695	55	1299	1331	1348	1331	65	900	933	931	933	75	505	510	496	510	85	150	124	117	124	Light Distribution <table border="1"> <thead> <tr> <th>Degrees</th> <th>Lumens</th> <th>% Luminaire</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>1961</td><td>26.8</td></tr> <tr><td>0-40</td><td>3216</td><td>44.0</td></tr> <tr><td>0-60</td><td>5707</td><td>78.1</td></tr> <tr><td>0-90</td><td>7308</td><td>100.0</td></tr> </tbody> </table>	Degrees	Lumens	% Luminaire	0-30	1961	26.8	0-40	3216	44.0	0-60	5707	78.1	0-90	7308	100.0	Average Luminance <table border="1"> <thead> <tr> <th>Angle</th> <th>End</th> <th>45°</th> <th>Cross</th> </tr> </thead> <tbody> <tr><td>45</td><td>4402</td><td>4470</td><td>4525</td></tr> <tr><td>55</td><td>4222</td><td>4329</td><td>4384</td></tr> <tr><td>65</td><td>3973</td><td>4117</td><td>4108</td></tr> <tr><td>75</td><td>3641</td><td>3671</td><td>3570</td></tr> <tr><td>85</td><td>3216</td><td>2655</td><td>2495</td></tr> </tbody> </table>	Angle	End	45°	Cross	45	4402	4470	4525	55	4222	4329	4384	65	3973	4117	4108	75	3641	3671	3570	85	3216	2655	2495																																																		
			Vertical Angle	Horizontal Angle																																																																																																																																																			
0°	45°	90°		-45°																																																																																																																																																			
0	2514	2514	2514	2514																																																																																																																																																			
5	2504	2506	2513	2506																																																																																																																																																			
15	2419	2427	2434	2427																																																																																																																																																			
25	2246	2256	2266	2256																																																																																																																																																			
35	1989	2006	2026	2006																																																																																																																																																			
45	1669	1695	1716	1695																																																																																																																																																			
55	1299	1331	1348	1331																																																																																																																																																			
65	900	933	931	933																																																																																																																																																			
75	505	510	496	510																																																																																																																																																			
85	150	124	117	124																																																																																																																																																			
Degrees	Lumens	% Luminaire																																																																																																																																																					
0-30	1961	26.8																																																																																																																																																					
0-40	3216	44.0																																																																																																																																																					
0-60	5707	78.1																																																																																																																																																					
0-90	7308	100.0																																																																																																																																																					
Angle	End	45°	Cross																																																																																																																																																				
45	4402	4470	4525																																																																																																																																																				
55	4222	4329	4384																																																																																																																																																				
65	3973	4117	4108																																																																																																																																																				
75	3641	3671	3570																																																																																																																																																				
85	3216	2655	2495																																																																																																																																																				
Coefficients of Utilization EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20) <table border="1"> <thead> <tr> <th rowspan="2">Ceiling (pcc)</th> <th colspan="3">80%</th> <th colspan="3">70%</th> <th colspan="3">50%</th> </tr> <tr> <th>70</th> <th>50</th> <th>30</th> <th>70</th> <th>50</th> <th>30</th> <th>50</th> <th>30</th> </tr> </thead> <tbody> <tr> <td>Wall (pw)</td> <td colspan="9">Zonal cavity method - Effective floor reflectance = 20%</td> </tr> <tr> <td>RCR</td> <td colspan="9">Zonal cavity method - Effective floor reflectance = 20%</td> </tr> <tr> <td>Room Cavity Ratio</td> <td>0</td><td>118</td><td>118</td><td>118</td><td>115</td><td>115</td><td>115</td><td>111</td><td>111</td> </tr> <tr> <td></td> <td>1</td><td>109</td><td>104</td><td>98</td><td>106</td><td>101</td><td>96</td><td>96</td><td>93</td> </tr> <tr> <td></td> <td>2</td><td>98</td><td>90</td><td>82</td><td>95</td><td>88</td><td>81</td><td>84</td><td>79</td> </tr> <tr> <td></td> <td>3</td><td>90</td><td>79</td><td>70</td><td>86</td><td>77</td><td>69</td><td>73</td><td>68</td> </tr> <tr> <td></td> <td>4</td><td>81</td><td>69</td><td>60</td><td>80</td><td>68</td><td>59</td><td>66</td><td>58</td> </tr> <tr> <td></td> <td>5</td><td>75</td><td>61</td><td>53</td><td>72</td><td>60</td><td>53</td><td>58</td><td>52</td> </tr> <tr> <td></td> <td>6</td><td>69</td><td>56</td><td>46</td><td>68</td><td>55</td><td>46</td><td>53</td><td>46</td> </tr> <tr> <td></td> <td>7</td><td>65</td><td>51</td><td>41</td><td>63</td><td>50</td><td>41</td><td>47</td><td>40</td> </tr> <tr> <td></td> <td>8</td><td>59</td><td>46</td><td>38</td><td>57</td><td>46</td><td>36</td><td>44</td><td>36</td> </tr> <tr> <td></td> <td>9</td><td>56</td><td>42</td><td>34</td><td>55</td><td>41</td><td>34</td><td>40</td><td>34</td> </tr> <tr> <td></td> <td>10</td><td>53</td><td>39</td><td>30</td><td>51</td><td>39</td><td>30</td><td>38</td><td>30</td> </tr> </tbody> </table>				Ceiling (pcc)	80%			70%			50%			70	50	30	70	50	30	50	30	Wall (pw)	Zonal cavity method - Effective floor reflectance = 20%									RCR	Zonal cavity method - Effective floor reflectance = 20%									Room Cavity Ratio	0	118	118	118	115	115	115	111	111		1	109	104	98	106	101	96	96	93		2	98	90	82	95	88	81	84	79		3	90	79	70	86	77	69	73	68		4	81	69	60	80	68	59	66	58		5	75	61	53	72	60	53	58	52		6	69	56	46	68	55	46	53	46		7	65	51	41	63	50	41	47	40		8	59	46	38	57	46	36	44	36		9	56	42	34	55	41	34	40	34		10	53	39	30	51	39	30	38	30
Ceiling (pcc)	80%				70%			50%																																																																																																																																															
	70	50	30	70	50	30	50	30																																																																																																																																															
Wall (pw)	Zonal cavity method - Effective floor reflectance = 20%																																																																																																																																																						
RCR	Zonal cavity method - Effective floor reflectance = 20%																																																																																																																																																						
Room Cavity Ratio	0	118	118	118	115	115	115	111	111																																																																																																																																														
	1	109	104	98	106	101	96	96	93																																																																																																																																														
	2	98	90	82	95	88	81	84	79																																																																																																																																														
	3	90	79	70	86	77	69	73	68																																																																																																																																														
	4	81	69	60	80	68	59	66	58																																																																																																																																														
	5	75	61	53	72	60	53	58	52																																																																																																																																														
	6	69	56	46	68	55	46	53	46																																																																																																																																														
	7	65	51	41	63	50	41	47	40																																																																																																																																														
	8	59	46	38	57	46	36	44	36																																																																																																																																														
	9	56	42	34	55	41	34	40	34																																																																																																																																														
	10	53	39	30	51	39	30	38	30																																																																																																																																														

