


lm/W PERFORMANCE PAGE 2 & 3



STANDARD FINISHES
Black, White, & Silver



LIGHT LOSS FACTOR		
CCT	CRI	%
4000K	84+	100%
3500K	84+	97%
3000K	84+	95.7%
4000K	92+	88.9%
3500K	92+	85.5%
3000K	92+	83.8%

LUX | ENABLED



Suitable for Damp Locations



ORDER GUIDE

ERA-W											
A	B	C	D	E	F	G	H	I	J	K	

OPTIONS

L, M (Multiple Selections)

EXAMPLE
ERA-W | L | 82 | SS | 8 | 35K | 8 | 1 | UNV | S1 | W

A. MODEL	B. SHIELDING	C. DISTRIBUTION	D. OUTPUT	E. LENGTH	F. COLOR TEMPERATURE
Q ERA-W	Q L Satin Lens	Q 73 70% Indirect, 30% Direct	Q SS Super SAVER Q HO High Output	Q 4 4 ft (48 in) Q 8 8 ft (96 in) Q XXX System Run	Q 30K 3000K Q 35K 3500K Q 40K 4000K WCT White Color Tuning 2700K - 6500K

NOTES

		Consult factory for variations	For delivered lumens, see below.		WCT - max lm/ft is 1000 based on 80 CRI and 4000K. Other CCT's are available consult factory.
--	--	--------------------------------	----------------------------------	--	--

G. CRI	H. CIRCUIT	I. VOLTAGE	J. DRIVER	K. FINISH
Q 8 80+ CRI Q 9 90+ CRI	Q 1 1 - Circuit Q 2A/B 2 - Circuit	Q UNV 120-277v Q 347 347v	Q S1 1% Dimming (0-10v) LDE1 Lutron Hi-Lume 1% Fade to Black ELO 0.1% EldoLED Q DXL 1% Dexal	Q W White Q B Black Q S Silver CC Custom Colors

Consult factory for 90 CRI. 90 CRI option has an R9 value greater than 60.		347 may not be available in all configurations.	AWN-R-W, AWNR-B, VDO, VRF, SPD, & CLM options supplied with DXL driver standard.	Consult factory for custom colors.(power feeds and canopies excluded)
--	--	---	--	---

OPTIONS

L. CONTROLS & FACTORY OPTIONS M. QUICKSHIP


Q NONE Leave Blank	SPD Osram SensiLUM Daylight/Harvest/Occ	Q EB Emergency Battery (10 - Watt)	Q S10 QuickShip 10 - Day (Depletion Policy: Subject to Availability)
Q AWNR-W Lutron Vive (RF/Daylight/Occ) Lutron Vive	CLM Osram Connecting Light Module (CLM) Wattstopper Daylight Sensor (FD-301)	Q EC Emergency Circuit	
Q AWNR-B RF Fixture Control	DAY Wattstopper Daylight Sensor (FD-301)	NL Night Light Circuit	
Q VDO	OCC Wattstopper Occ Sensor (FS-205v2)		
Q VRF	DOC Enlighted Daylight/Harvesting Occ (SU-5E-01)		

AWN-R-W, ANWR-B, VDO, VRF, SPD, & CLM options supplied with DXL driver standard.
EB option only available for lengths 4ft or greater.

Please see note on p.2 for further details regarding QuickShip.

May choose more than one option in this category.

70/30 - 80 CRI- HIGH OUTPUT PERFORMANCE

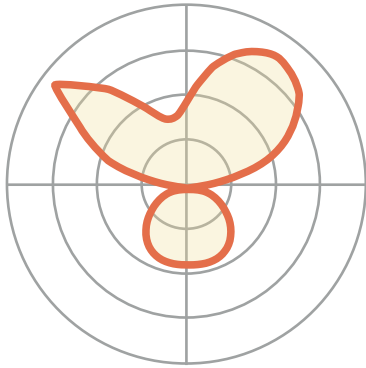

OUTPUT LEVEL	CCT (K)	WATTS PER FOOT	DELIVERED LUMENS	EFFICACY (L/W)
SS	3000	5.75	2691	117
	3500	5.75	2738	119
	4000	5.75	2831	123
HO	3000	8.03	3684	115
	3500	8.03	3748	117
	4000	8.03	3876	121

Performance based on 4-foot luminaire at 4,000K @ 25-degrees C
 Calculated L80 at 80,000 hours
 Lumens per foot are delivered lumens

LIGHT SOURCE

Long life name brand LED chips and boards to ensure the highest of quality while providing even and smooth illumination throughout our luminaires.

Our luminaires are available in 3000K, 3500K and 4000K color temperature as well as White Color Tuning (2700-6500K).

Optional 80CRI or 90CRI available in all CCT options.

LUMEN MAINTENANCE

The projected lumen maintenance of the name brand mid-powered LED's are projected to maintain 80% (L80) of their initial output for +80,000 hours.

CONSTRUCTION

Lux Illuminaire housings are constructed of 20 gauge cold-rolled steel. Our internal joiner system is designed to the highest of standards to ensure our precision cut housings align and fit tightly without light leak. End caps are laser cut for a precise fit.

FINISH

Polyester powder, low gloss textured paint finish applied after a multi-stage pretreatment. Standard luminaire finishes include white, silver, and black. Custom color options are available. (Consult Factory).

OPTICS

Frosted acrylic lens

DRIVERS

All of our luminaires come standard with 1% dimming and THD <20% utilizing 0-10v constant current protocol. 120v/277v is standard with the option of 347v. Driver ambient operating temperature -30°C to +50°C.

EMERGENCY

An integral factory installed 10 watt emergency battery pack. Emergency circuit and Night Light circuit options are available.

LUMINAIRE LENGTH

Our ERA Pendant Direct/Indirect luminaire series are available in 4', and 8' individual lengths or continuous row configurations. Continuous row configurations are joined together on-site utilizing the joiner kits provided.

LUMINAIRE WEIGHT

The approximate weight of a four foot luminaire is 13.95 lbs including end caps assembled.

QUICKSHIP



Indicates QuickShip option 10-day lead times.


Up to 500 linear feet or 100 individual luminaires. Consult Factory for larger projects.

QUICKSHIP

PLEASE NOTE:

- 10-day lead times do not include weekends or holidays.
- A clean order must be received by 12:00 PM EST. All orders received after 12:00 PM EST will be entered the following day.
- Changing orders of any kind will require a new ESD.
- All QuickShip items must be on a separate PO.

CROSS SECTION

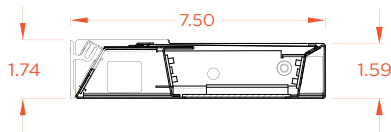

CONTINUOUS RUN ORDER GUIDES

Please use the following run guides for fixture ordering. If your product will require a submittal, our in-house Application Engineering Team will work closely with you on your project.

STEEL PRODUCT ORDER GUIDE	
RUN LENGTH (ft)	RUN CONFIGURATION - SECTION LENGTHS
12	8' + 4'
16	8' + 8'
20	8' + 4' + 8'
24	8' + 8' + 8'
28	8' + 8' + 8' + 4'
32	8' + 8' + 8' + 8'
36	8' + 8' + 4' + 8' + 8'
40	4' + 8' + 8' + 8' + 8' + 4'
44	8' + 8' + 8' + 8' + 8' + 4'
48	8' + 8' + 8' + 8' + 8' + 8'
52	8' + 8' + 8' + 8' + 8' + 8' + 4'

