



Project: _____

Location: _____

Cat.No: _____

Type: _____

Lamps: _____ Qty: _____

Notes: _____

Ordering guide

Example: EXL3RW

Family	Stencil Faces	Letter Color	Finish	Options
EXL – AC Only Exit EXEL – Nicad Battery Exit	3 – Universal (Single/Double Face w/canopy)	R – Red G – Green	W – White Finish B – Black Finish	SDT – Self-Diagnostic Circuit

Accessories

- WG4 – Wire Guard – Wall Mount Exits
- WG10 – Wire Guard – End Mount Exits

Codes and standards

- UL listed to standard 924
- UL listed for damp locations
- NFPA 101 (Life Safety Code)
- NFPA 70 (National Electric Code), and OSHA standards

Construction

- EX Series is constructed of heavy duty 20 gauge steel finished in a white baked on powder paint providing scratch and corrosion resistance.
- White finish is standard. Black finish is optional.
- 6" letters with 3/4" stroke.
- EX Models are provided with an extra Stencil Faceplate when double face signs are needed.
- Field removable chevron directional indicators.
- EXEL Models: self-diagnostic/self-test circuitry is available as an option. SDT feature monitors all key components and alerts any faults within the circuitry via flashing indicators on display panel. SDT also performs a monthly automatic test per NFPA code.

Installation

- Wall mounted units which are single faced models are supplied with knockouts for attachment to wall surface.
- Ceiling and end mounted units have mounting canopies for attachment to standard 4" electrical box in ceiling or end mount applications.

Electronics

- 120/277 VAC dual voltage input.
- EXEL models utilize a fully automatic, temperature compensating, constant current charger.
- Solid state transfer circuit.
- 24 hour recharge duty cycle.
- Momentary test switch and LED AC on indicator light.
- AC lockout prevents battery discharge prior to initial unit power up saving installation time.
- Low Voltage Battery Disconnect protects the battery from being severely damaged by deep discharge during prolonged power failures.
- Power Consumption
Emergency Only: Red (120)= 3.8 Watts
Red (277)= 3.8 Watts
Green (120)= 3.8 Watts
Green (277)= 3.8 Watts

Lamps

- Exit face illumination is provided by a energy efficient, long-life indirect red or green LEDs. Letter brightness and illumination uniformity exceed UL requirements.

Battery

- EXEL models:
 - Maintenance free, sealed nickel cadmium battery.
 - Operating temperature range of 32°F (0°C) to 122°F (50°C).
 - Provides a minimum of 90 minutes emergency illumination while in the emergency mode.

Warranty


- Unit (including LED lamps) has 5 years full coverage against defects in materials and workmanship from the date of shipment.
- Battery has 5 years of pro-rata coverage.



EX Die-formed steel LED exit sign

Front View Exit

Models
EXL and
EXEL models

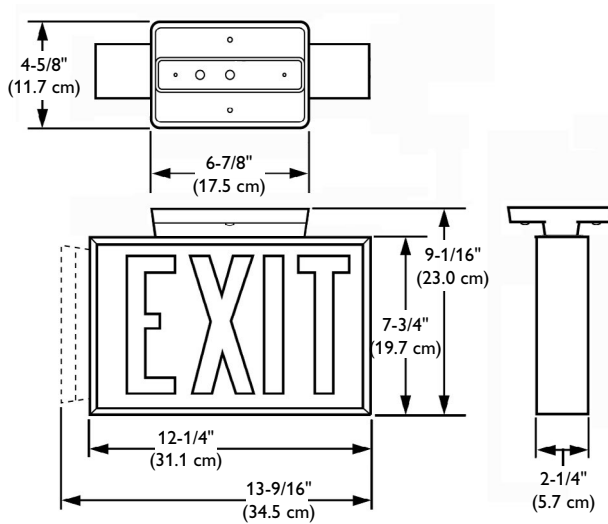

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

